


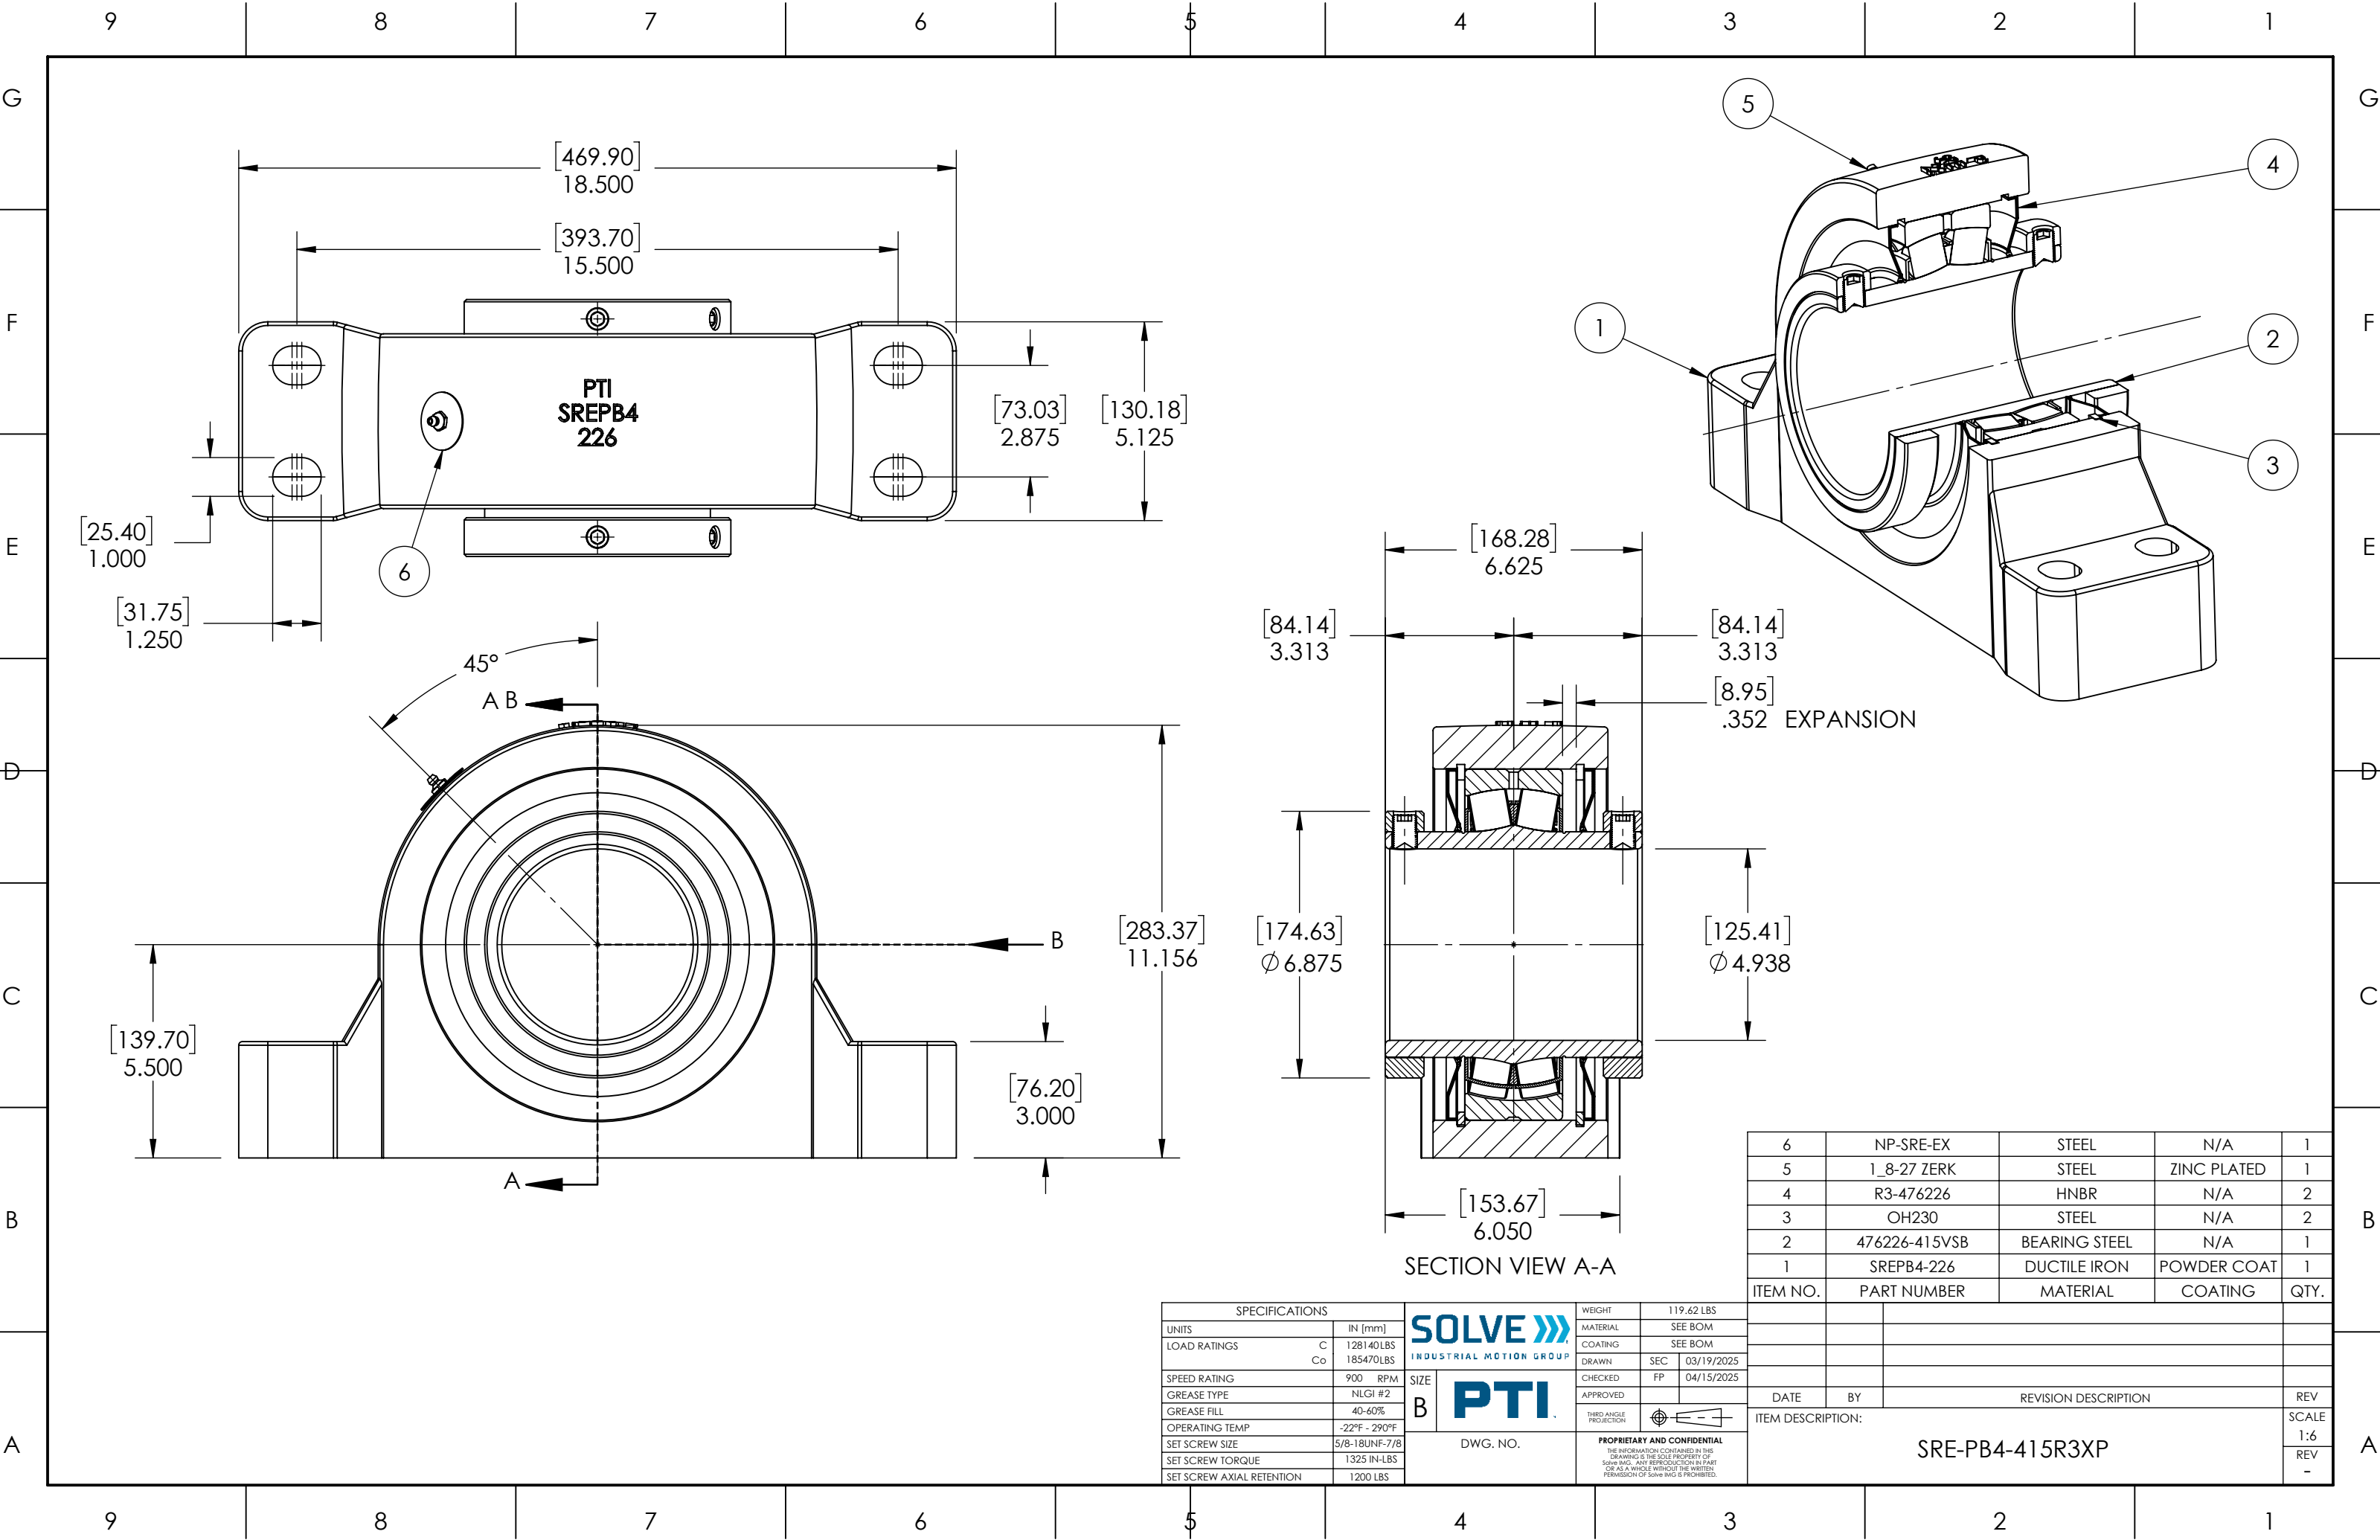

G

F

E

D

C

B

A

G

F

E

D

C

B

A


9 8 7 6 5 4 3 2 1

9 8 7 6 5 4 3 2 1

PTI
SREP4
226

SECTION VIEW A-A

6	NP-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476226	HNBR	N/A	2
3	OH230	STEEL	N/A	2
2	476226-415VSB	BEARING STEEL	N/A	1
1	SREP4-226	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS			SOLVE INDUSTRIAL MOTION GROUP		WEIGHT		119.62 LBS	
UNITS		IN [mm]			MATERIAL		SEE BOM	
LOAD RATINGS		C	128140LBS		COATING		SEE BOM	
		Co	185470LBS		DRAWN		SEC	03/19/2025
SPEED RATING		900		RPM	CHECKED		FP	04/15/2025
GREASE TYPE		NLGI #2		SIZE B	PTI		APPROVED	
GREASE FILL		40-60%					THIRD ANGLE PROJECTION	
OPERATING TEMP		-22°F - 290°F						
SET SCREW SIZE		5/8-18UNF-7/8					PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW TORQUE		1325 IN-LBS						
SET SCREW AXIAL RETENTION		1200 LBS		DWG. NO.				



DWG. NO.

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SRE-PB4-415R3XP			1:6
			REV
			-