


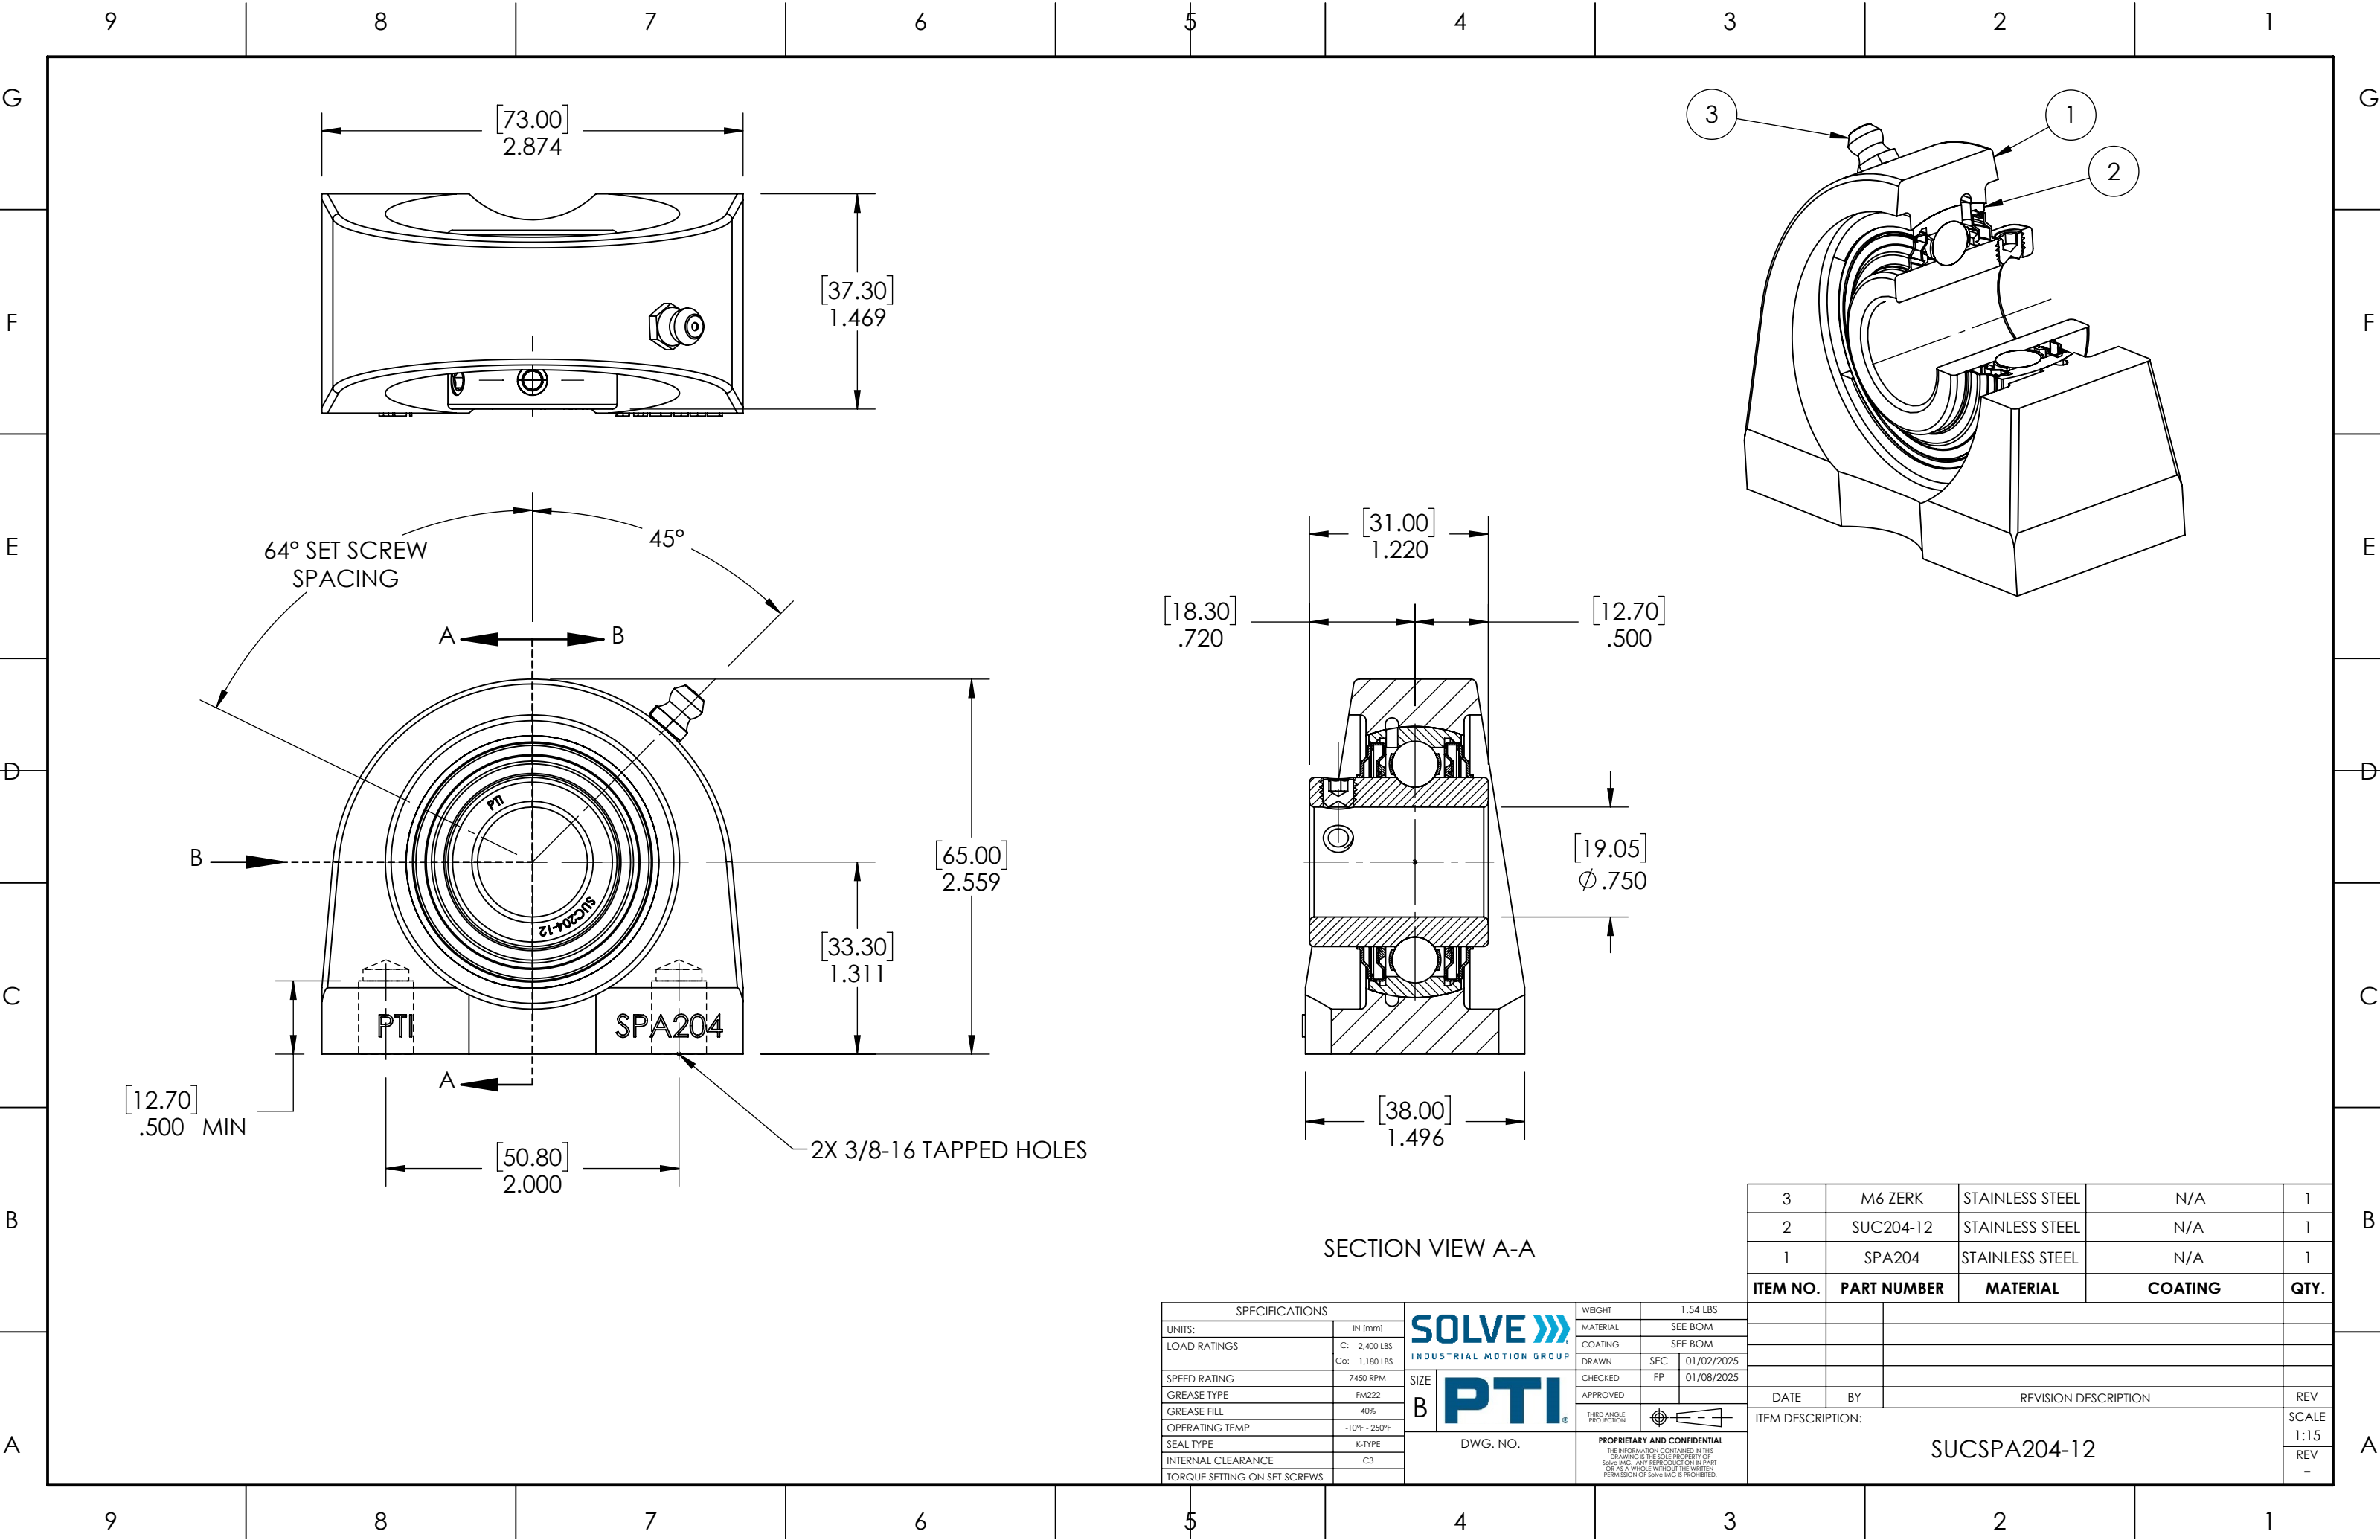

64° SET SCREW
SPACING

45°

A ← B

PTI

SUC204-12

PTI

SPA204

2X 3/8-16 TAPPED HOLES

SECTION VIEW A-A

SPECIFICATIONS	
UNITS:	IN [mm]
LOAD RATINGS	C: 2,400 LBS Co: 1,180 LBS
SPEED RATING	7450 RPM
GREASE TYPE	FM222
GREASE FILL	40%
OPERATING TEMP	-10°F - 250°F
SEAL TYPE	K-TYPE
INTERNAL CLEARANCE	C3
TORQUE SETTING ON SET SCREWS	



WEIGHT	1.54 LBS
MATERIAL	SEE BOM
COATING	SEE BOM
DRAWN	SEC 01/02/2025
CHECKED	FP 01/08/2025
APPROVED	
THIRD ANGLE PROJECTION	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	

3	M6 ZERK	STAINLESS STEEL	N/A	1
2	SUC204-12	STAINLESS STEEL	N/A	1
1	SPA204	STAINLESS STEEL	N/A	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION: SUCSPA204-12				SCALE
				1:15
				REV -