
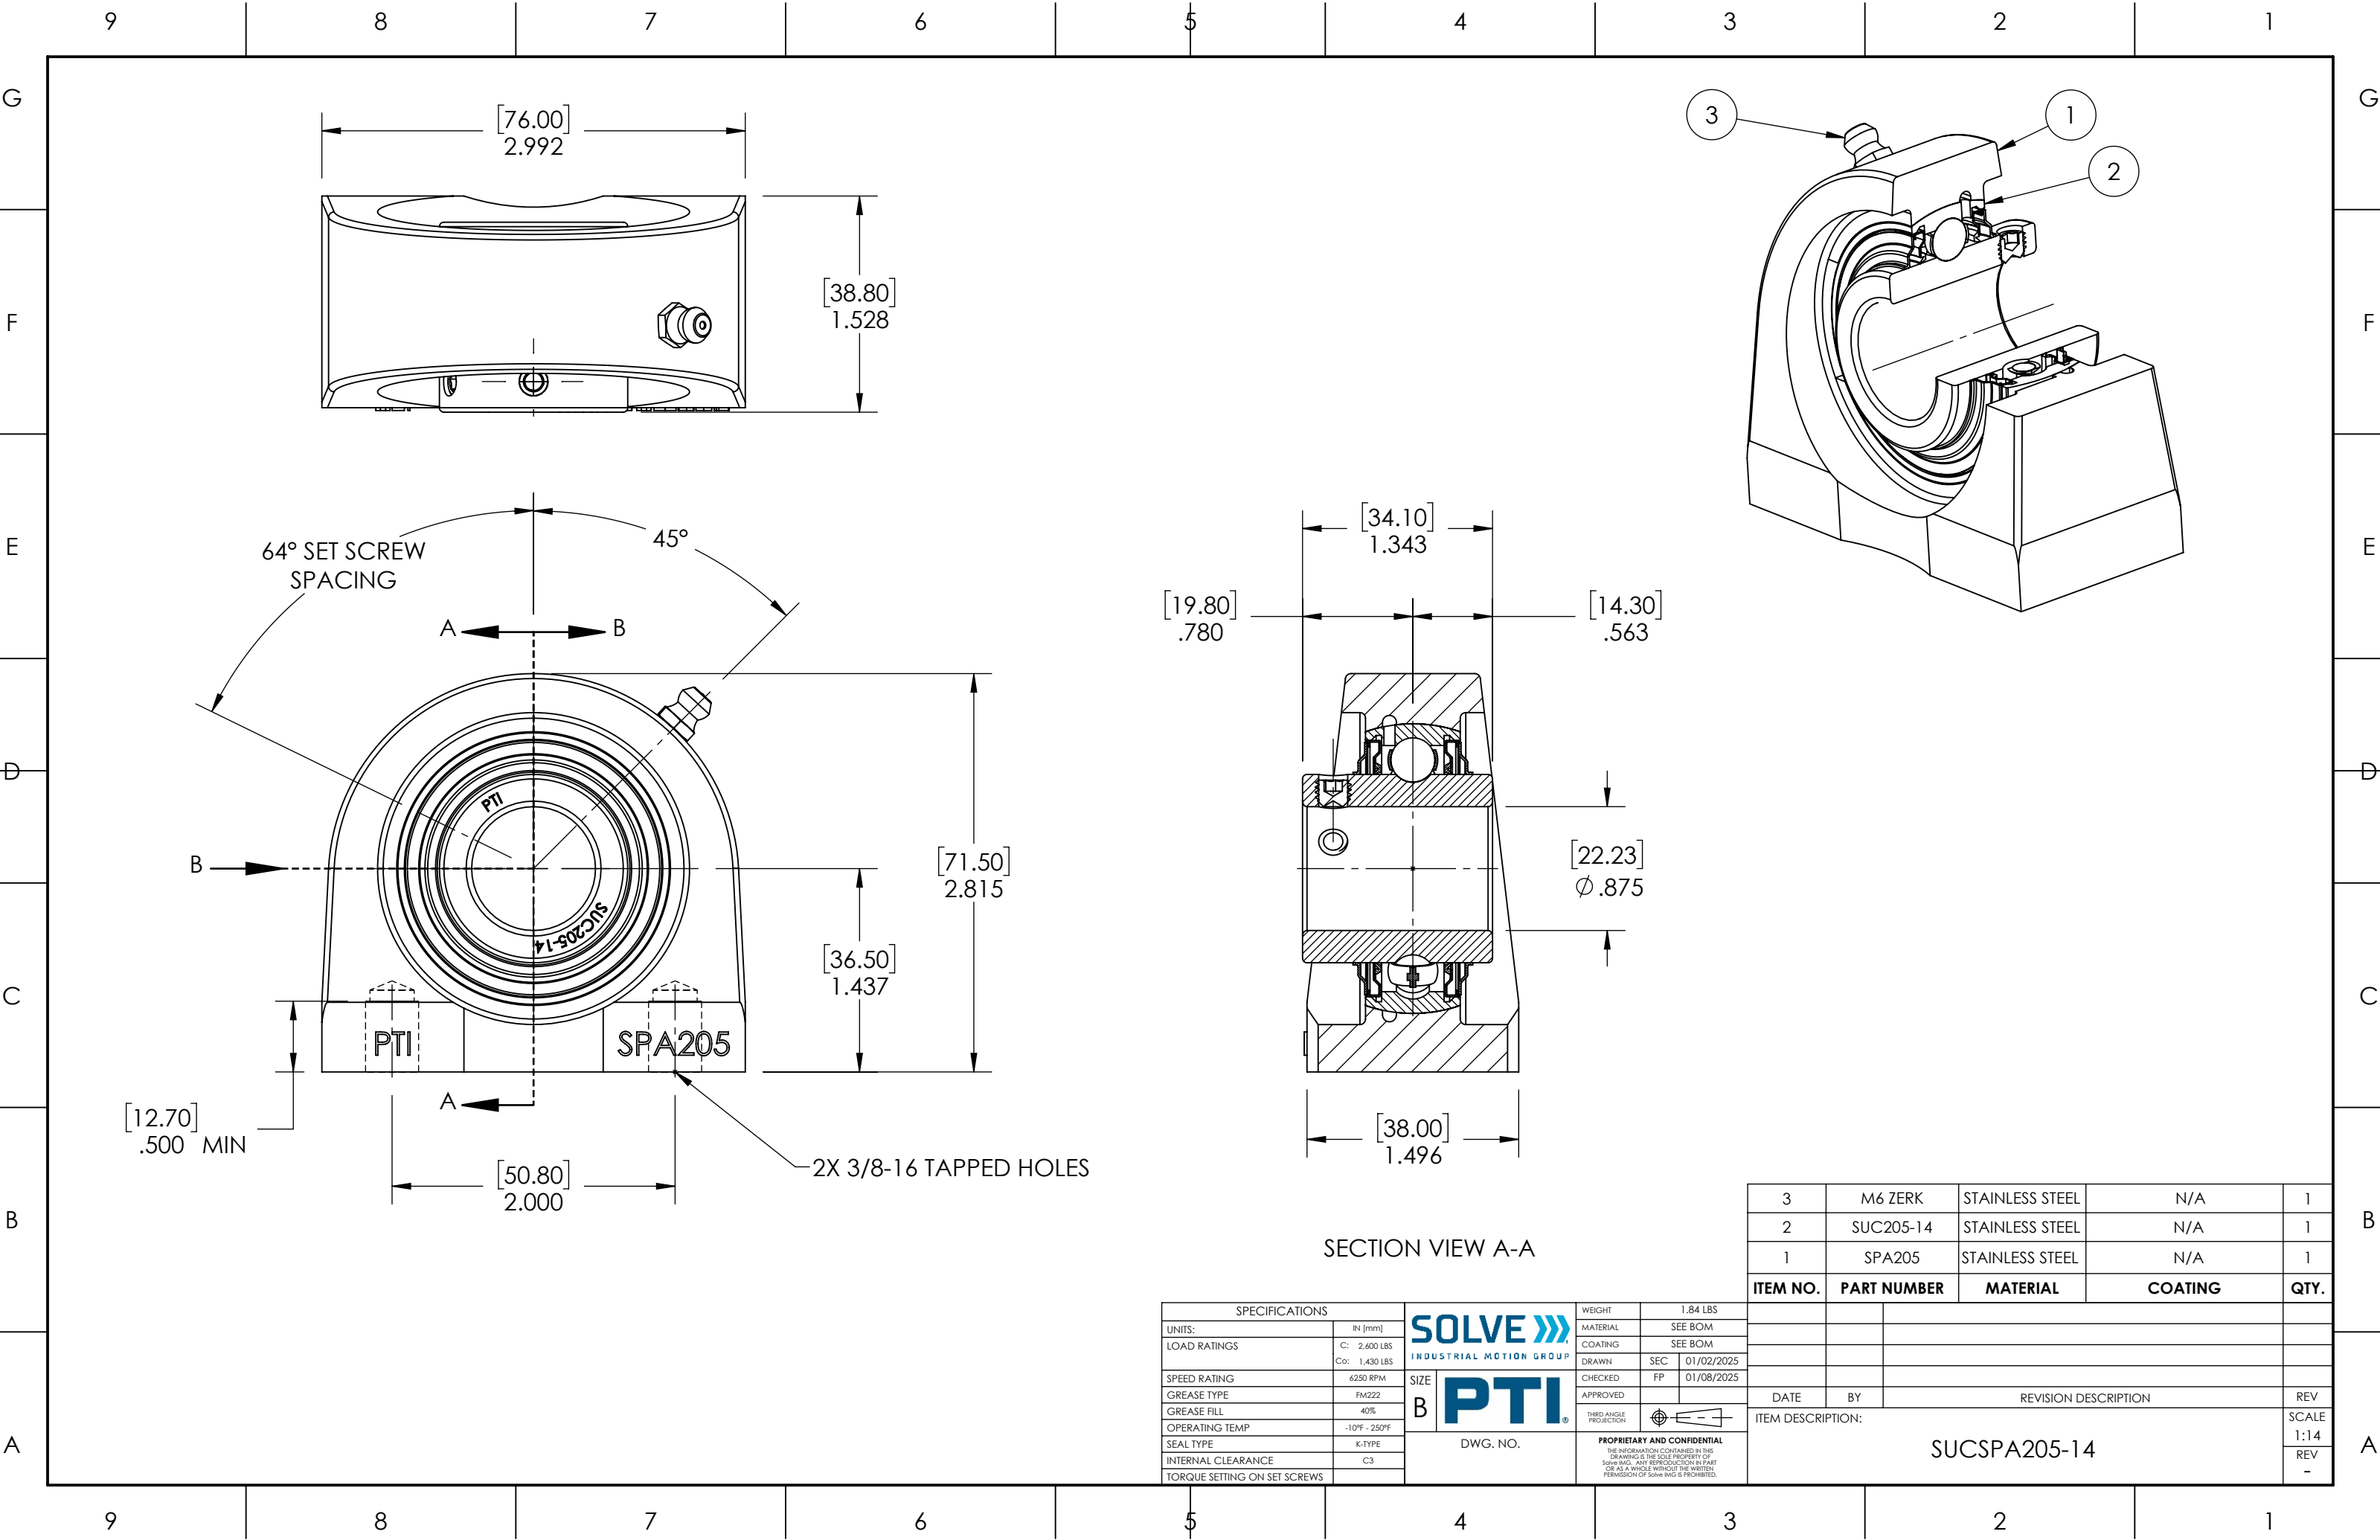




64° SET SCREW
SPACING

2X 3/8-16 TAPPED HOLES

SECTION VIEW A-A

SPECIFICATIONS		SOLVE  INDUSTRIAL MOTION GROUP		WEIGHT	1.84 LBS
UNITS:	IN [mm]			MATERIAL	SEE BOM
LOAD RATINGS	C: 2,600 LBS Co: 1,430 LBS	SIZE 	COATING	SEE BOM	
SPEED RATING	6250 RPM		DRAWN	SEC 01/02/2025	
GREASE TYPE	FM222		CHECKED	FP 01/08/2025	
GREASE FILL	40%		APPROVED		
OPERATING TEMP	-10°F - 250°F				
SEAL TYPE	K-TYPE				
INTERNAL CLEARANCE	C3				
TORQUE SETTING ON SET SCREWS		DWG. NO.		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	

3	M6 ZERK	STAINLESS STEEL	N/A	1
2	SUC205-14	STAINLESS STEEL	N/A	1
1	SPA205	STAINLESS STEEL	N/A	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE BY REVISION DESCRIPTION REV				
ITEM DESCRIPTION: SUCSPA205-14 SCALE 1:14 REV -				