


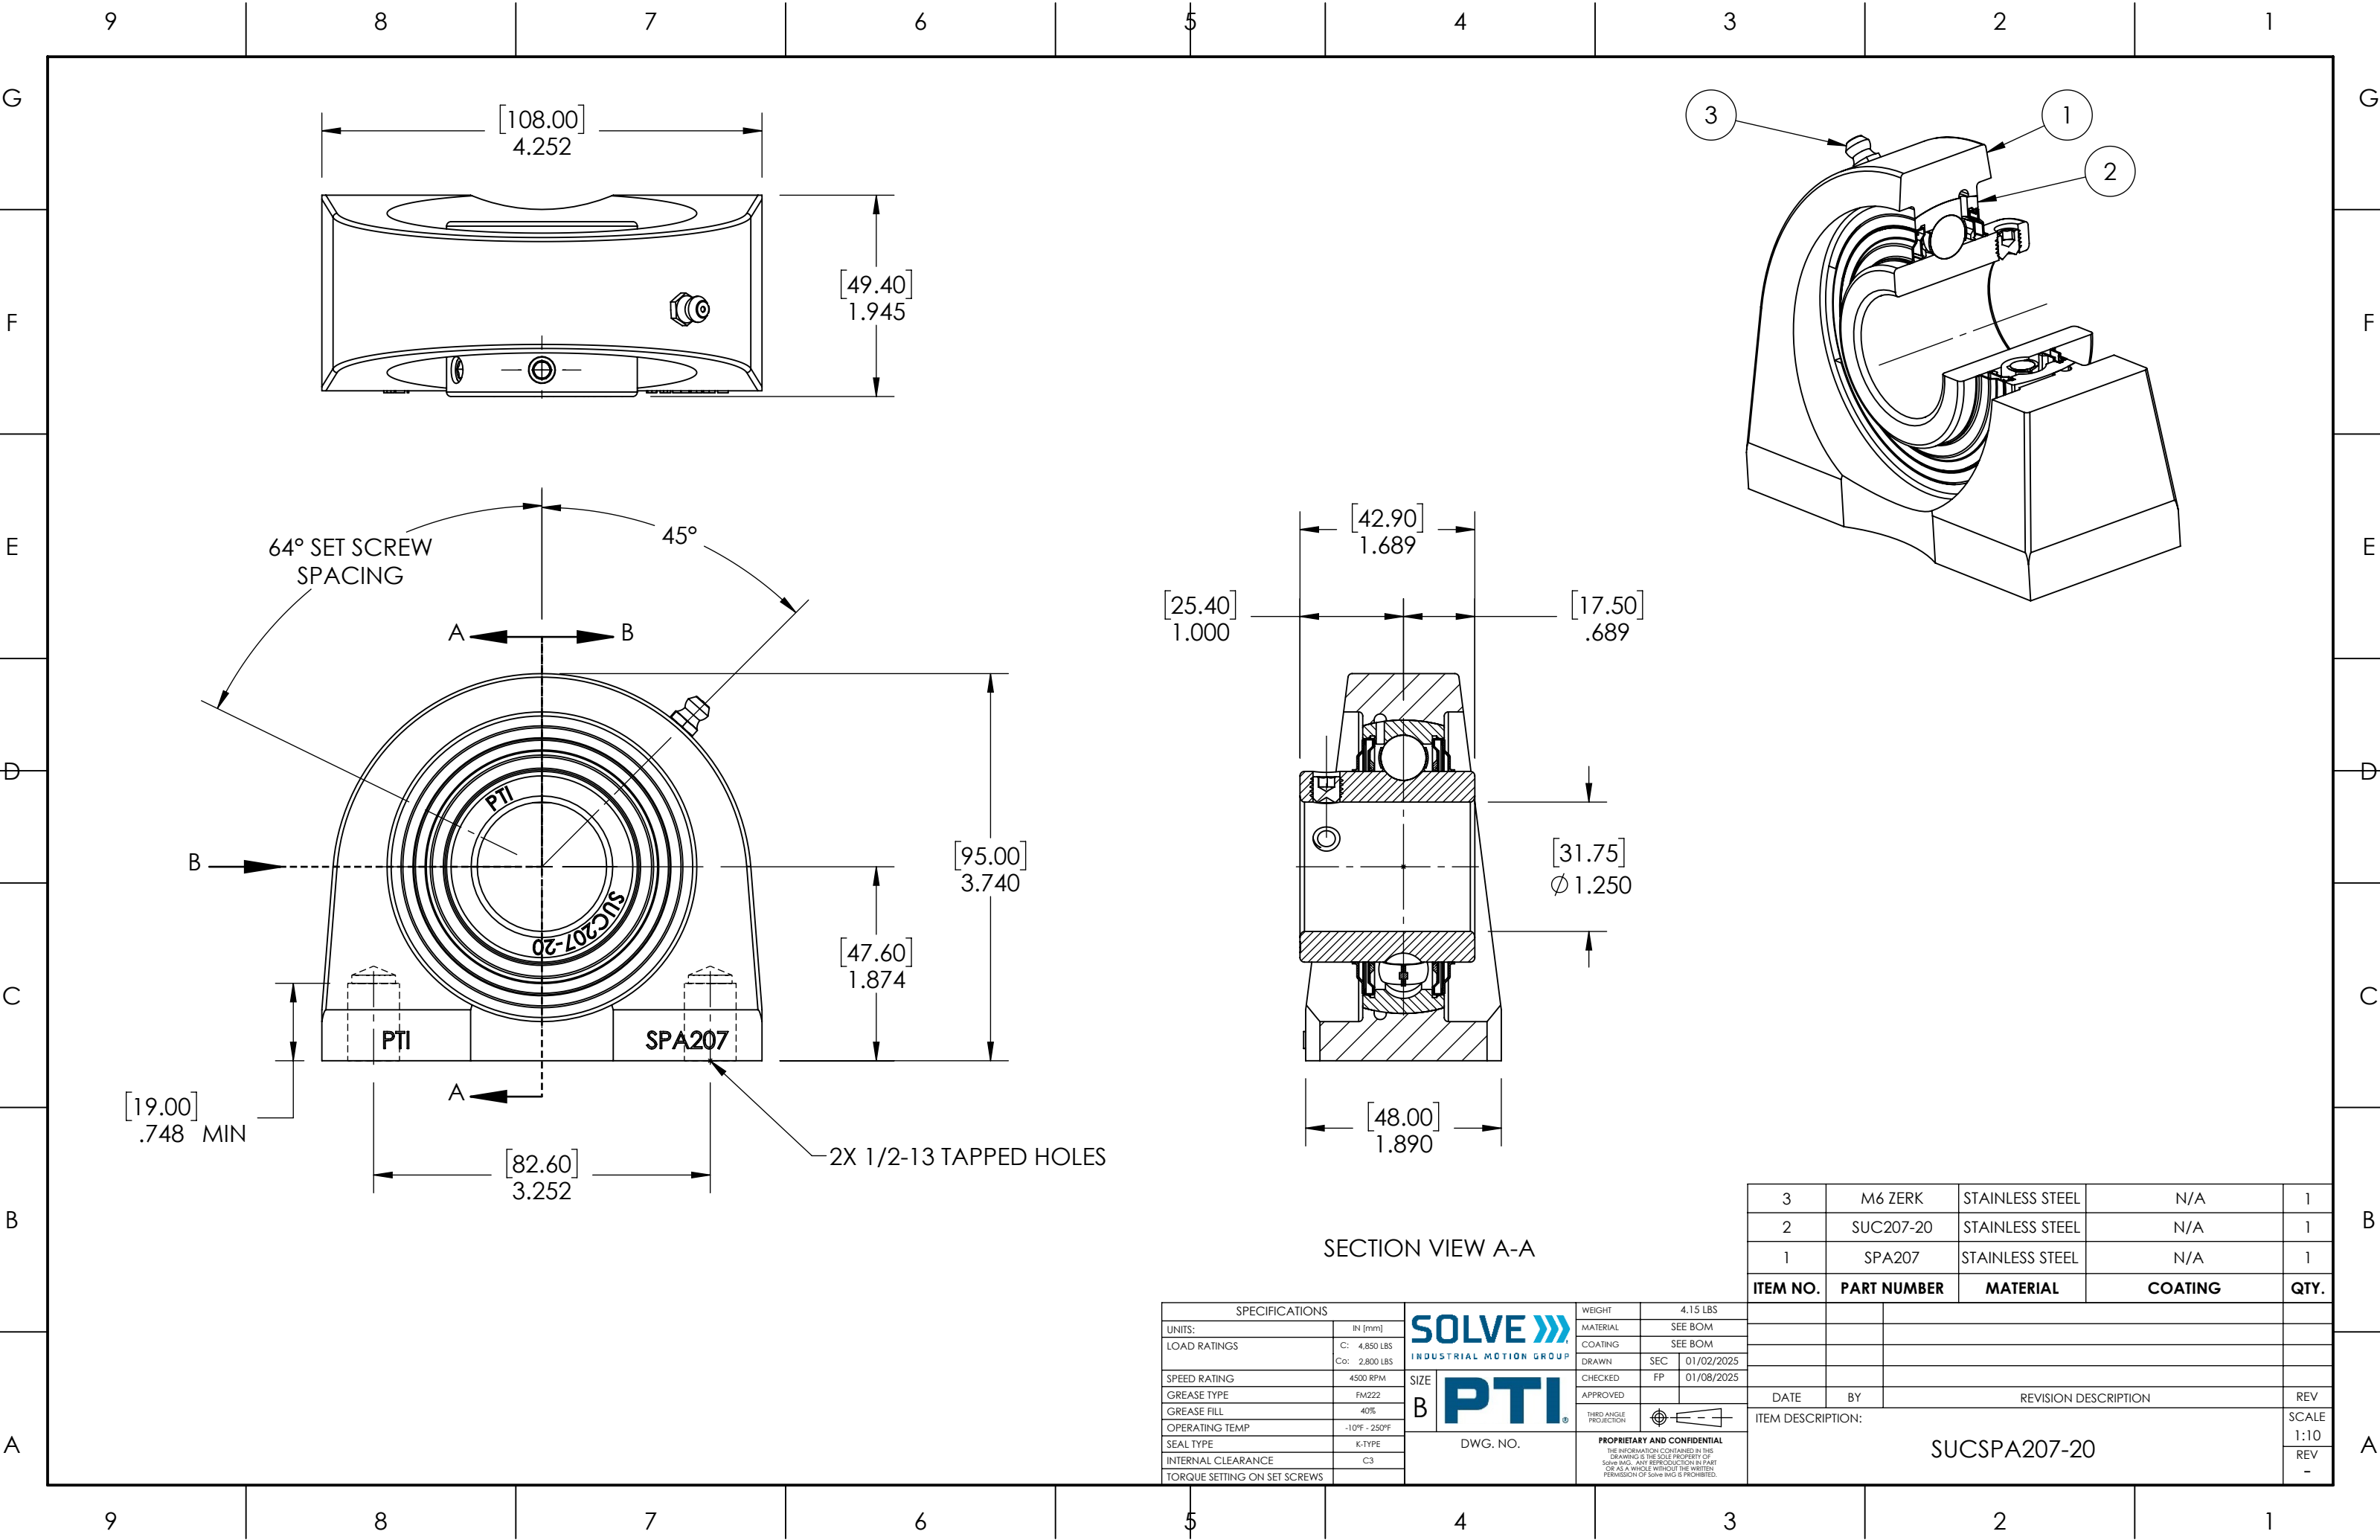

SECTION VIEW A-A

SPECIFICATIONS		SOLVE INDUSTRIAL MOTION GROUP		WEIGHT		4.15 LBS	
UNITS:	IN [mm]			MATERIAL		SEE BOM	
LOAD RATINGS	C: 4,850 LBS Co: 2,800 LBS	SIZE B	PTI DWG. NO.	COATING		SEE BOM	
SPEED RATING	4500 RPM			DRAWN	SEC	01/02/2025	
GREASE TYPE	FM222			CHECKED	FP	01/08/2025	
GREASE FILL	40%			APPROVED		THIRD ANGLE PROJECTION 	
OPERATING TEMP	-10°F - 250°F						
SEAL TYPE	K-TYPE			PROPRIETARY AND CONFIDENTIAL			
INTERNAL CLEARANCE	C3			THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.			
TORQUE SETTING ON SET SCREWS							

3	M6 ZERK	STAINLESS STEEL	N/A	1
2	SUC207-20	STAINLESS STEEL	N/A	1
1	SPA207	STAINLESS STEEL	N/A	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION: SUCSPA207-20				SCALE
				1:10
				REV
				-