
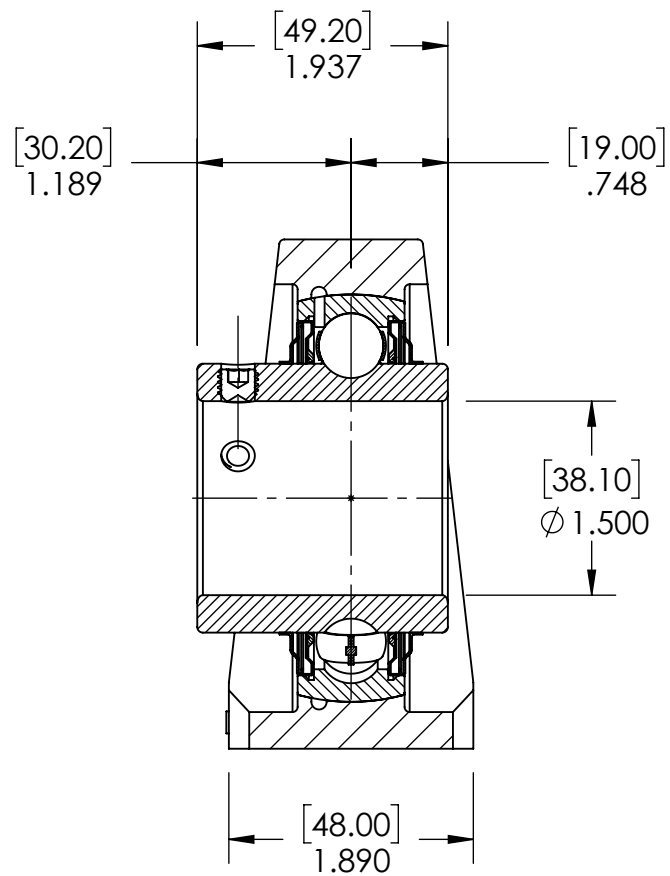
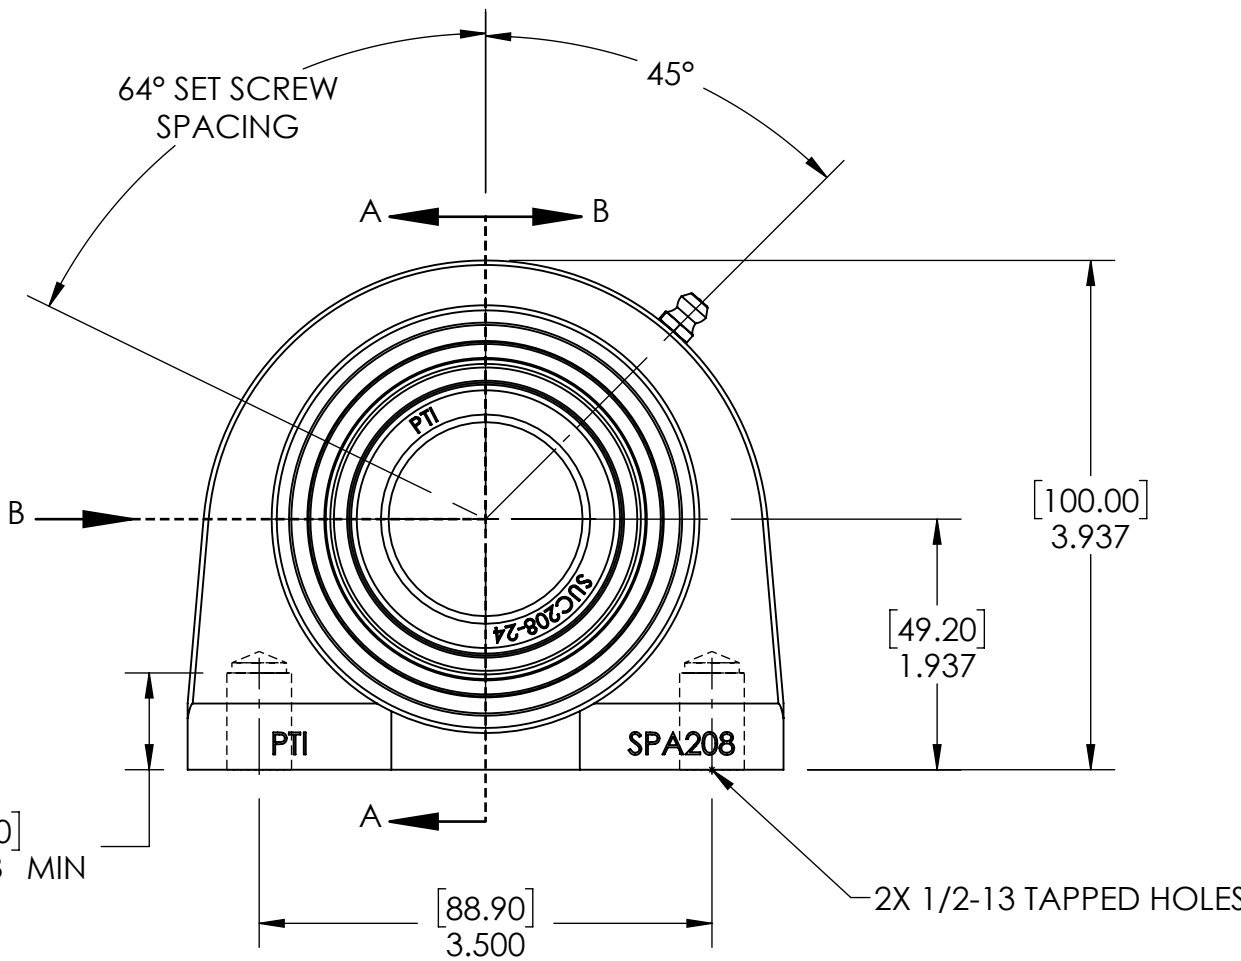
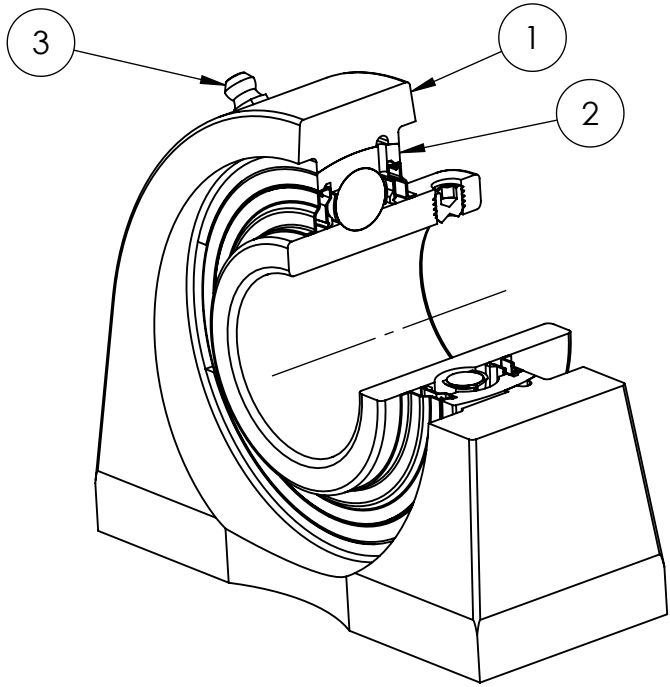
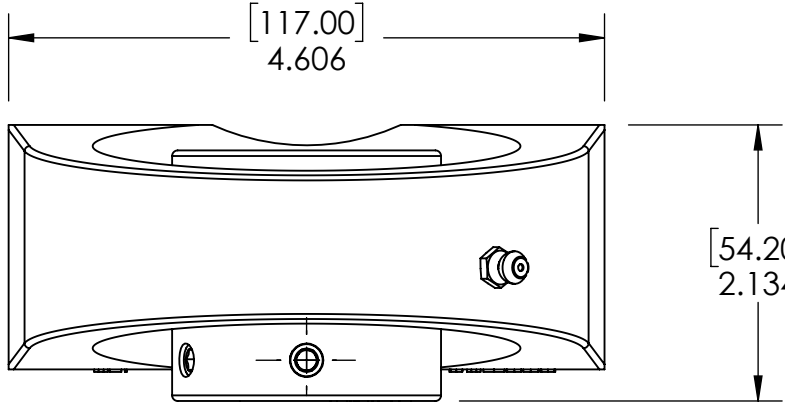
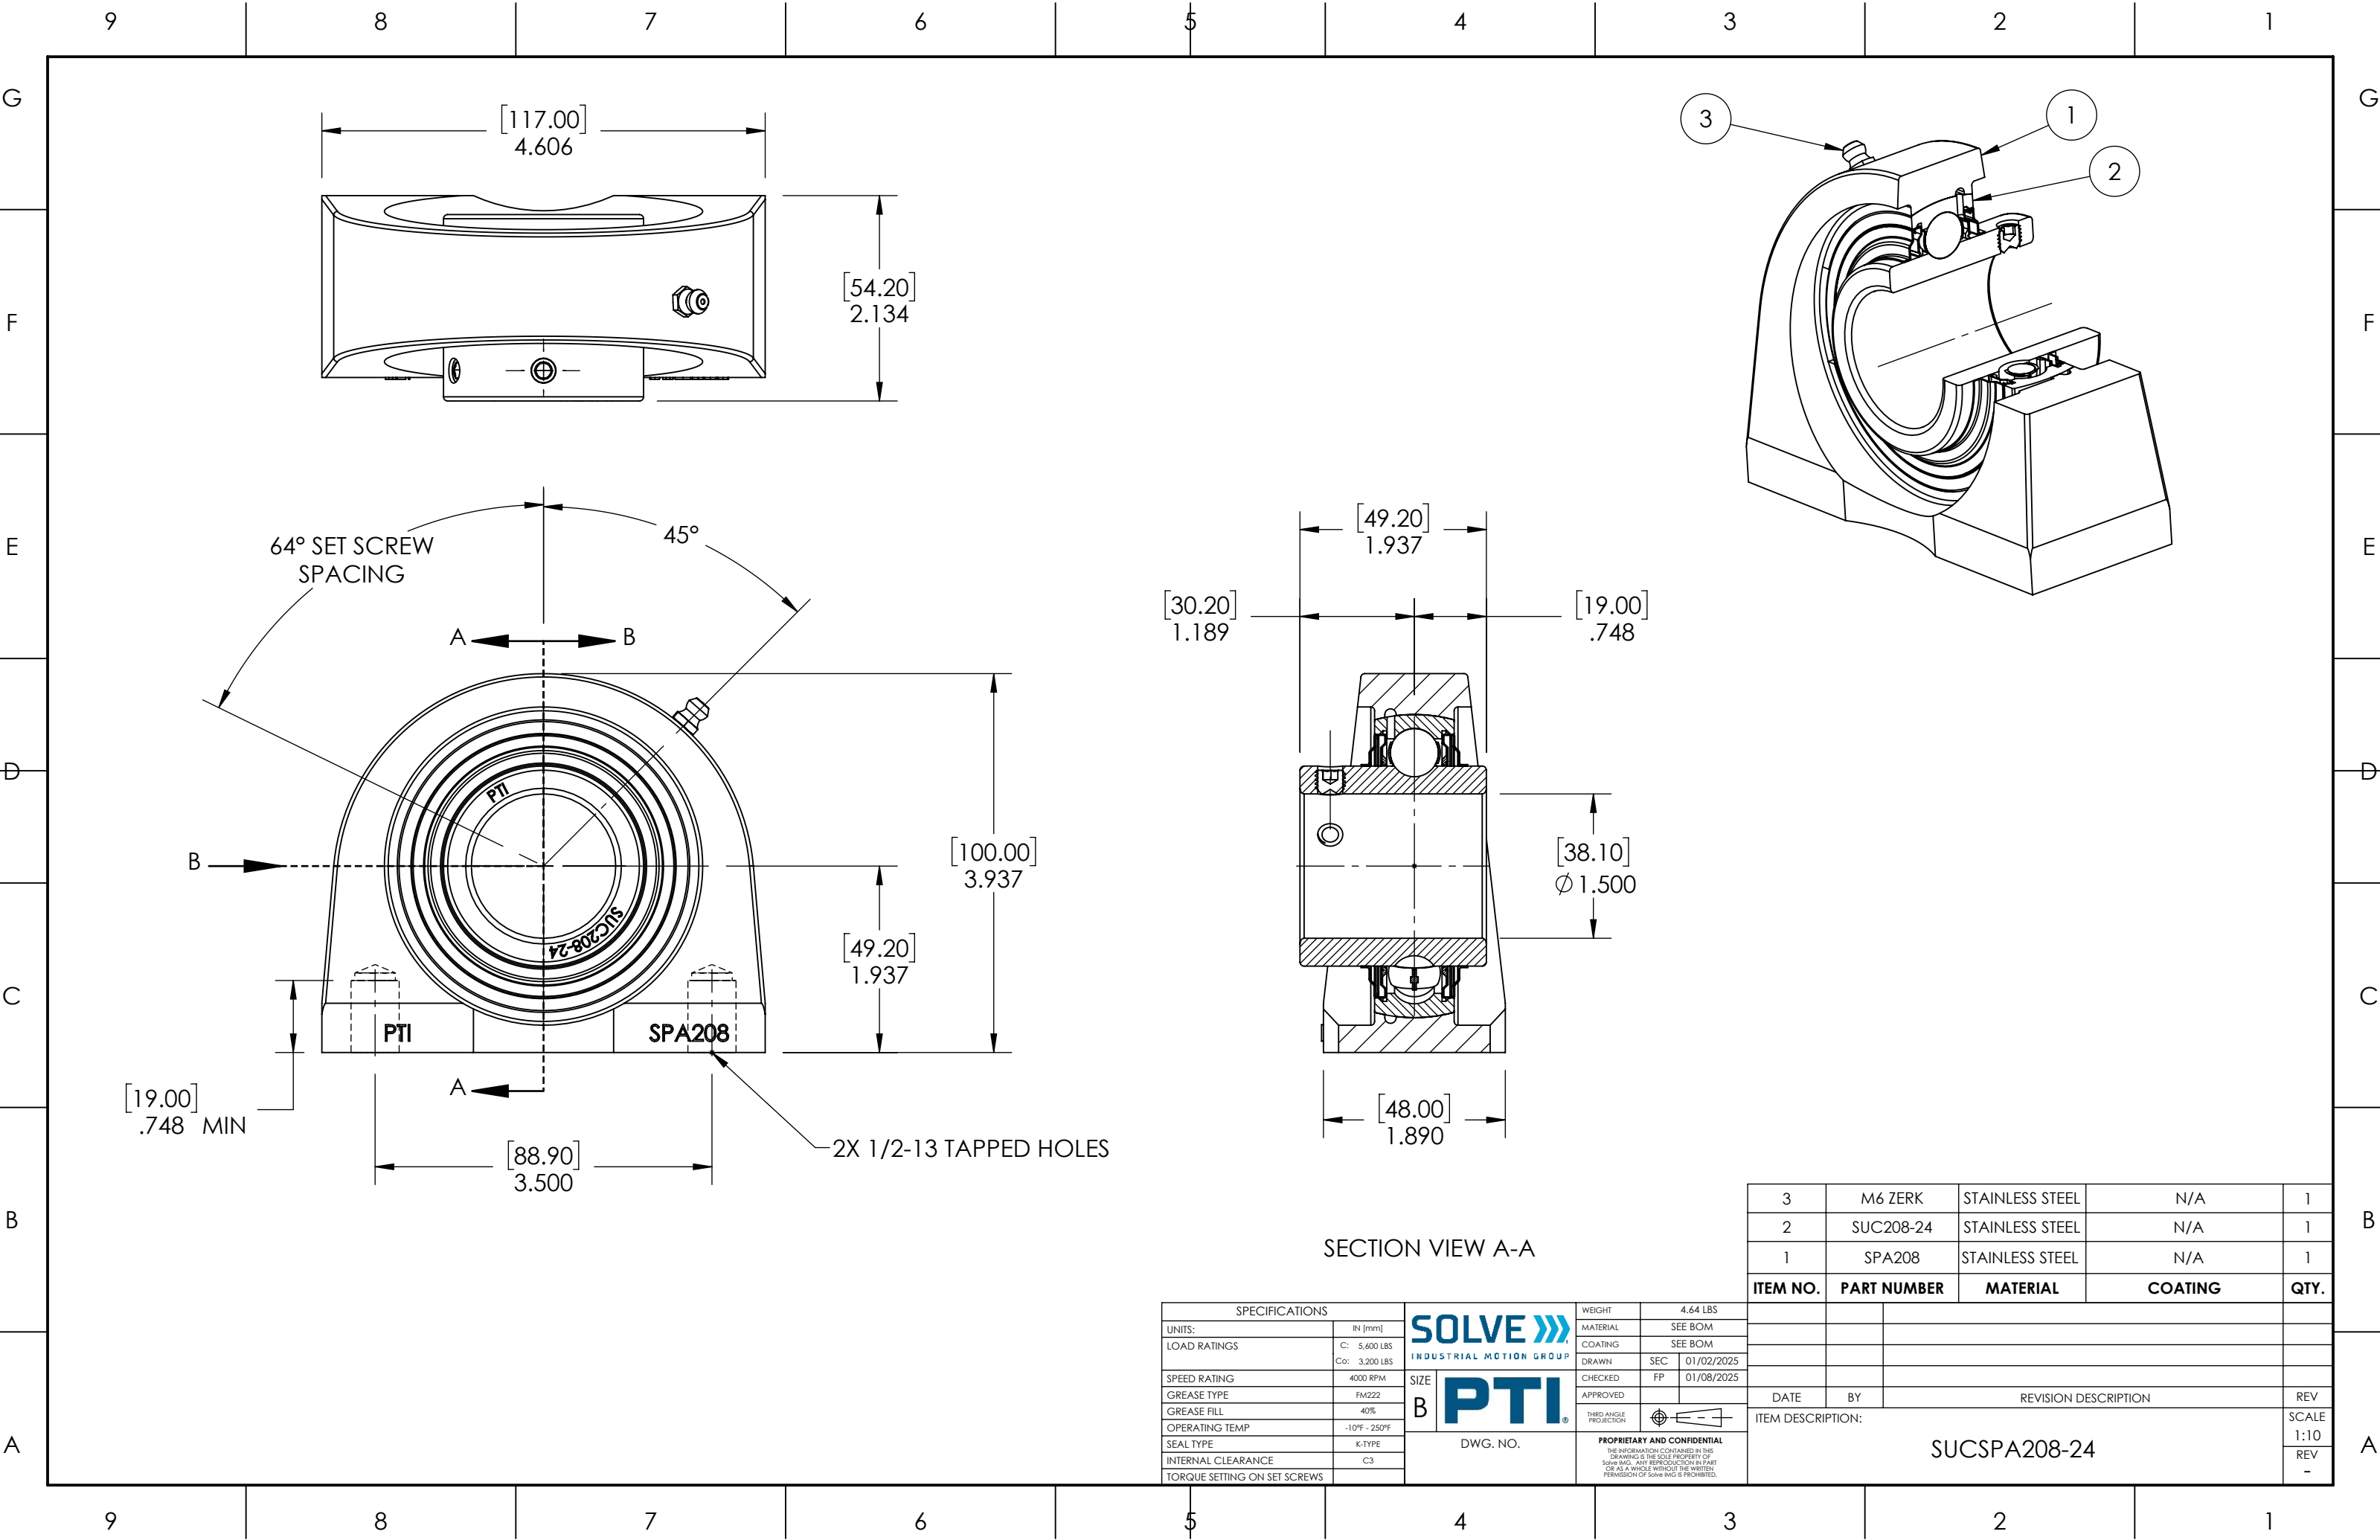




SECTION VIEW A-A

3	M6 ZERK	STAINLESS STEEL	N/A	1
2	SUC208-24	STAINLESS STEEL	N/A	1
1	SPA208	STAINLESS STEEL	N/A	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE BY REVISION DESCRIPTION REV				
ITEM DESCRIPTION: SUCSPA208-24				SCALE 1:10
				REV -

SPECIFICATIONS		SOLVE  INDUSTRIAL MOTION GROUP		WEIGHT	4.64 LBS
UNITS:	IN [mm]			MATERIAL	SEE BOM
LOAD RATINGS	C: 5,600 LBS Co: 3,200 LBS	SIZE B  DWG. NO.	COATING	SEE BOM	
SPEED RATING	4000 RPM		DRAWN	SEC 01/02/2025	
GREASE TYPE	FM222		CHECKED	FP 01/08/2025	
GREASE FILL	40%		APPROVED		
OPERATING TEMP	-10°F - 250°F		THIRD ANGLE PROJECTION 		
SEAL TYPE	K-TYPE				
INTERNAL CLEARANCE	C3				
TORQUE SETTING ON SET SCREWS			PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.		