
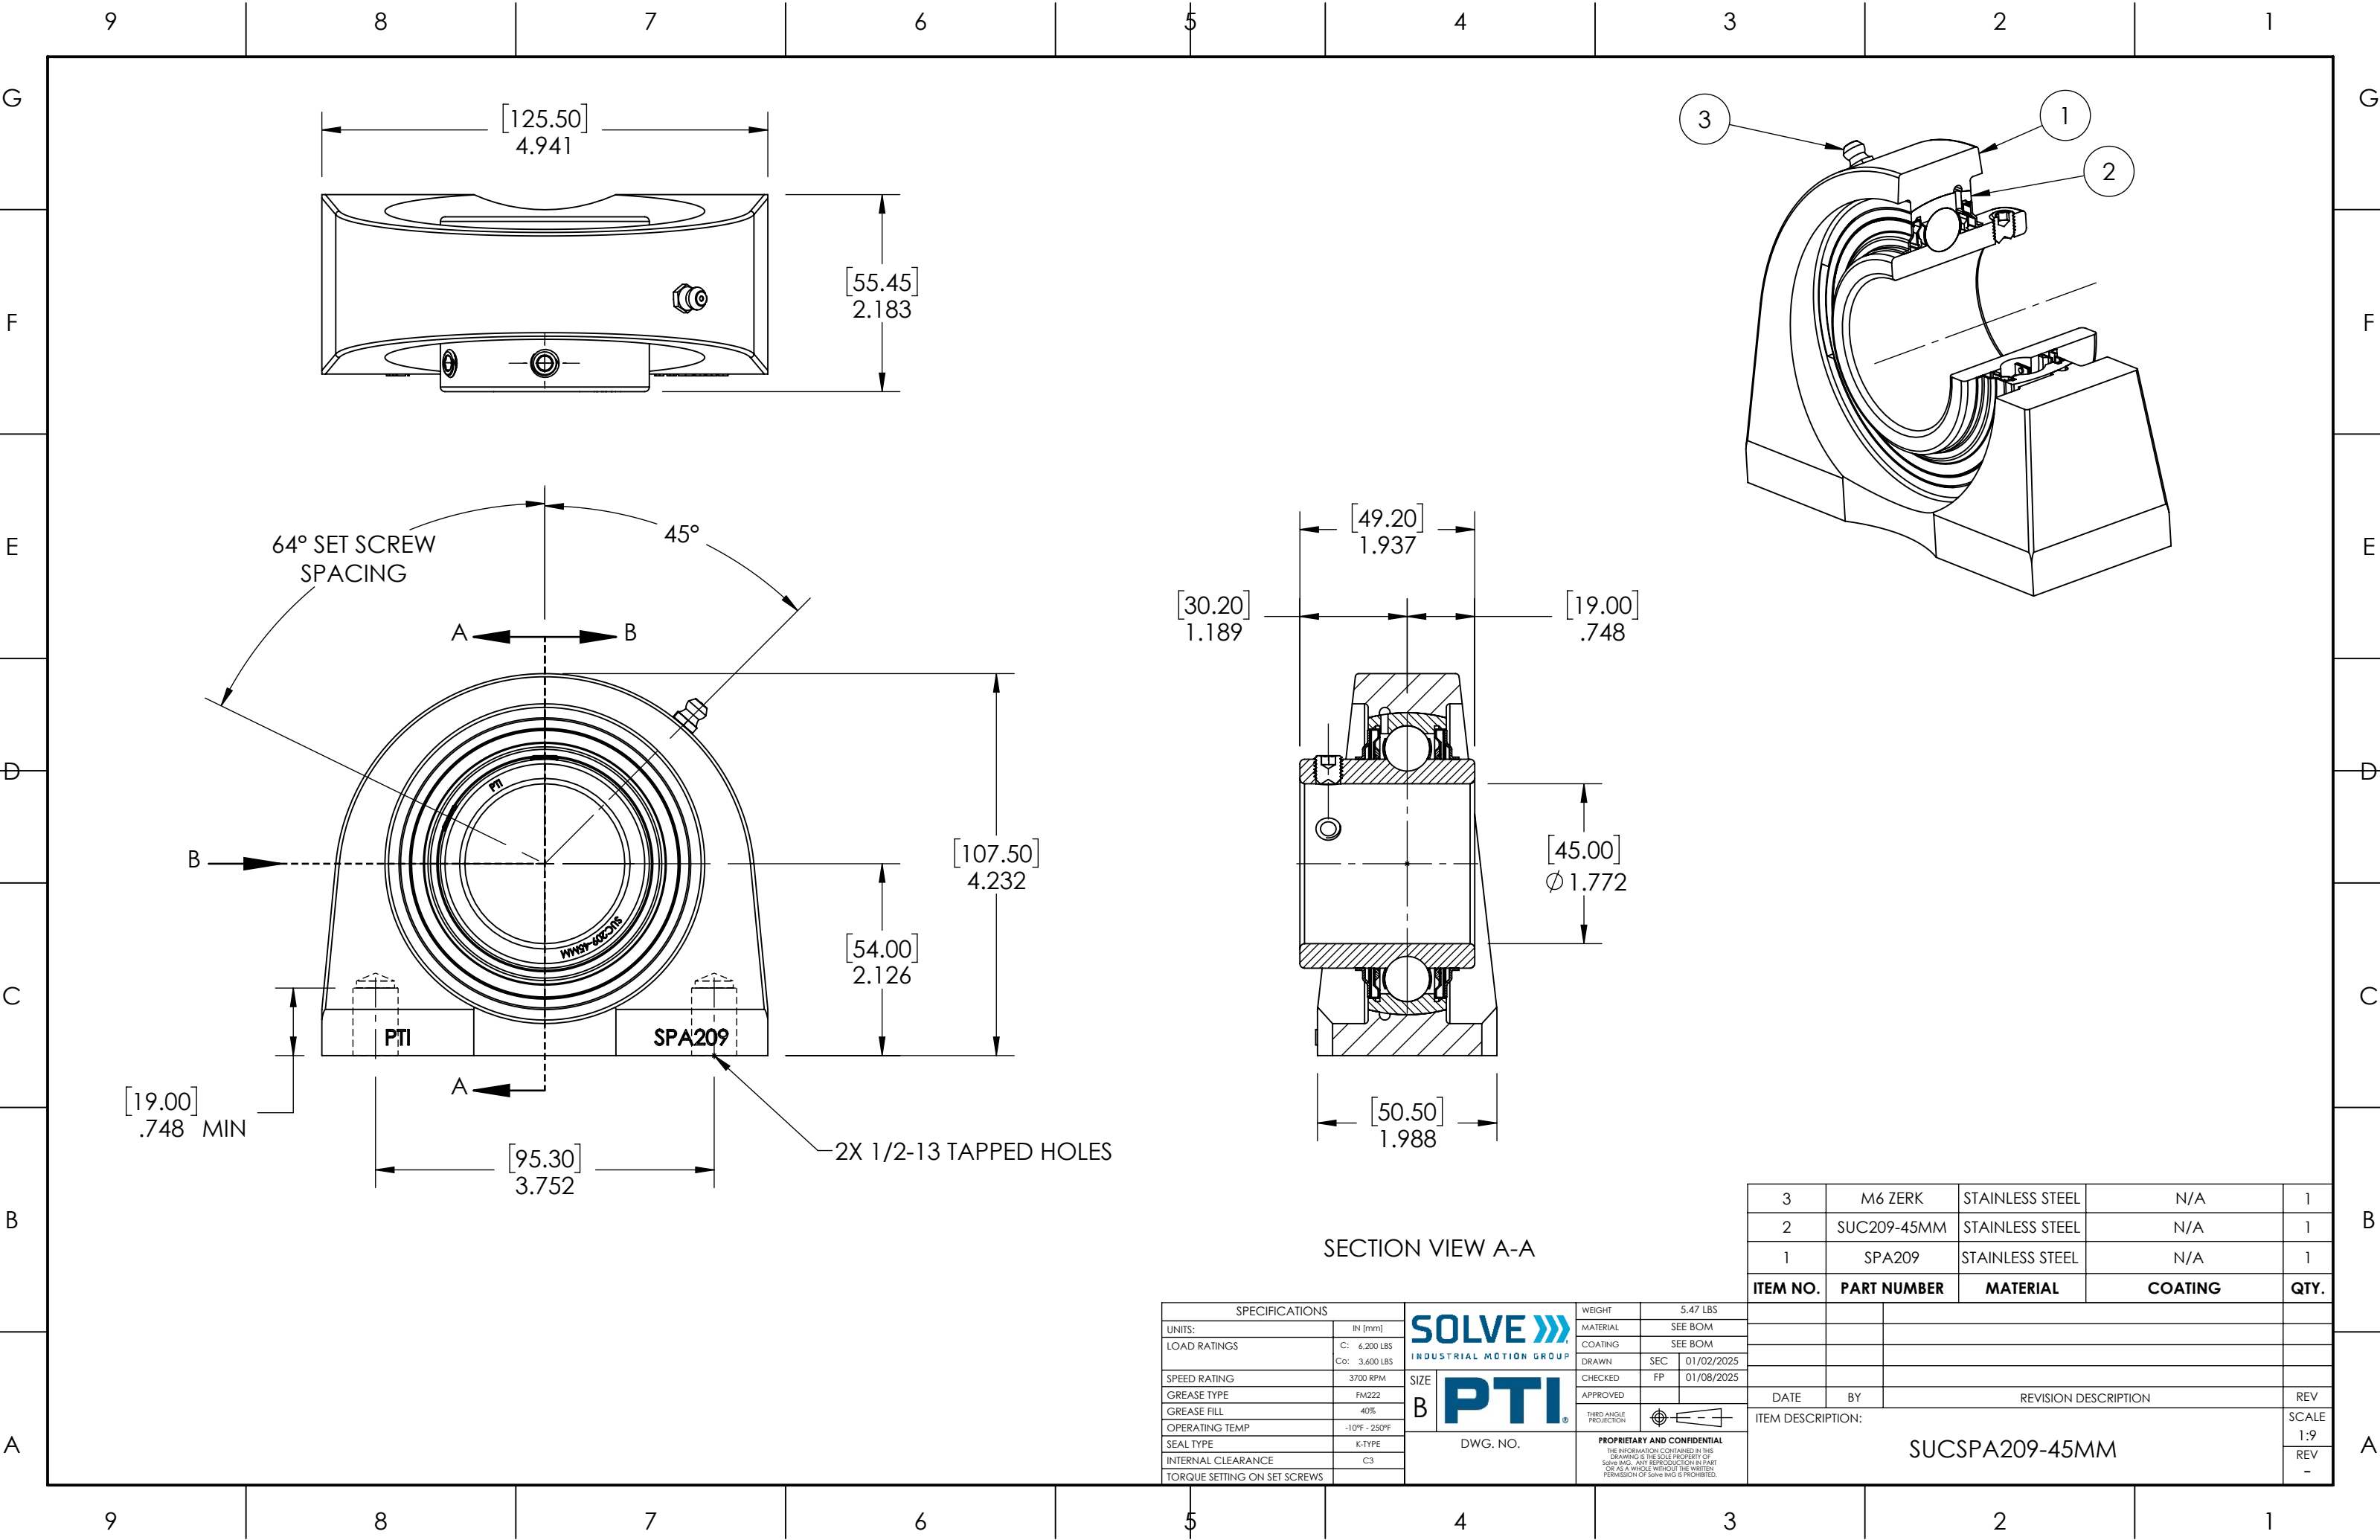




G
F
E
D
C
B
A

G
F
E
D
C
B
A

SECTION VIEW A-A

SPECIFICATIONS		SOLVE 		WEIGHT		5.47 LBS	
UNITS:	IN [mm]	MATERIAL		SEE BOM			
LOAD RATINGS	C: 6,200 LBS Co: 3,600 LBS	COATING		SEE BOM			
SPEED RATING	3700 RPM	DRAWN		SEC	01/02/2025		
GREASE TYPE	FM222	CHECKED		FP	01/08/2025		
GREASE FILL	40%	APPROVED					
OPERATING TEMP	-10°F - 250°F	THIRD ANGLE PROJECTION					
SEAL TYPE	K-TYPE	DWG. NO.		PROPRIETARY AND CONFIDENTIAL			
INTERNAL CLEARANCE	C3			THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.			
TORQUE SETTING ON SET SCREWS							

3	M6 ZERK	STAINLESS STEEL	N/A	1
2	SUC209-45MM	STAINLESS STEEL	N/A	1
1	SPA209	STAINLESS STEEL	N/A	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION: SUCSPA209-45MM				SCALE
				1:9
				REV -