


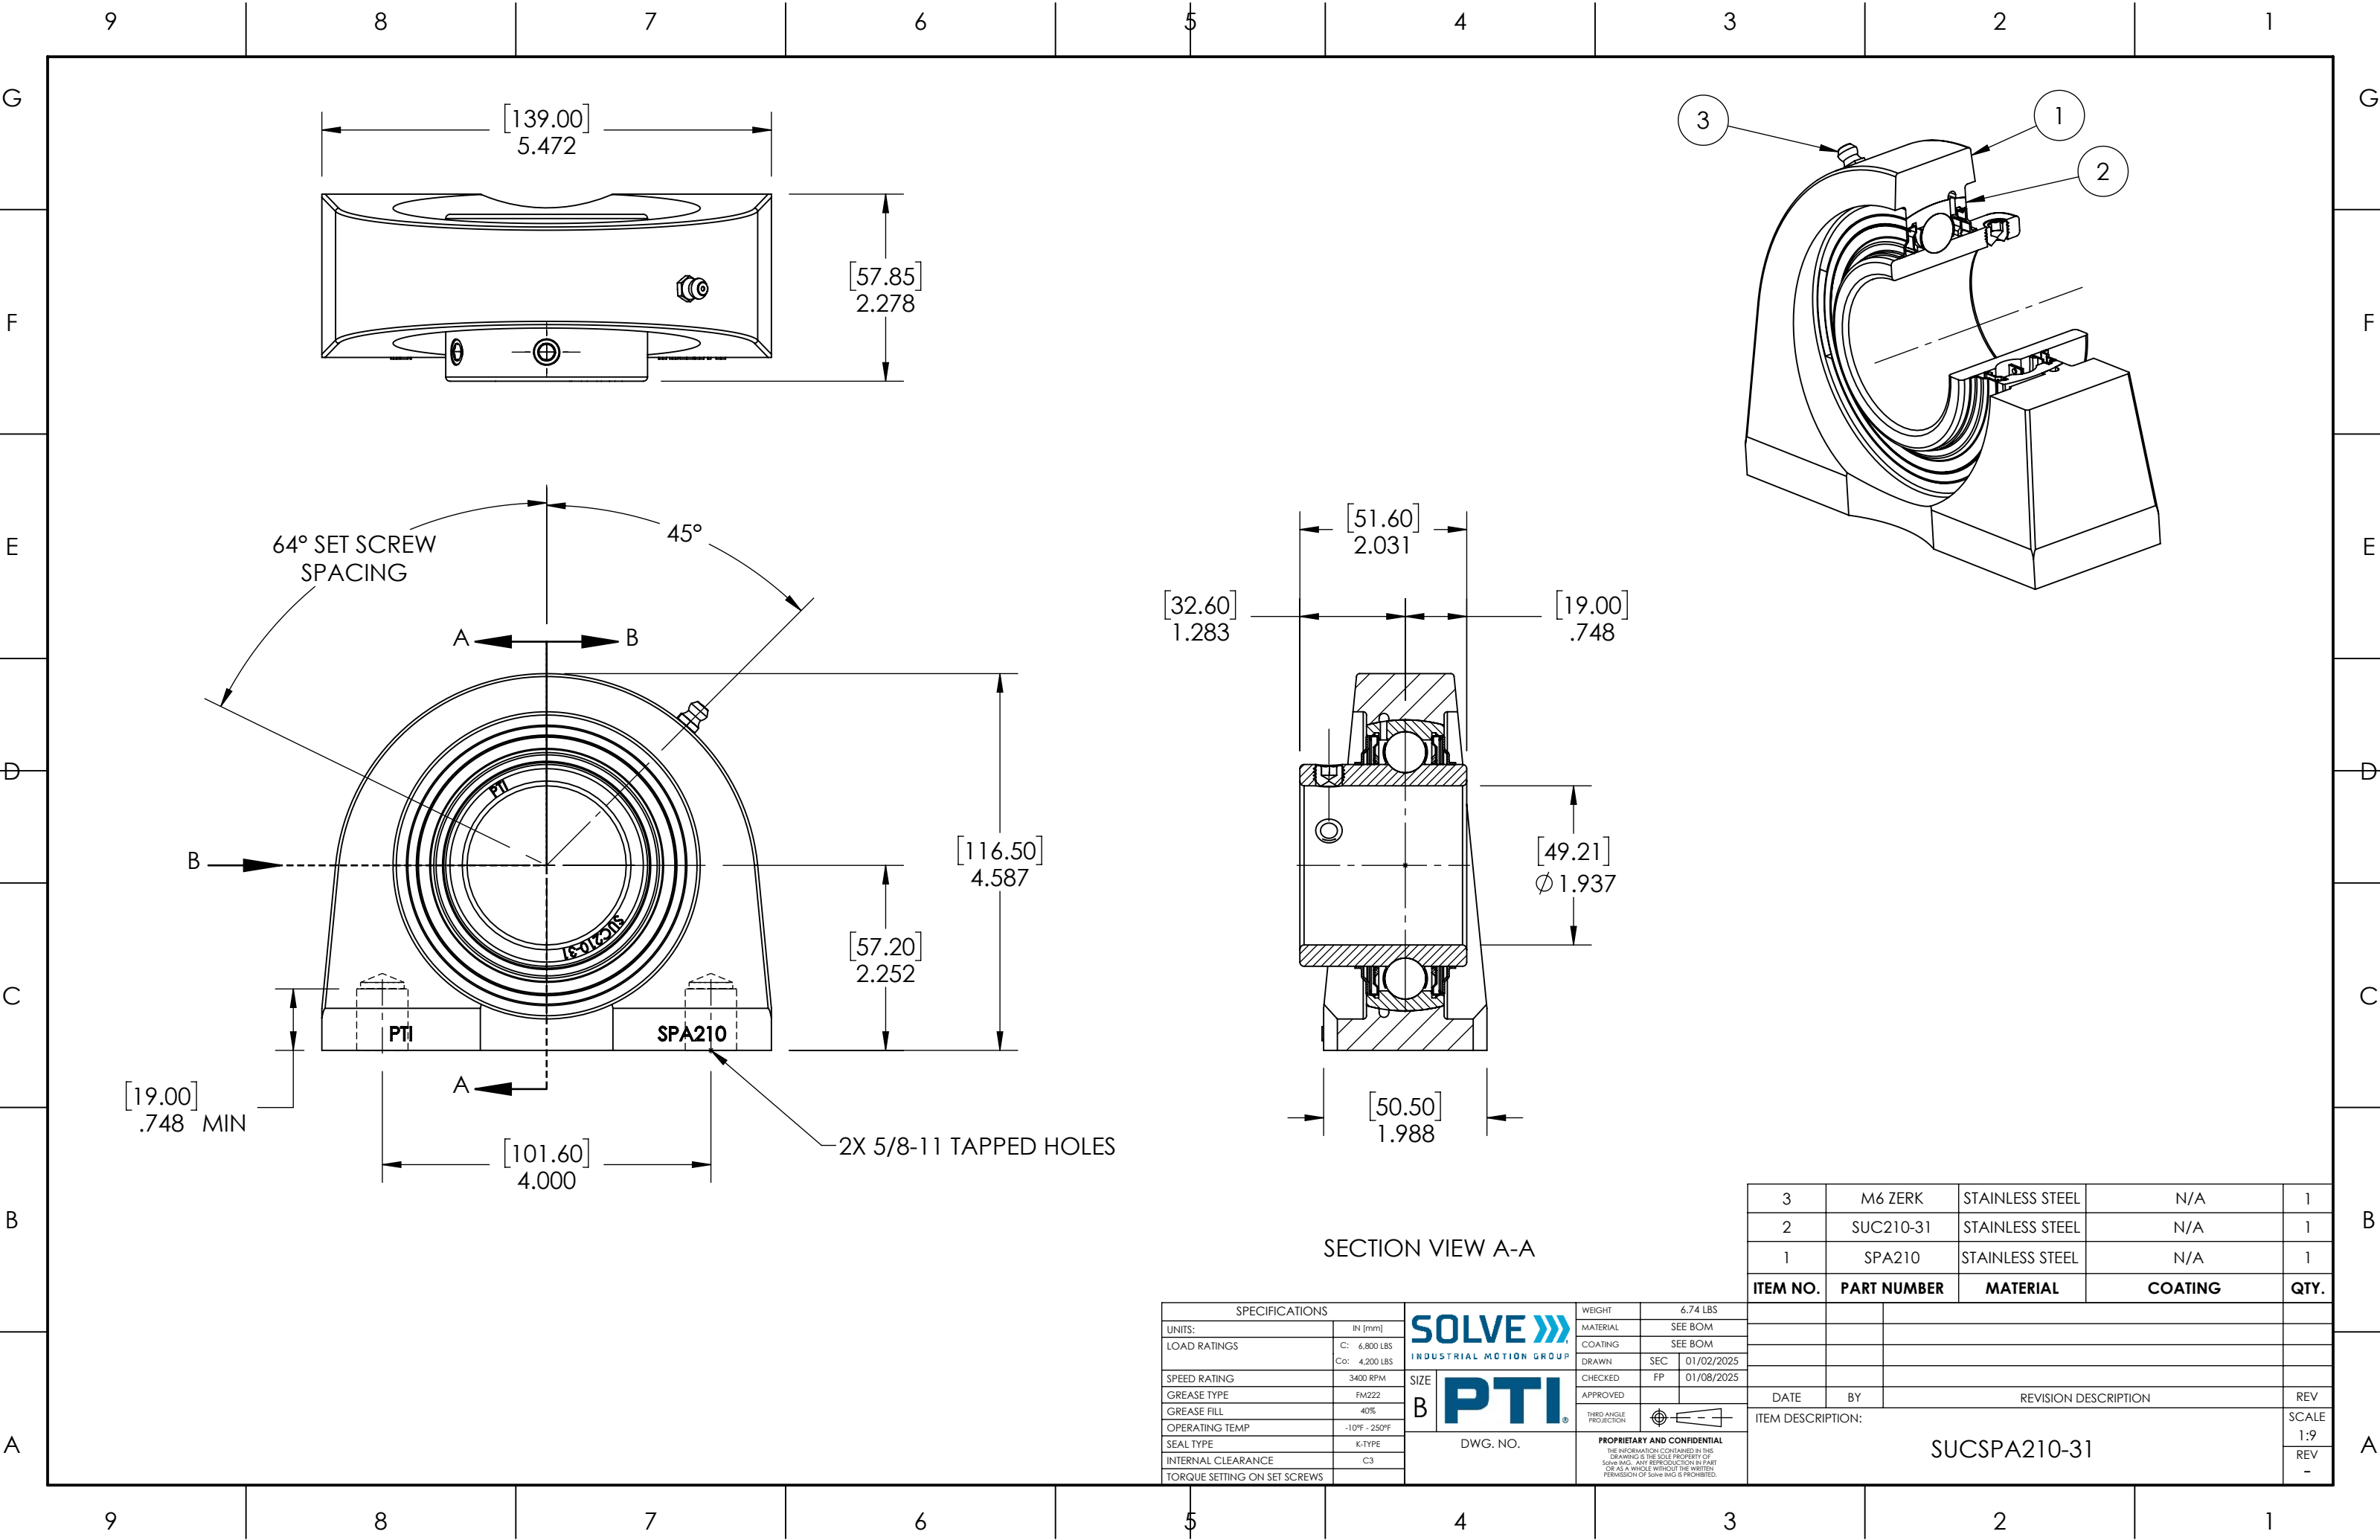

G
F
E
D
C
B
A

G
F
E
D
C
B
A

SECTION VIEW A-A

SPECIFICATIONS		SOLVE 		WEIGHT	
UNITS:	IN [mm]	INDUSTRIAL MOTION GROUP PTI		6.74 LBS	
LOAD RATINGS	C: 6,800 LBS Co: 4,200 LBS			SEE BOM	
SPEED RATING	3400 RPM			SEE BOM	
GREASE TYPE	FM222			DRAWN SEC 01/02/2025	
GREASE FILL	40%			CHECKED FP 01/08/2025	
OPERATING TEMP	-10°F - 250°F			APPROVED 	
SEAL TYPE	K-TYPE	DWG. NO.		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
INTERNAL CLEARANCE	C3				
TORQUE SETTING ON SET SCREWS					

3	M6 ZERK	STAINLESS STEEL	N/A	1
2	SUC210-31	STAINLESS STEEL	N/A	1
1	SPA210	STAINLESS STEEL	N/A	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE BY REVISION DESCRIPTION				
ITEM DESCRIPTION: SUCSPA210-31				
				REV
				SCALE
				1:9
				REV
				-