


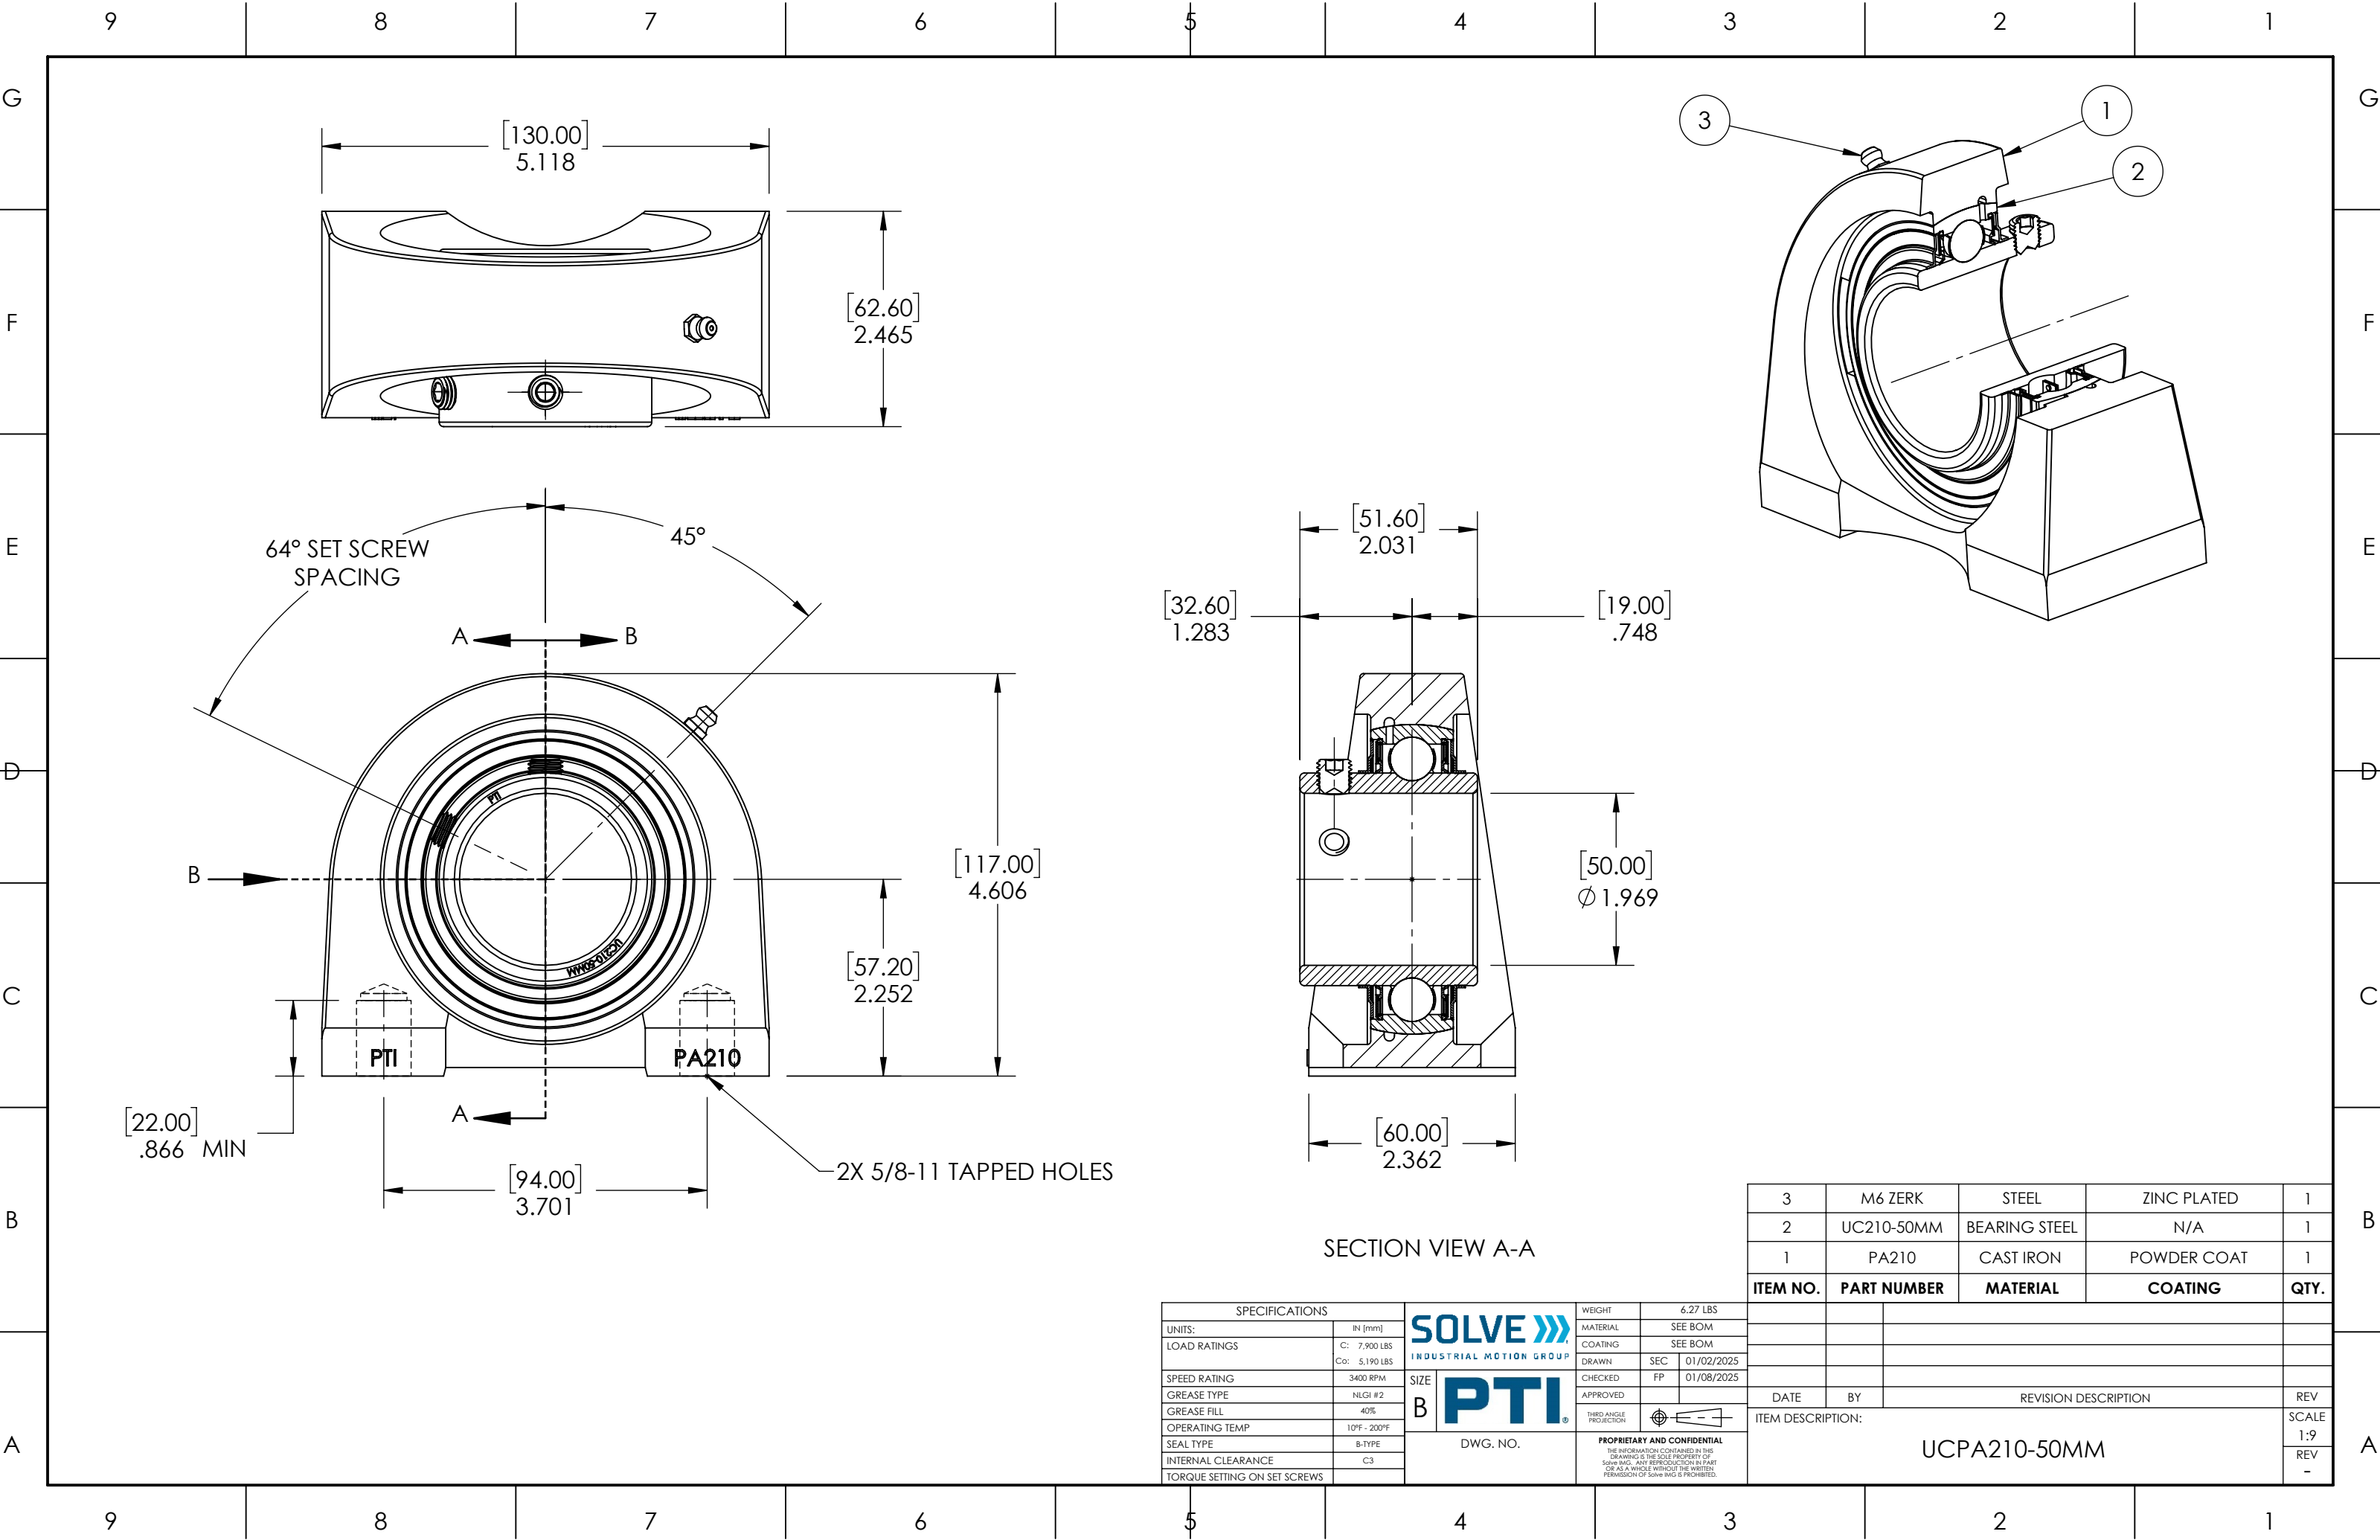

SECTION VIEW A-A

SPECIFICATIONS				WEIGHT		6.27 LBS	
UNITS:	IN [mm]			MATERIAL		SEE BOM	
LOAD RATINGS	C: 7,900 LBS Co: 5,190 LBS	SIZE B		COATING		SEE BOM	
SPEED RATING	3400 RPM			DRAWN	SEC	01/02/2025	
GREASE TYPE	NLGI #2			CHECKED	FP	01/08/2025	
GREASE FILL	40%			APPROVED			
OPERATING TEMP	10°F - 200°F			THIRD ANGLE PROJECTION			
SEAL TYPE	B-TYPE	DWG. NO.		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMG IS PROHIBITED.			
INTERNAL CLEARANCE	C3						
TORQUE SETTING ON SET SCREWS							

3	M6 ZERK	STEEL	ZINC PLATED	1
2	UC210-50MM	BEARING STEEL	N/A	1
1	PA210	CAST IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION: UCPA210-50MM				SCALE
				1:9
				REV -