


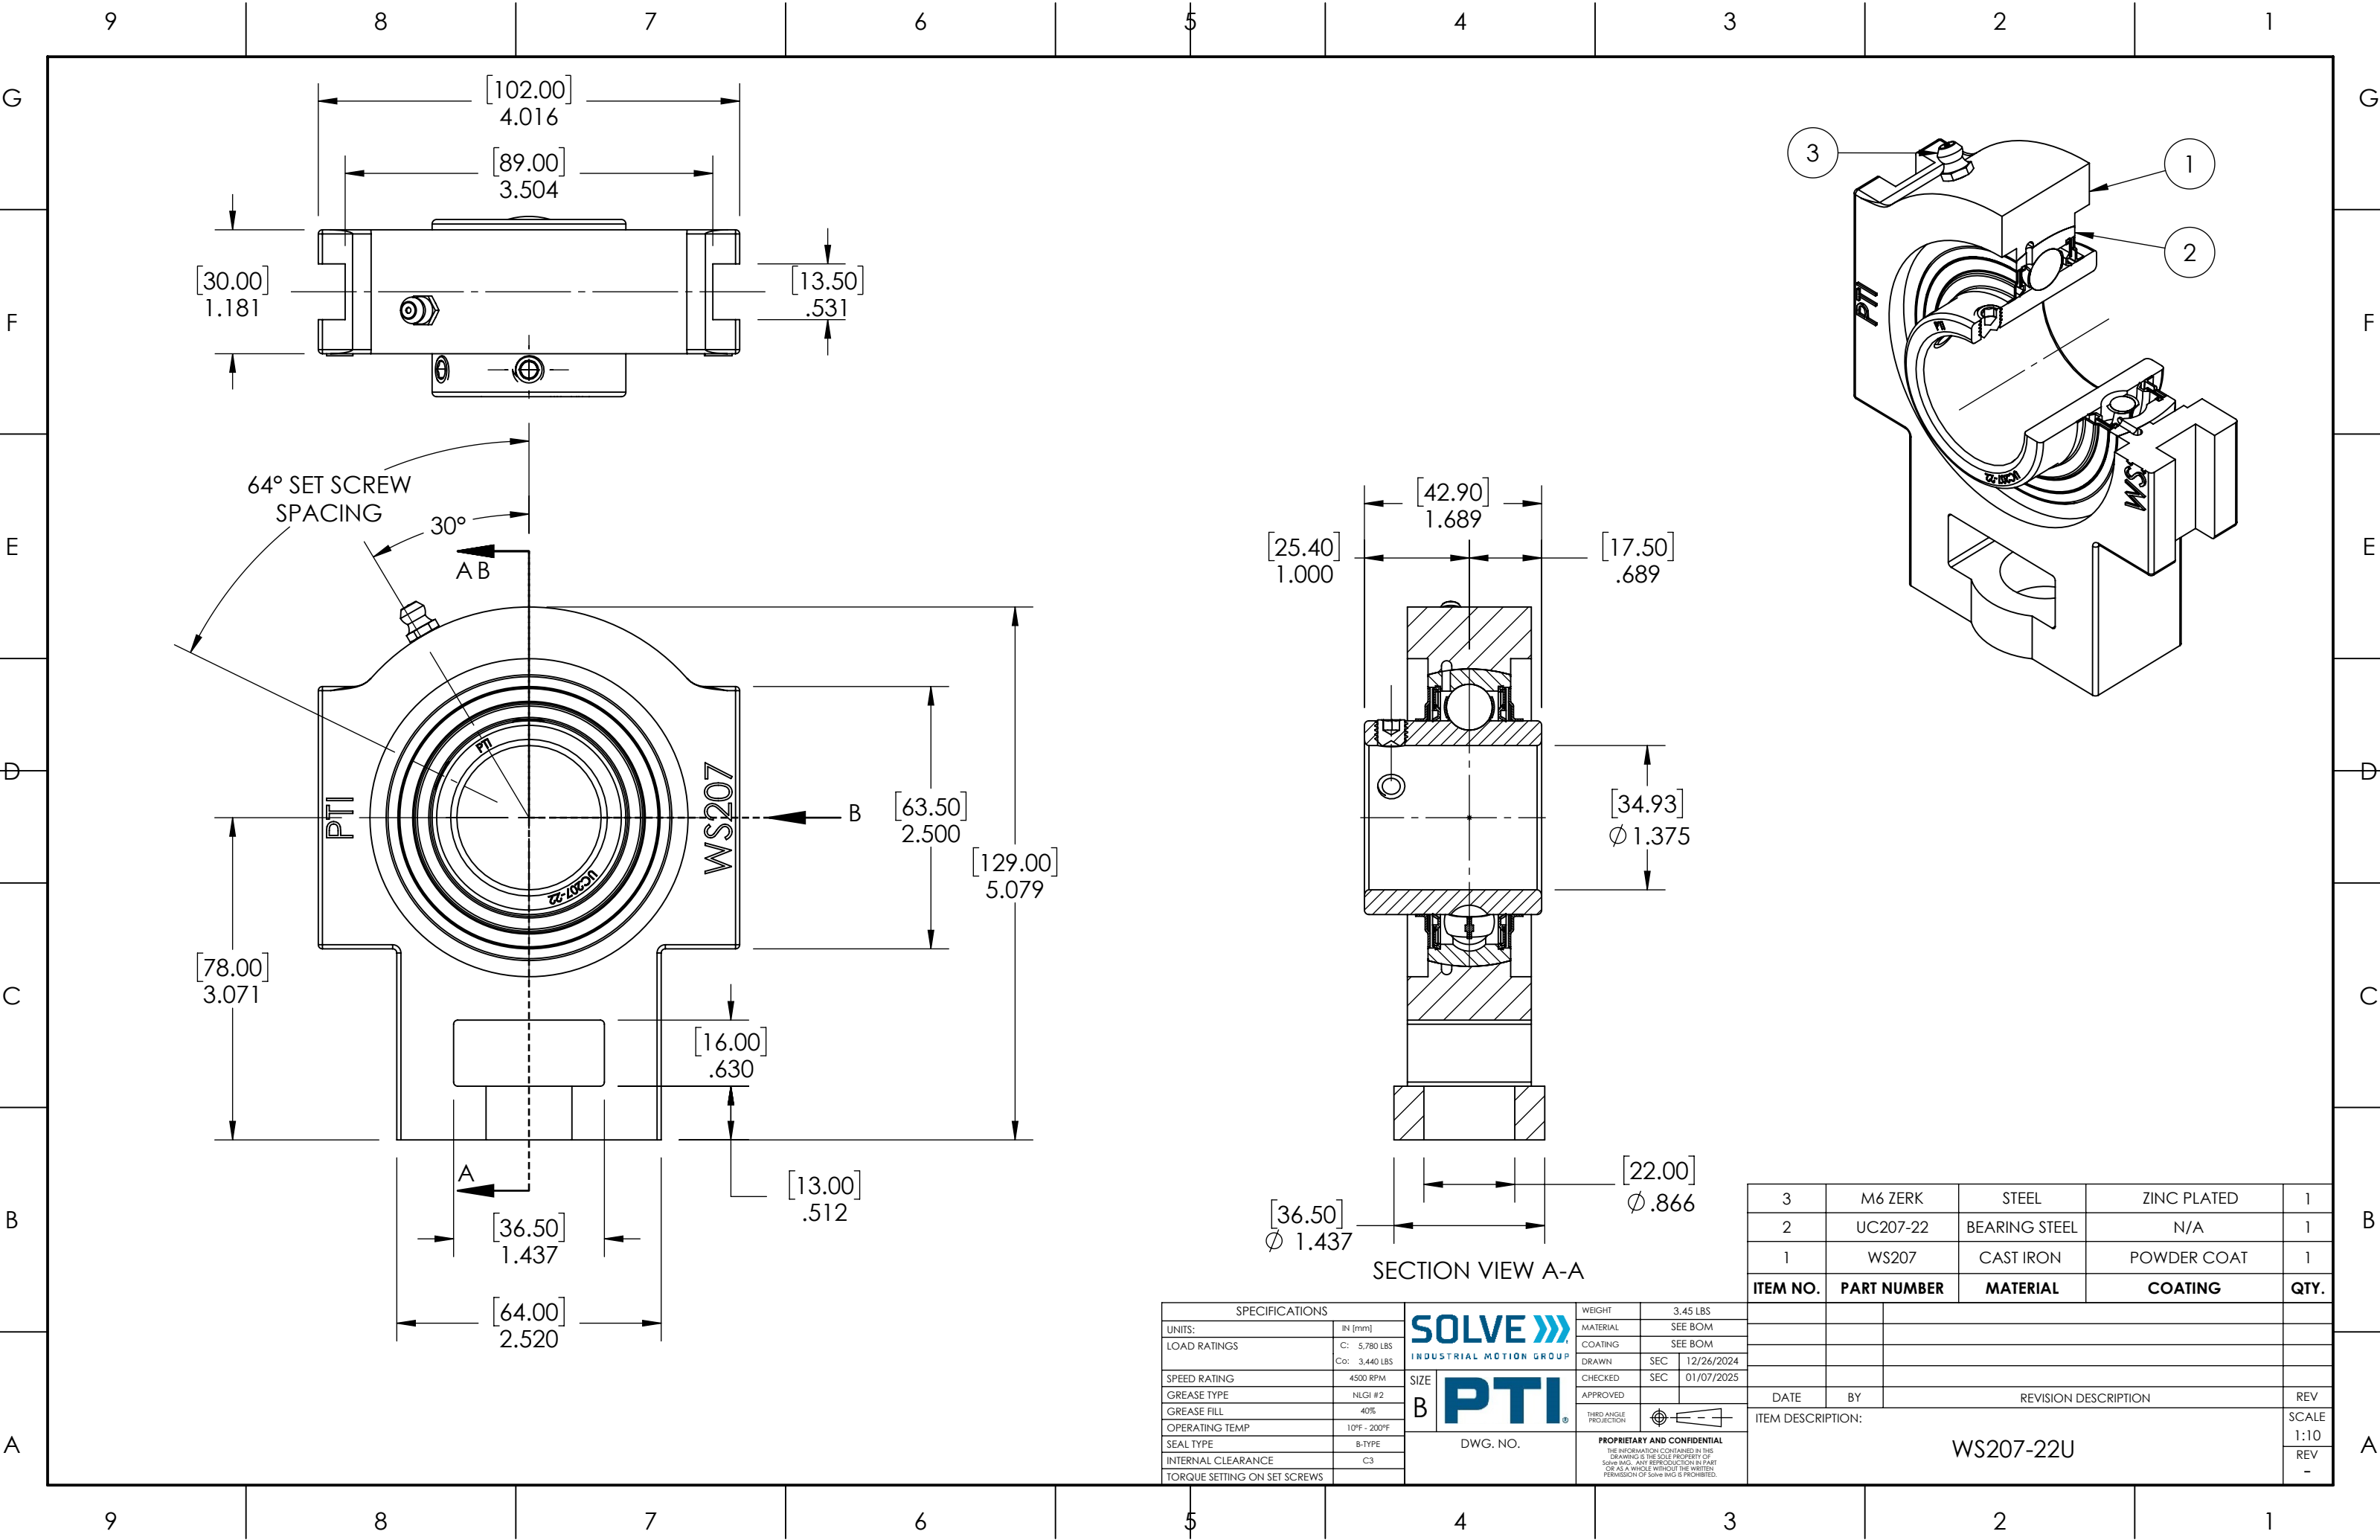

SPECIFICATIONS	
UNITS:	IN [mm]
LOAD RATINGS	C: 5,780 LBS
	Co: 3,440 LBS
SPEED RATING	4500 RPM
GREASE TYPE	NLGI #2
GREASE FILL	40%
OPERATING TEMP	10°F - 200°F
SEAL TYPE	B-TYPE
INTERNAL CLEARANCE	C3
TORQUE SETTING ON SET SCREWS	

SOLVE 

INDUSTRIAL MOTION GROUP

SIZE

PTI

DWG. NO.

WEIGHT	3.45 LBS
MATERIAL	SEE BOM
COATING	SEE BOM
DRAWN	SEC 12/26/2024
CHECKED	SEC 01/07/2025
APPROVED	
THIRD ANGLE PROJECTION	
PROPRIETARY AND CONFIDENTIAL	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	

3	M6 ZERK	STEEL	ZINC PLATED	1
2	UC207-22	BEARING STEEL	N/A	1
1	WS207	CAST IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION: WS207-22U				SCALE
				1:10
				REV -