

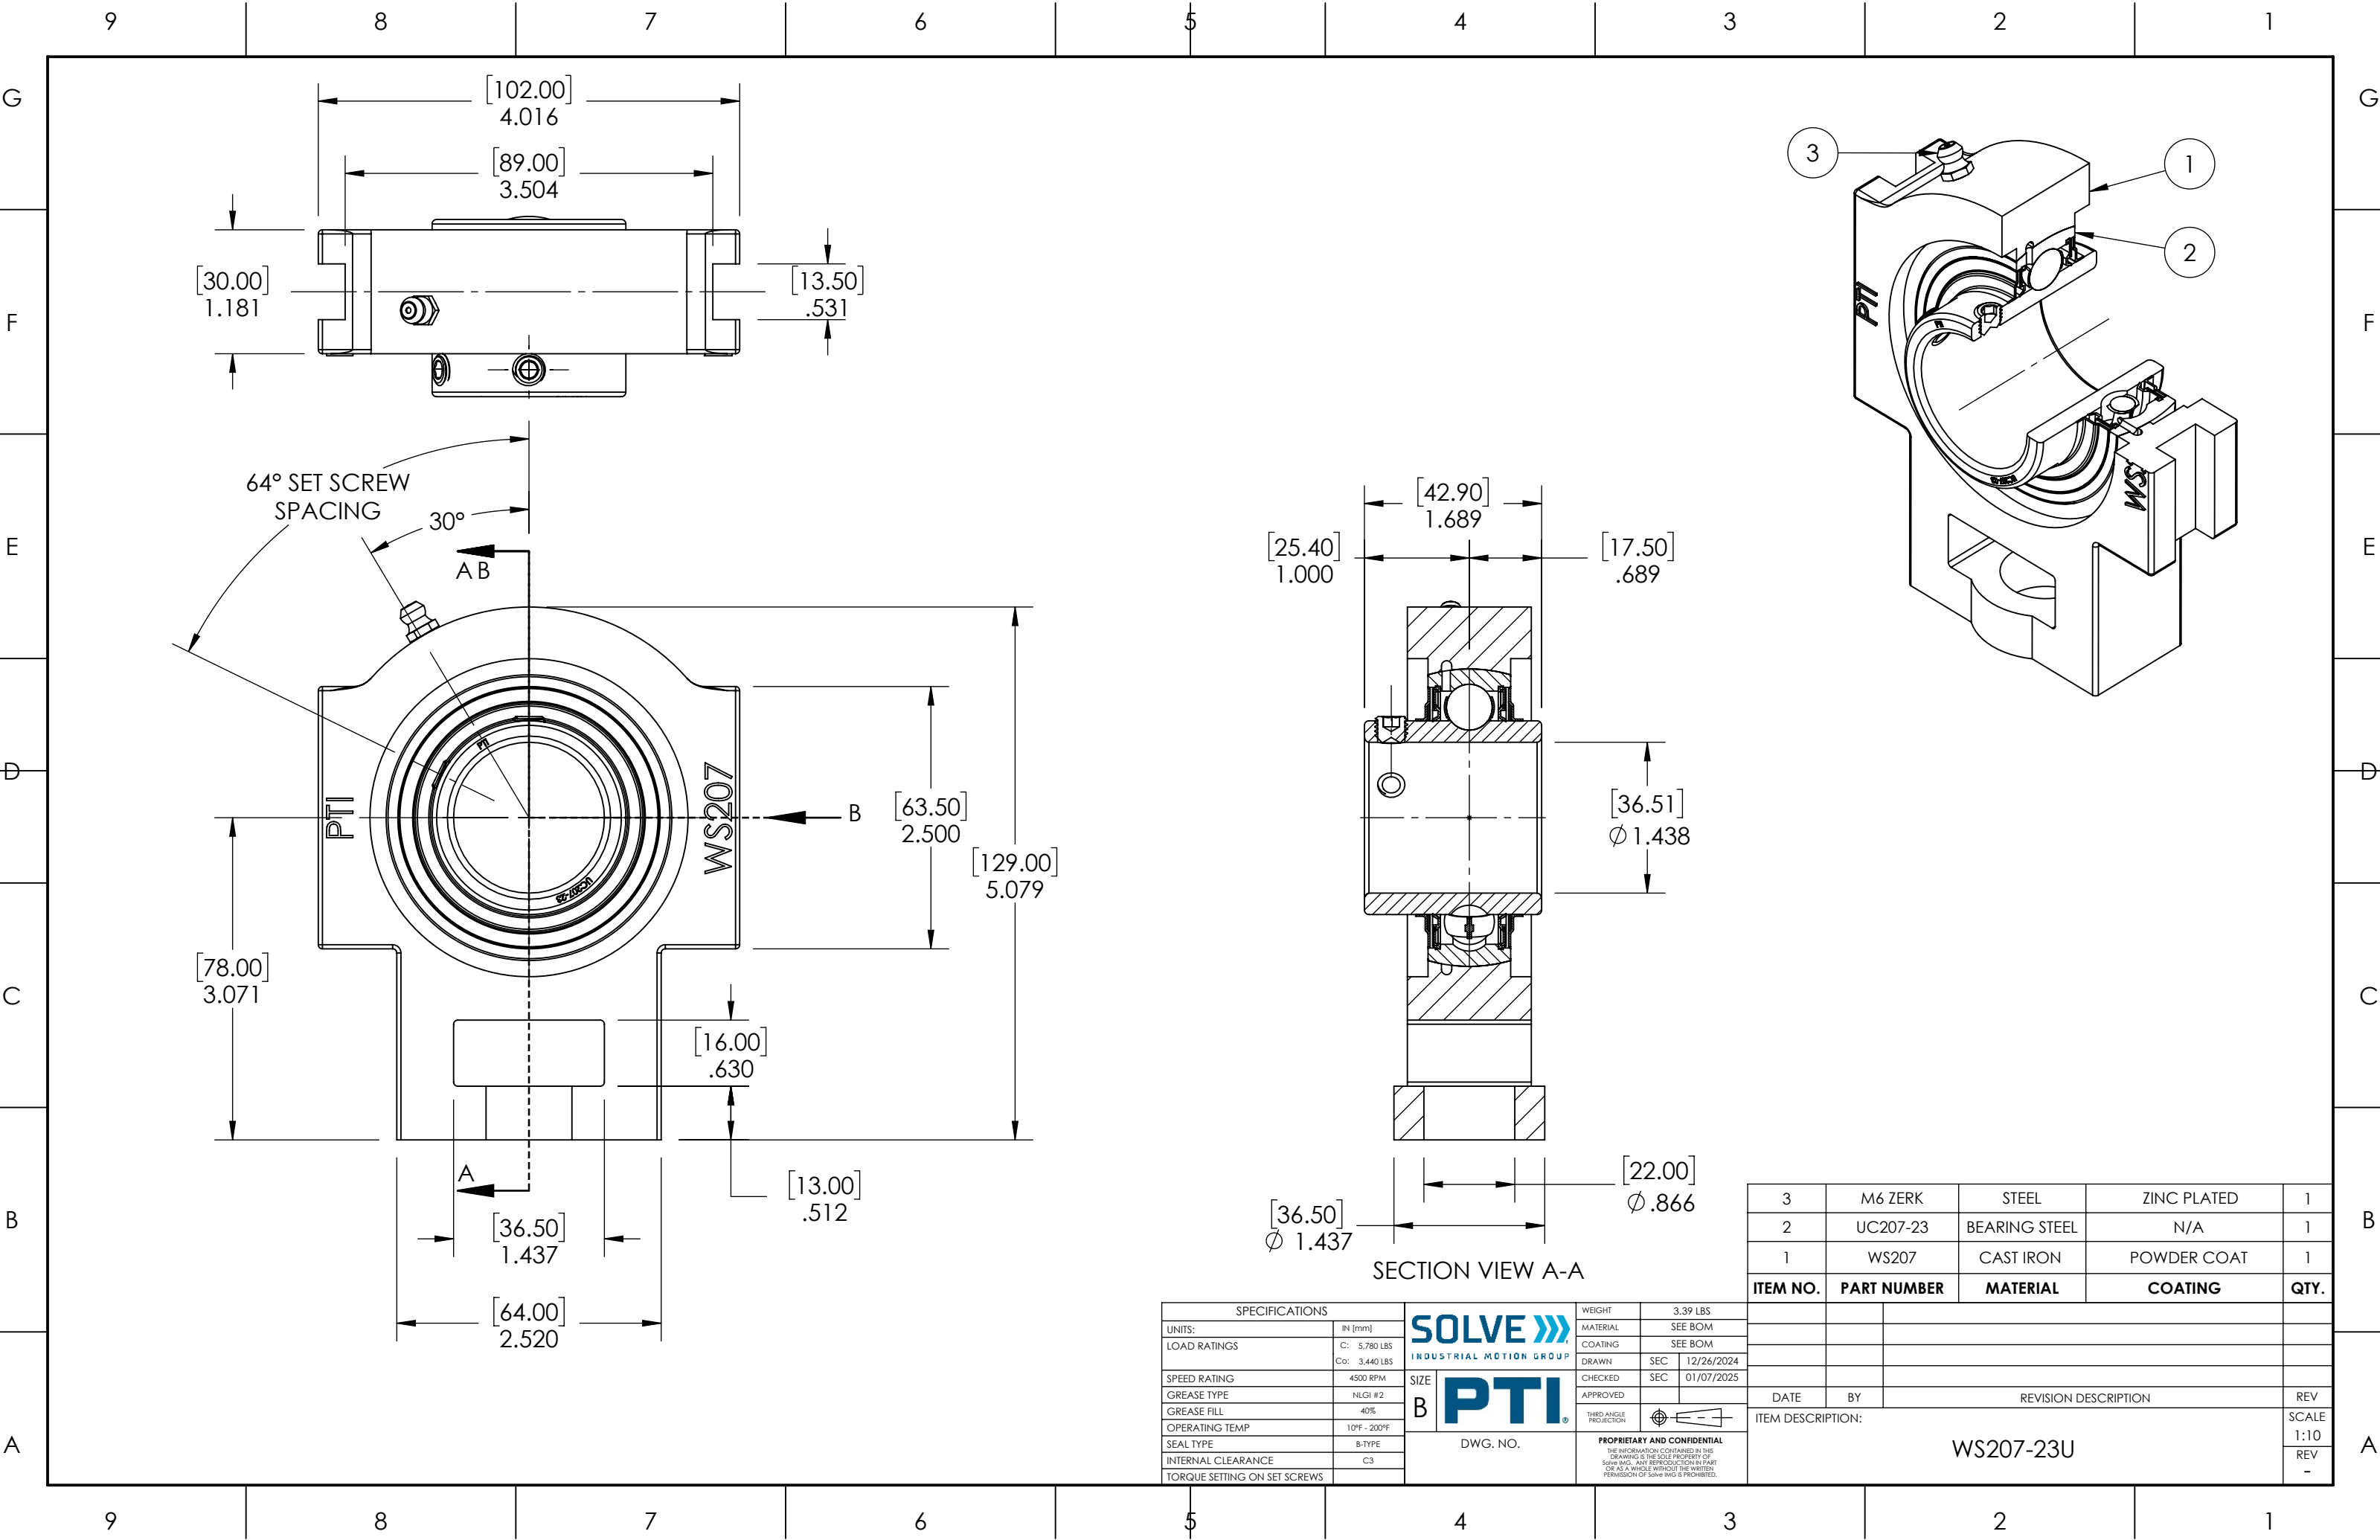
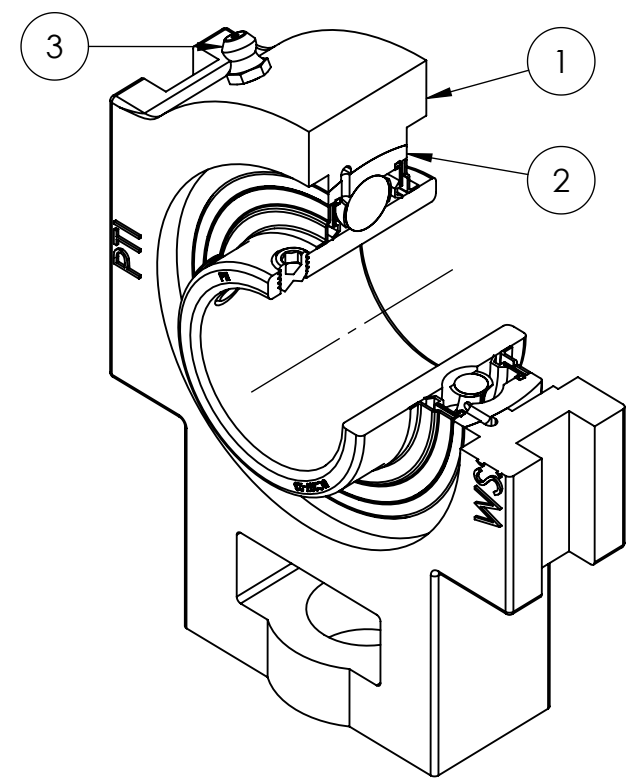


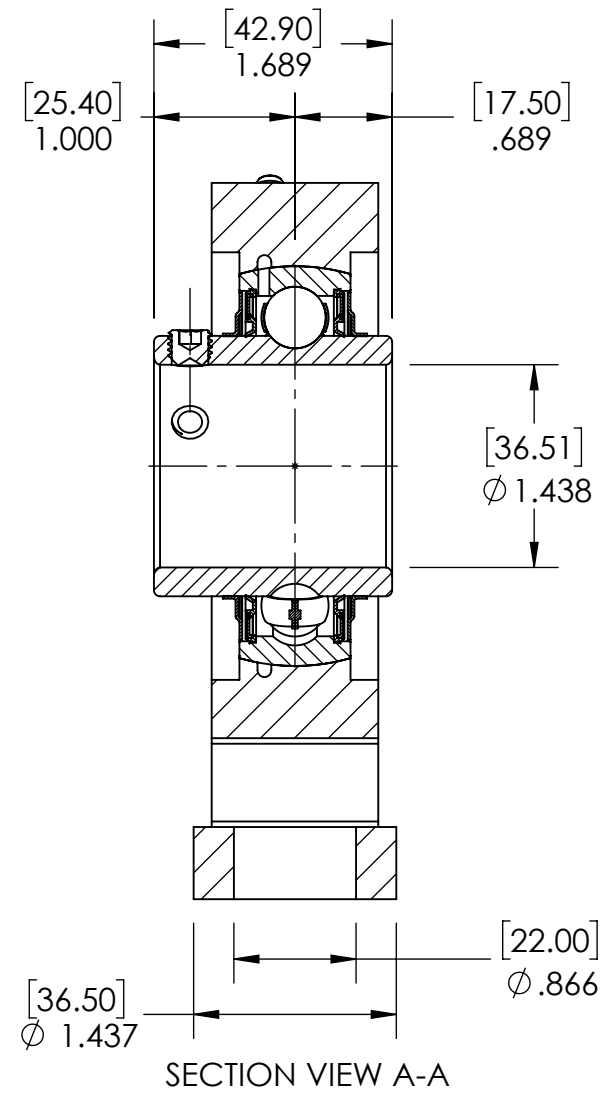

G
F
E
D
C
B
A

G
F
E
D
C
B
A



SPECIFICATIONS		SOLVE 		WEIGHT	
UNITS:	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C: 5,780 LBS Co: 3,440 LBS	SIZE		COATING	SEE BOM
SPEED RATING	4500 RPM	B 		DRAWN	SEC 12/26/2024
GREASE TYPE	NLGI #2	DWG. NO.		CHECKED	SEC 01/07/2025
GREASE FILL	40%	PROPRIETARY AND CONFIDENTIAL		APPROVED	
OPERATING TEMP	10°F - 200°F	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.			
SEAL TYPE	B-TYPE				
INTERNAL CLEARANCE	C3				
TORQUE SETTING ON SET SCREWS					

3	M6 ZERK	STEEL	ZINC PLATED	1
2	UC207-23	BEARING STEEL	N/A	1
1	WS207	CAST IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION: WS207-23U				SCALE
				1:10
				REV
				-