


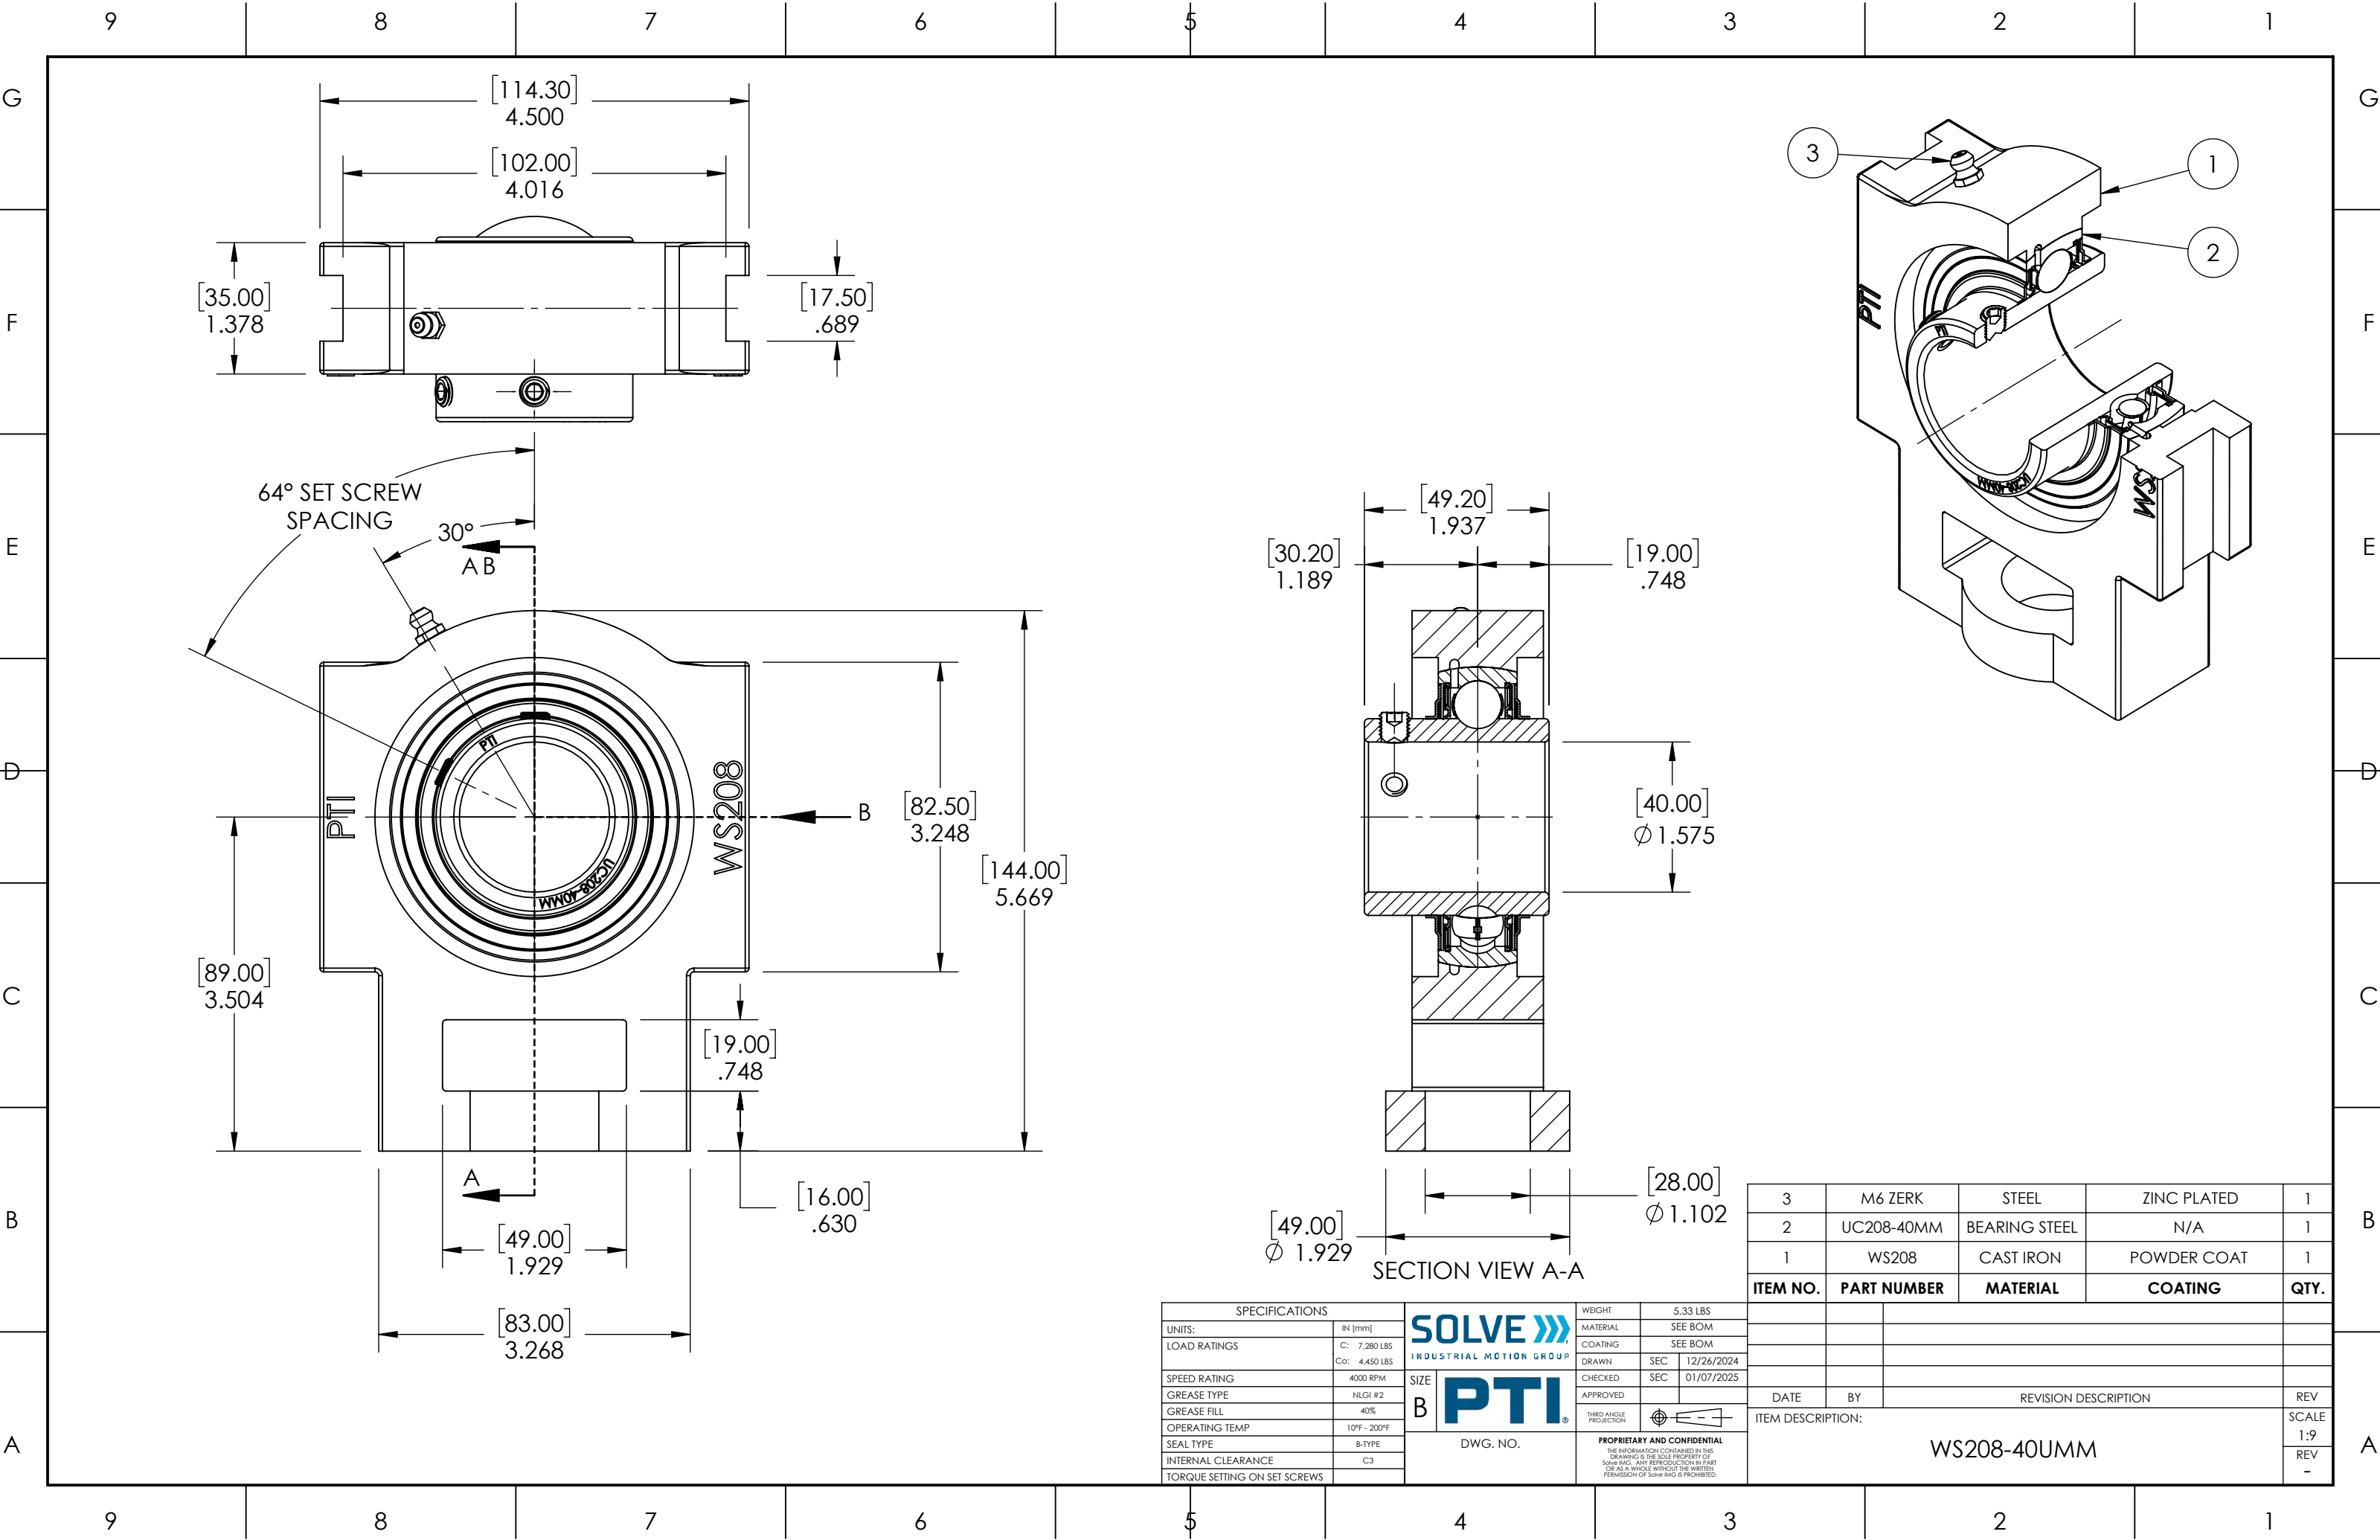

64° SET SCREW
SPACING

30°
A B

PTI

WS208

WS208-40UMM

SECTION VIEW A-A

3	M6 ZERK	STEEL	ZINC PLATED	1
2	UC208-40MM	BEARING STEEL	N/A	1
1	WS208	CAST IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		WEIGHT	
UNITS:	IN [mm]		5.33 LBS
LOAD RATINGS	C: 7,280 LBS Co: 4,450 LBS	MATERIAL	SEE BOM
		COATING	SEE BOM
SPEED RATING	4000 RPM	DRAWN	SEC 12/26/2024
GREASE TYPE	NLGI #2	CHECKED	SEC 01/07/2025
GREASE FILL	40%	APPROVED	
OPERATING TEMP	10°F - 200°F	THIRD ANGLE PROJECTION	
SEAL TYPE	B-TYPE	DWG. NO.	
INTERNAL CLEARANCE	C3		
TORQUE SETTING ON SET SCREWS			
		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	