


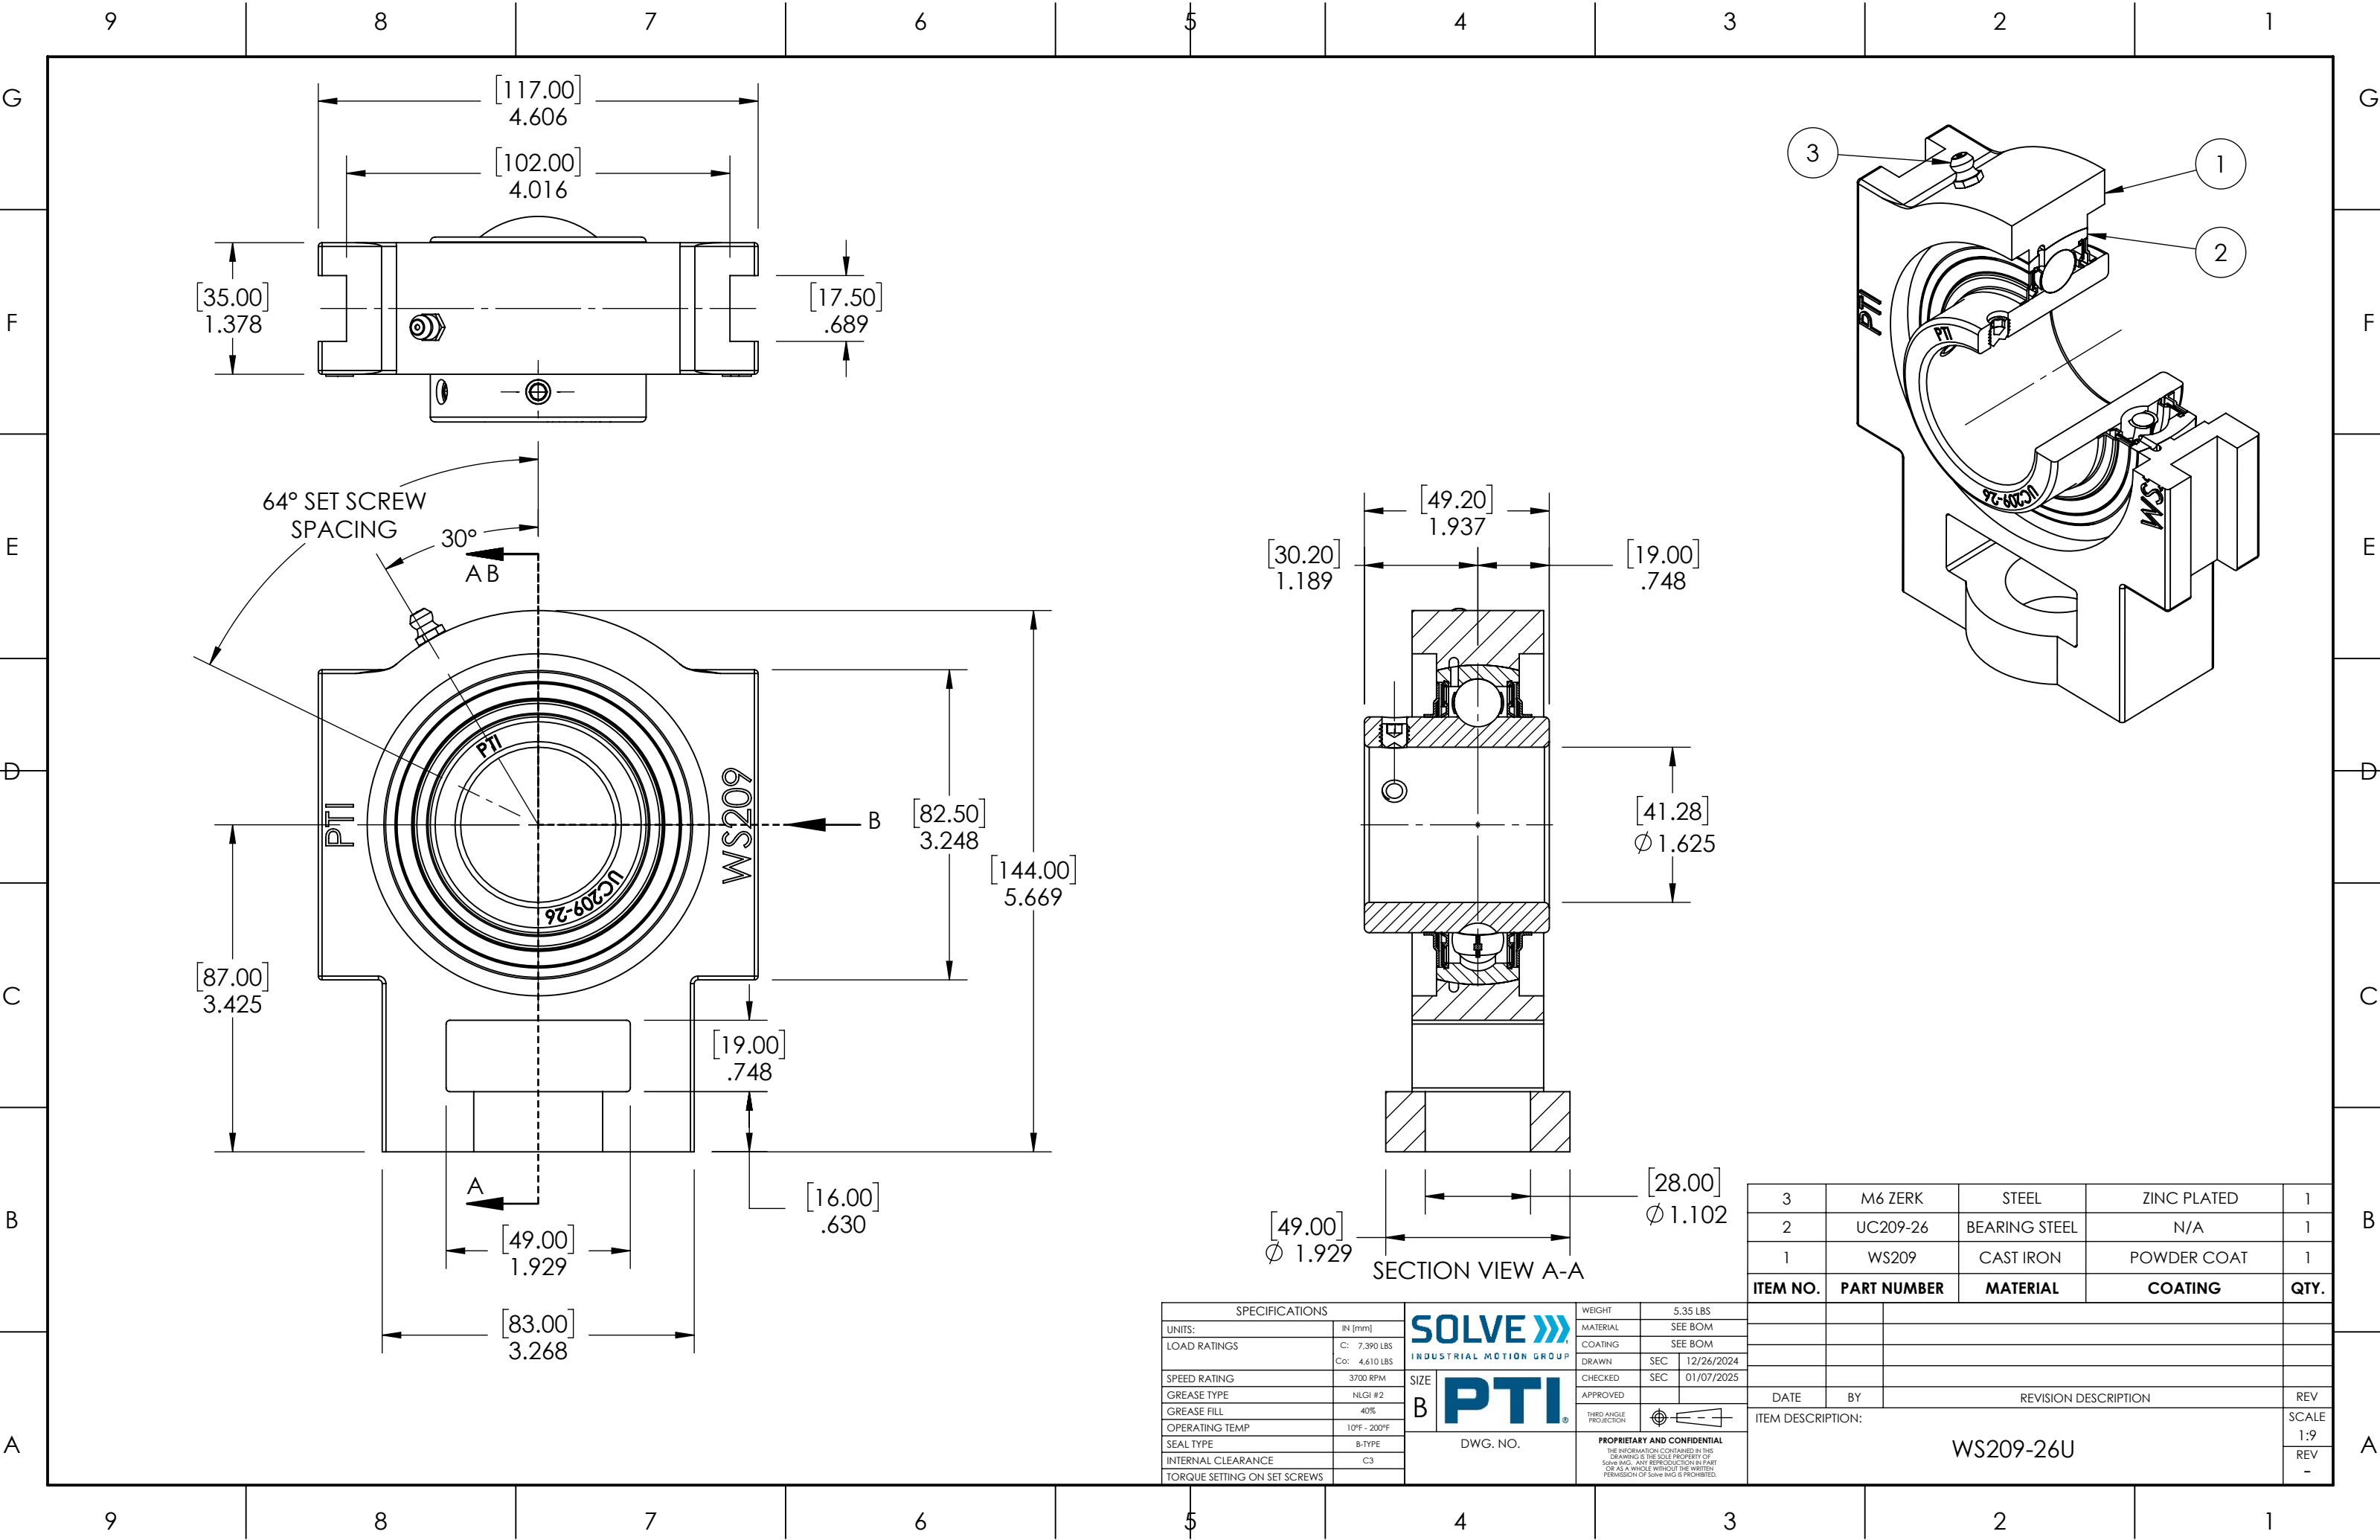

SPECIFICATIONS	
UNITS:	IN [mm]
LOAD RATINGS	C: 7,390 LBS Co: 4,610 LBS
SPEED RATING	3700 RPM
GREASE TYPE	NLGI #2
GREASE FILL	40%
OPERATING TEMP	10°F - 200°F
SEAL TYPE	B-TYPE
INTERNAL CLEARANCE	C3
TORQUE SETTING ON SET SCREWS	

SOLVE >>>
INDUSTRIAL MOTION GROUP

PTI

SIZE

B

DWG. NO.

WEIGHT	5.35 LBS
MATERIAL	SEE BOM
COATING	SEE BOM
DRAWN	SEC 12/26/2024
CHECKED	SEC 01/07/2025
APPROVED	
THIRD ANGLE PROJECTION	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	

3	M6 ZERK	STEEL	ZINC PLATED	1
2	UC209-26	BEARING STEEL	N/A	1
1	WS209	CAST IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION: WS209-26U				SCALE
				1:9
				REV -