
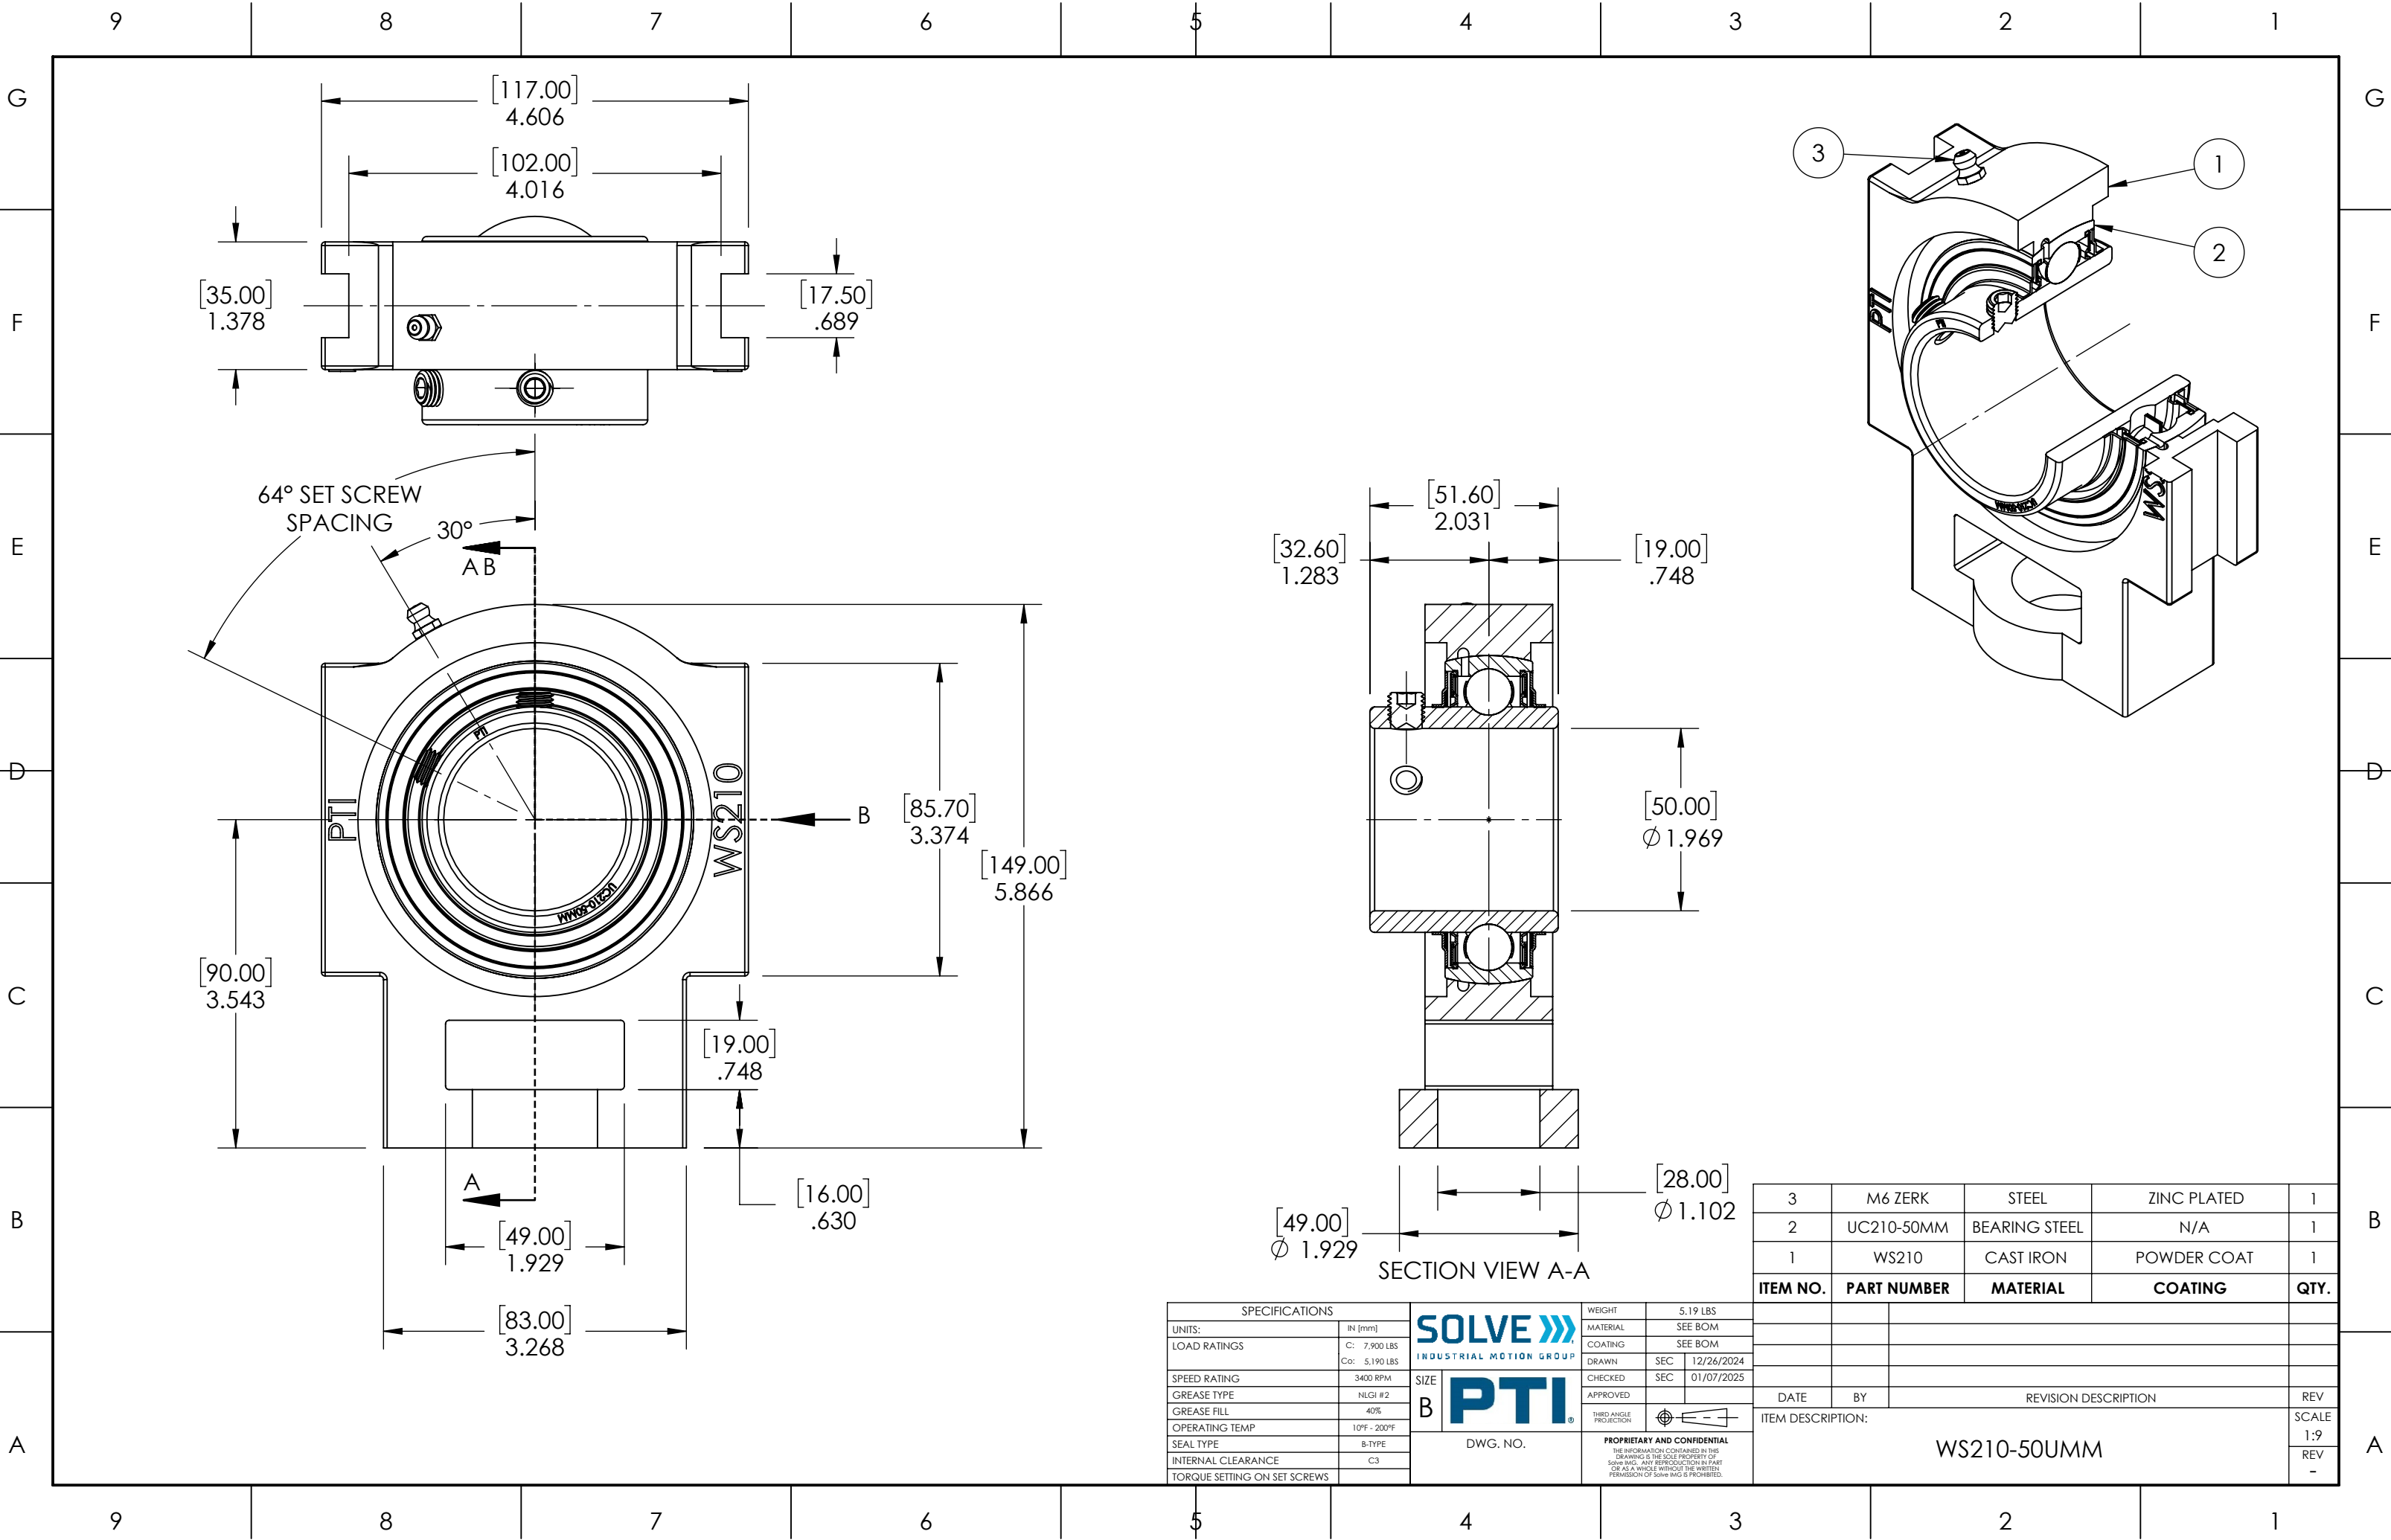




64° SET SCREW
SPACING

30°
A B

SECTION VIEW A-A

SPECIFICATIONS		SOLVE  INDUSTRIAL MOTION GROUP		WEIGHT		5.19 LBS		
UNITS:	IN [mm]			MATERIAL		SEE BOM		
LOAD RATINGS	C: 7,900 LBS	SIZE	B PTI 	COATING		SEE BOM		
	Co: 5,190 LBS			DRAWN	SEC	12/26/2024		
SPEED RATING	3400 RPM	B	DWG. NO. PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMG IS PROHIBITED.	CHECKED	SEC	01/07/2025		
GREASE TYPE	NLGI #2			APPROVED				
GREASE FILL	40%			THIRD ANGLE PROJECTION				
OPERATING TEMP	10°F - 200°F							
SEAL TYPE	B-TYPE							
INTERNAL CLEARANCE	C3							
TORQUE SETTING ON SET SCREWS								

3	M6 ZERK	STEEL	ZINC PLATED	1
2	UC210-50MM	BEARING STEEL	N/A	1
1	WS210	CAST IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE BY REVISION DESCRIPTION REV				
ITEM DESCRIPTION: WS210-50UMM SCALE 1:9				
REV -				