


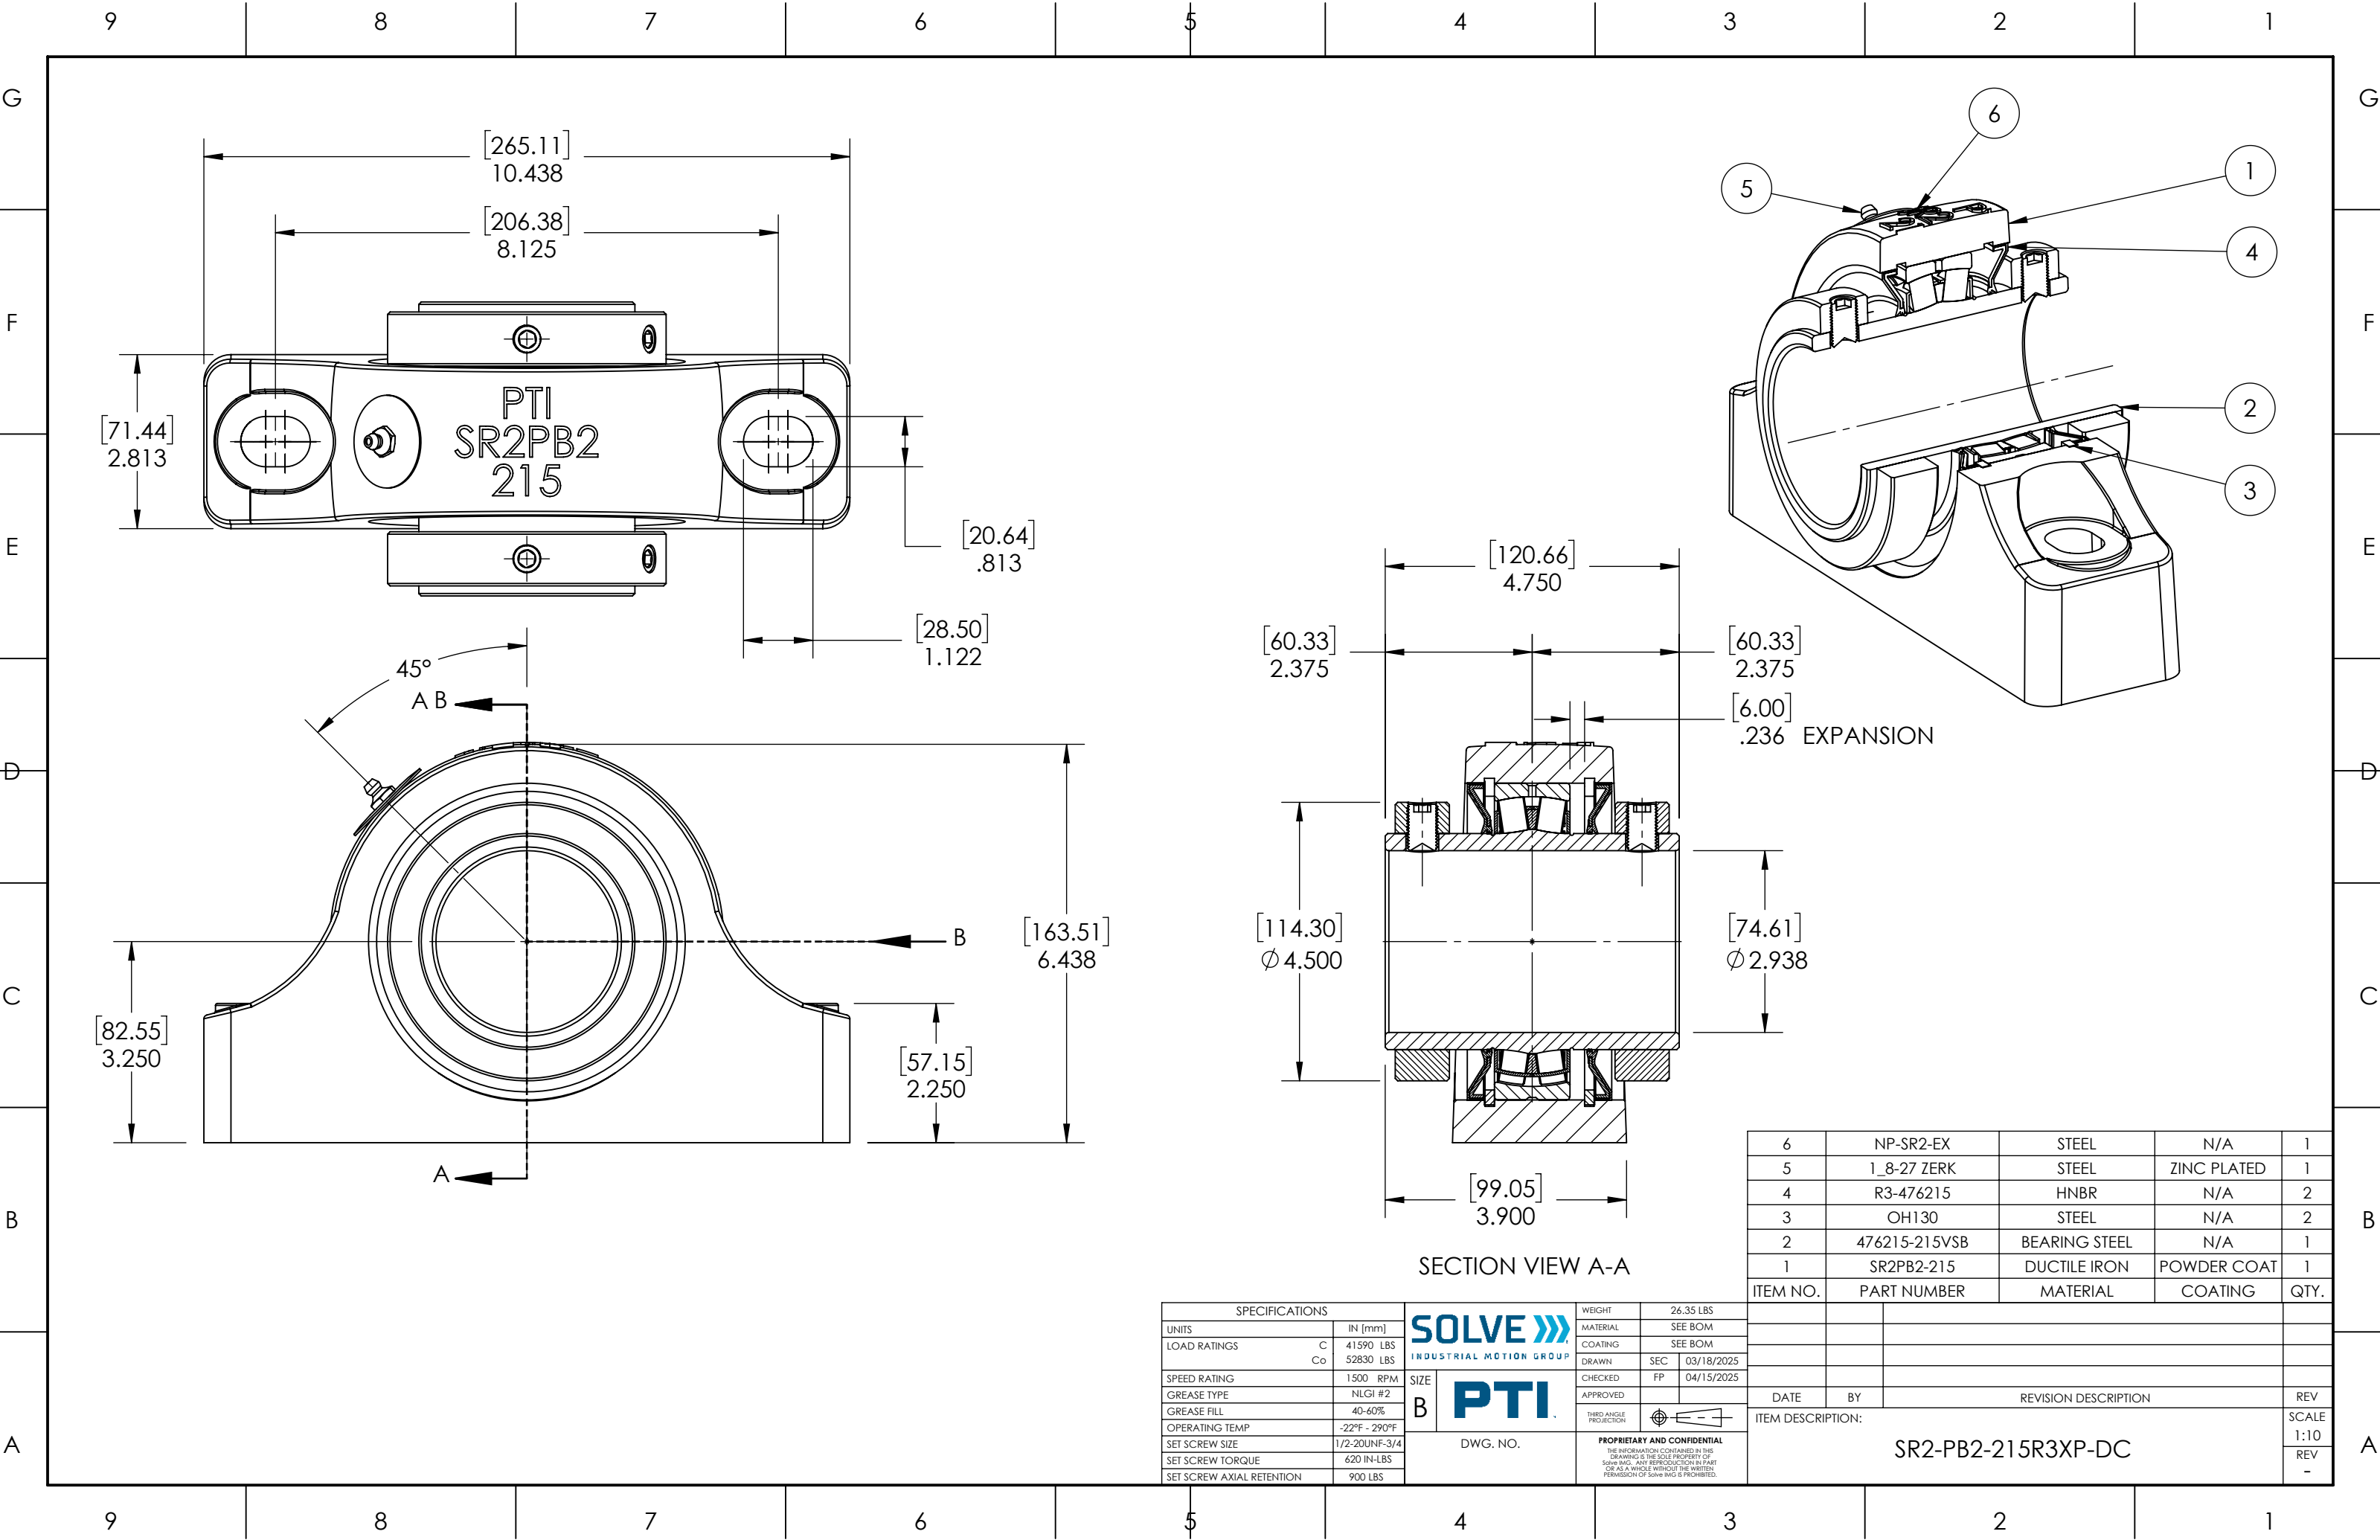

SECTION VIEW A-A

6	NP-SR2-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476215	HNBR	N/A	2
3	OH130	STEEL	N/A	2
2	476215-215VSB	BEARING STEEL	N/A	1
1	SR2PB2-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS			SOLVE INDUSTRIAL MOTION GROUP		WEIGHT		26.35 LBS	
UNITS		IN [mm]			MATERIAL	SEE BOM		
LOAD RATINGS	C	41590 LBS	SIZE B	PTI DWG. NO.	COATING	SEE BOM		
	Co	52830 LBS			DRAWN	SEC	03/18/2025	
SPEED RATING		1500 RPM			CHECKED	FP	04/15/2025	
GREASE TYPE		NLGI #2			APPROVED			
GREASE FILL		40-60%			THIRD ANGLE PROJECTION			
OPERATING TEMP		-22°F - 290°F			PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.			
SET SCREW SIZE		1/2-20UNF-3/4						
SET SCREW TORQUE		620 IN-LBS						
SET SCREW AXIAL RETENTION		900 LBS						

SOLVE 
INDUSTRIAL MOTION GROUP

PTI

DWG. NO.

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION: SR2-PB2-215R3XP-DC			SCALE 1:10
			REV -