


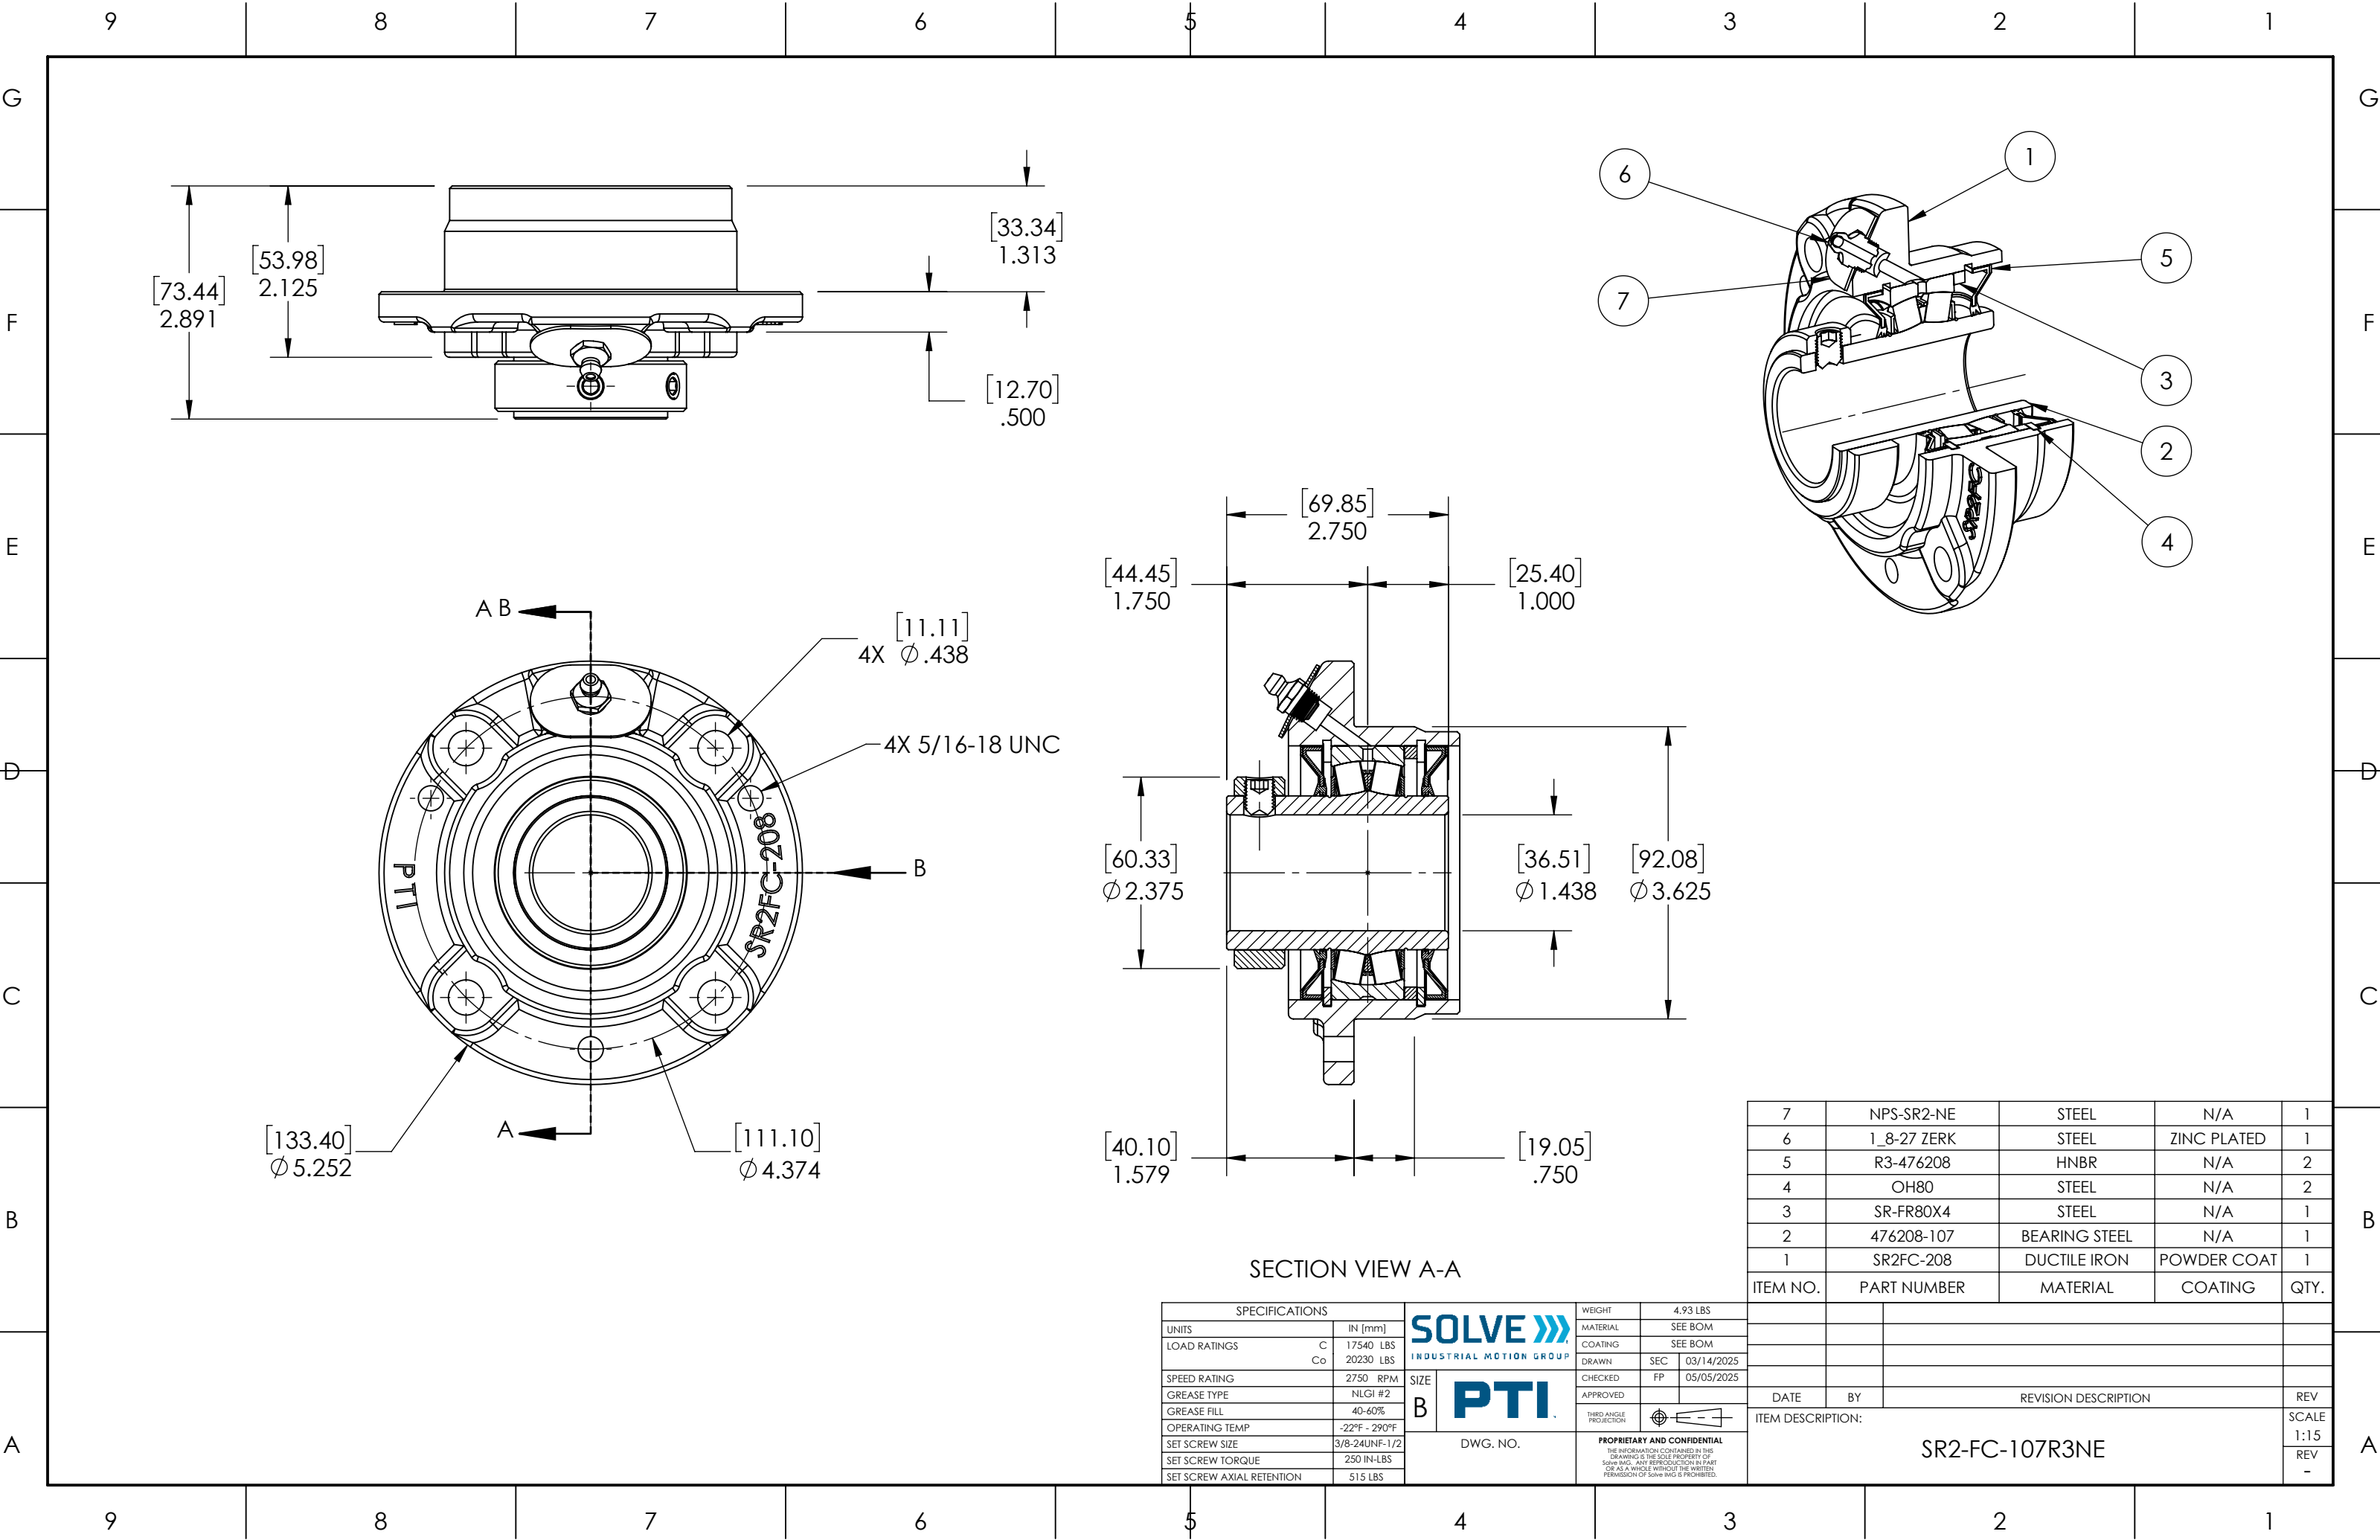

SECTION VIEW A-A

SPECIFICATIONS		SOLVE 		WEIGHT	4.93 LBS
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C 17540 LBS Co 20230 LBS			COATING	SEE BOM
SPEED RATING	2750 RPM	SIZE	B	DRAWN	SEC 03/14/2025
GREASE TYPE	NLGI #2	PTI		CHECKED	FP 05/05/2025
GREASE FILL	40-60%			APPROVED	
OPERATING TEMP	-22°F - 290°F	DWG. NO.		THIRD ANGLE PROJECTION	
SET SCREW SIZE	3/8-24UNF-1/2			PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW TORQUE	250 IN-LBS				
SET SCREW AXIAL RETENTION	515 LBS				

7	NPS-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476208	HNBR	N/A	2
4	OH80	STEEL	N/A	2
3	SR-FR80X4	STEEL	N/A	1
2	476208-107	BEARING STEEL	N/A	1
1	SR2FC-208	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SR2-FC-107R3NE			1:15
			REV
			-