
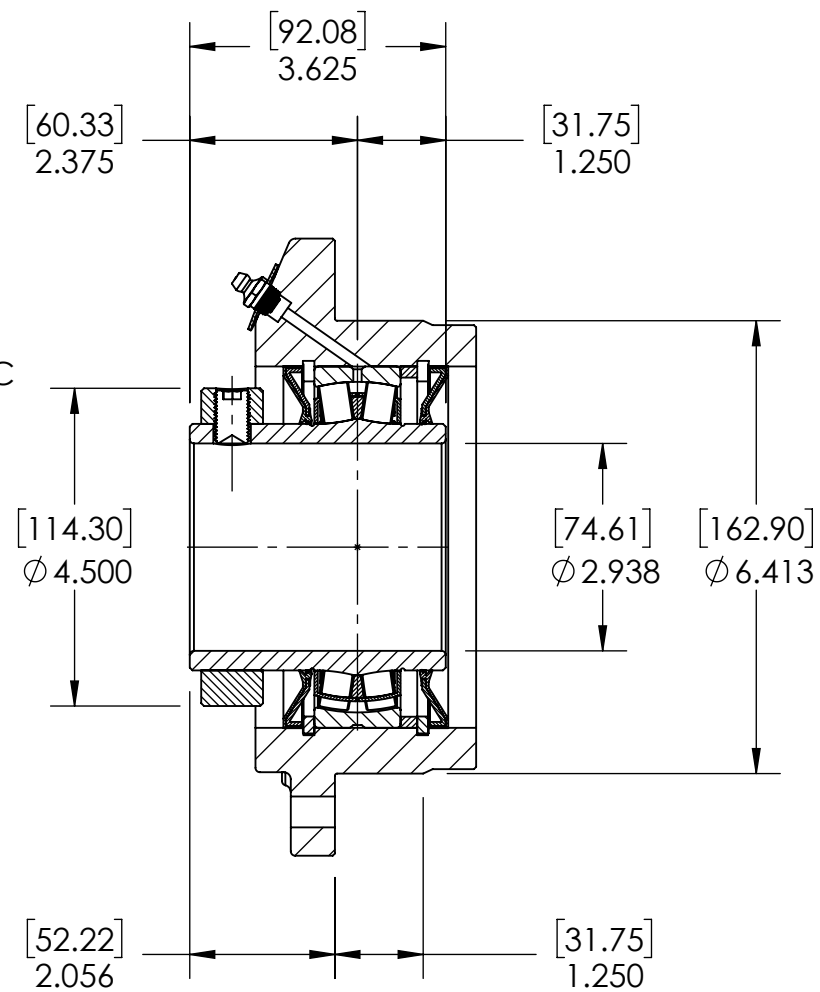
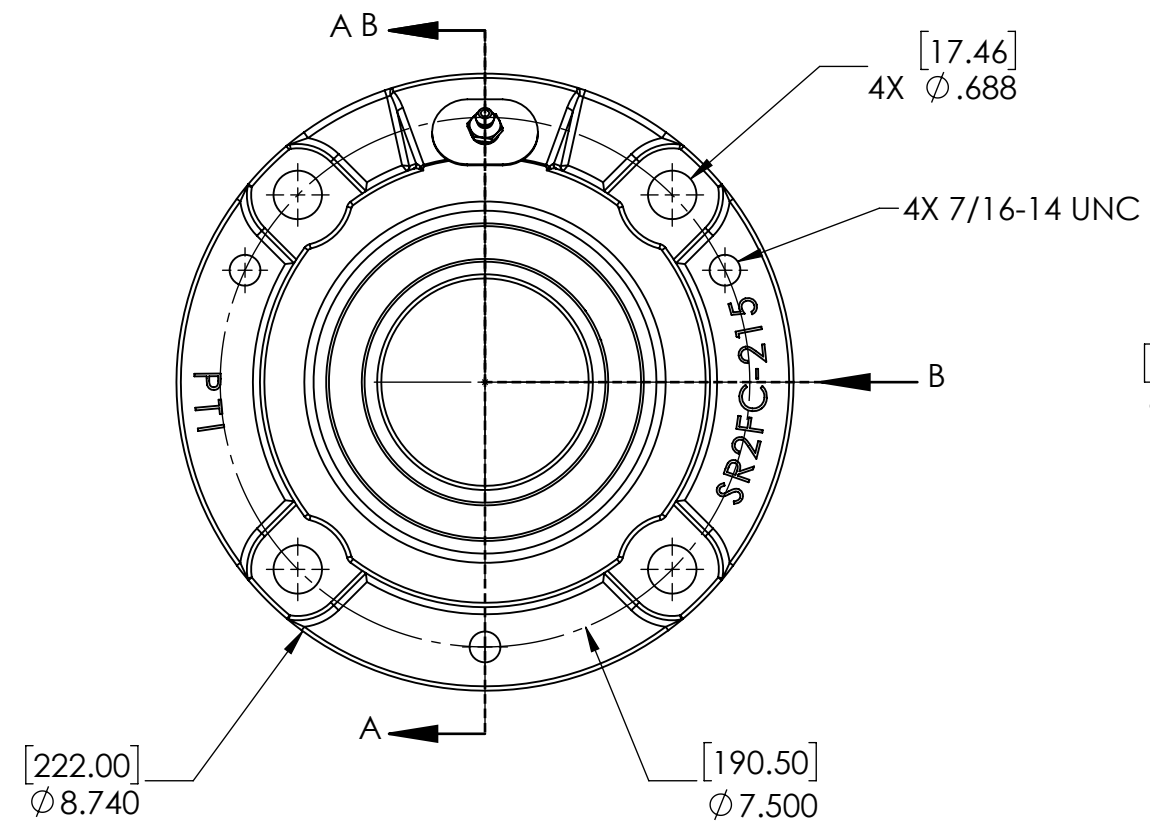
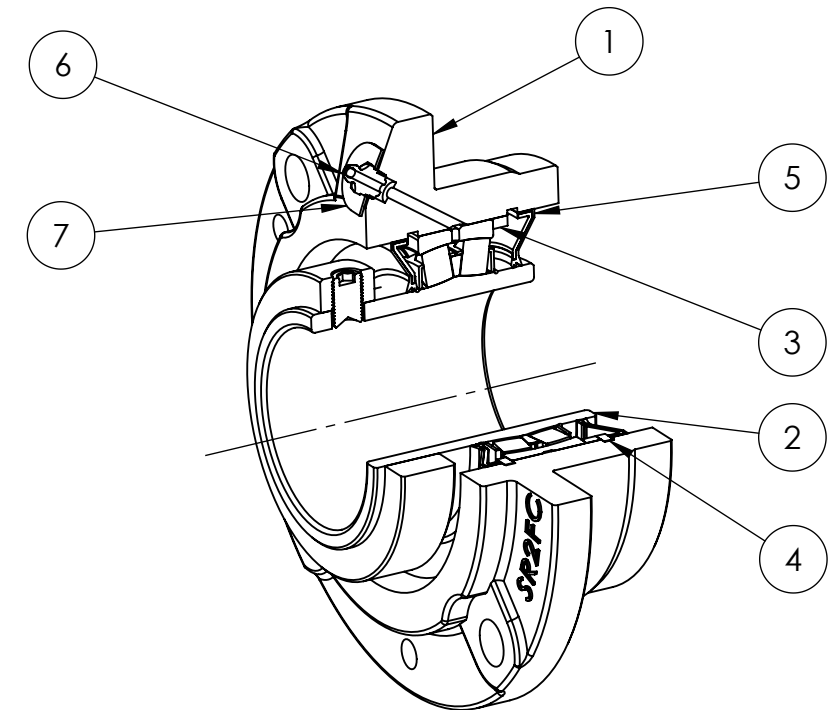


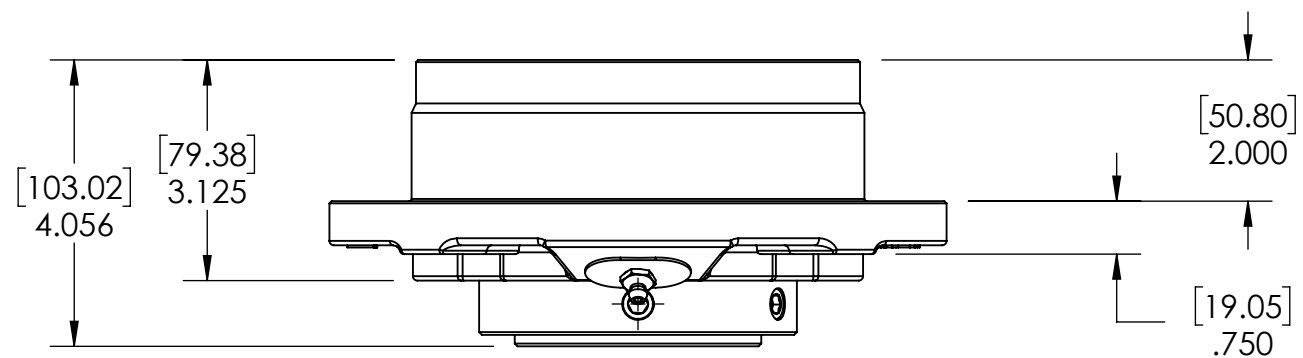

SECTION VIEW A-A

SPECIFICATIONS			SOLVE INDUSTRIAL MOTION GROUP		WEIGHT		21.59 LBS		
UNITS		IN [mm]			MATERIAL		SEE BOM		
LOAD RATINGS		C	41590 LBS		COATING		SEE BOM		
		Co	52830 LBS						
SPEED RATING		1500 RPM		SIZE B	PTI	DRAWN		SEC 03/14/2025	
GREASE TYPE		NLGI #2				CHECKED		FP 05/05/2025	
GREASE FILL		40-60%				APPROVED			
OPERATING TEMP		-22°F - 290°F				THIRD ANGLE PROJECTION			
SET SCREW SIZE		1/2-20UNF-3/4							
SET SCREW TORQUE		620 IN-LBS		DWG. NO.		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMAG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMAG IS PROHIBITED.			
SET SCREW AXIAL RETENTION		900 LBS							

7	NPS-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476215	HNBR	N/A	2
4	OH130	STEEL	N/A	2
3	SR-FR130X6	STEEL	N/A	1
2	476215-215	BEARING STEEL	N/A	1
1	SR2FC-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

25				
25				
	DATE	BY	REVISION DESCRIPTION	
-	ITEM DESCRIPTION:			REV
	SR2-FC-215R3NE			SCALE 1:10
				REV -