
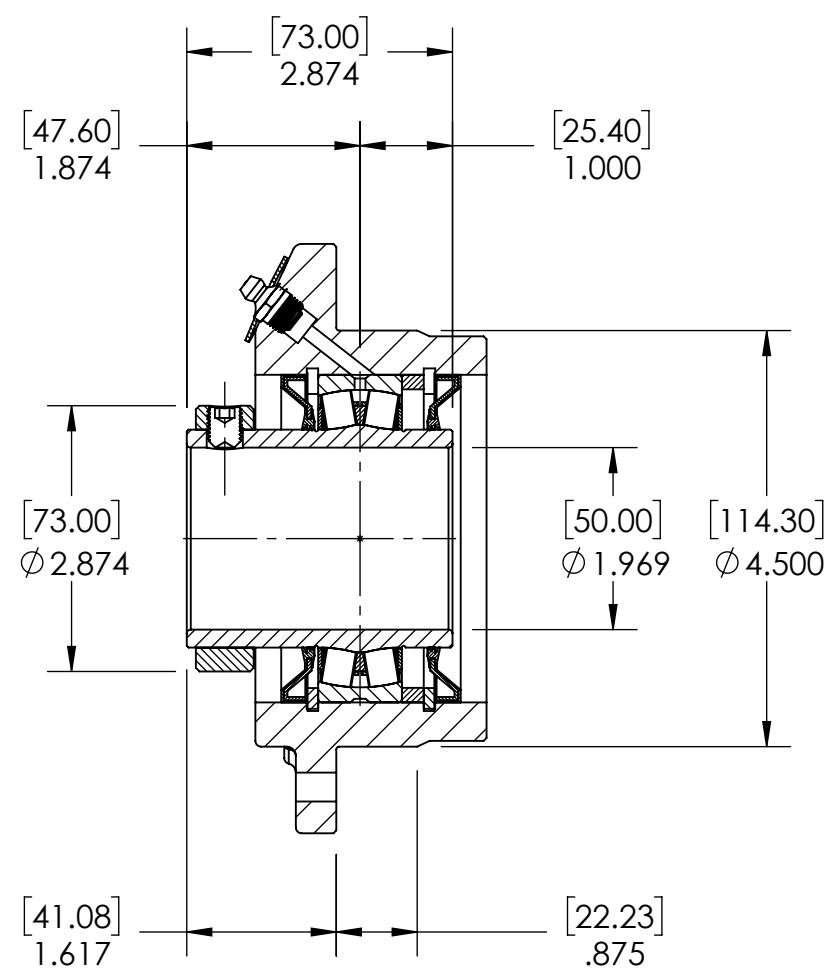
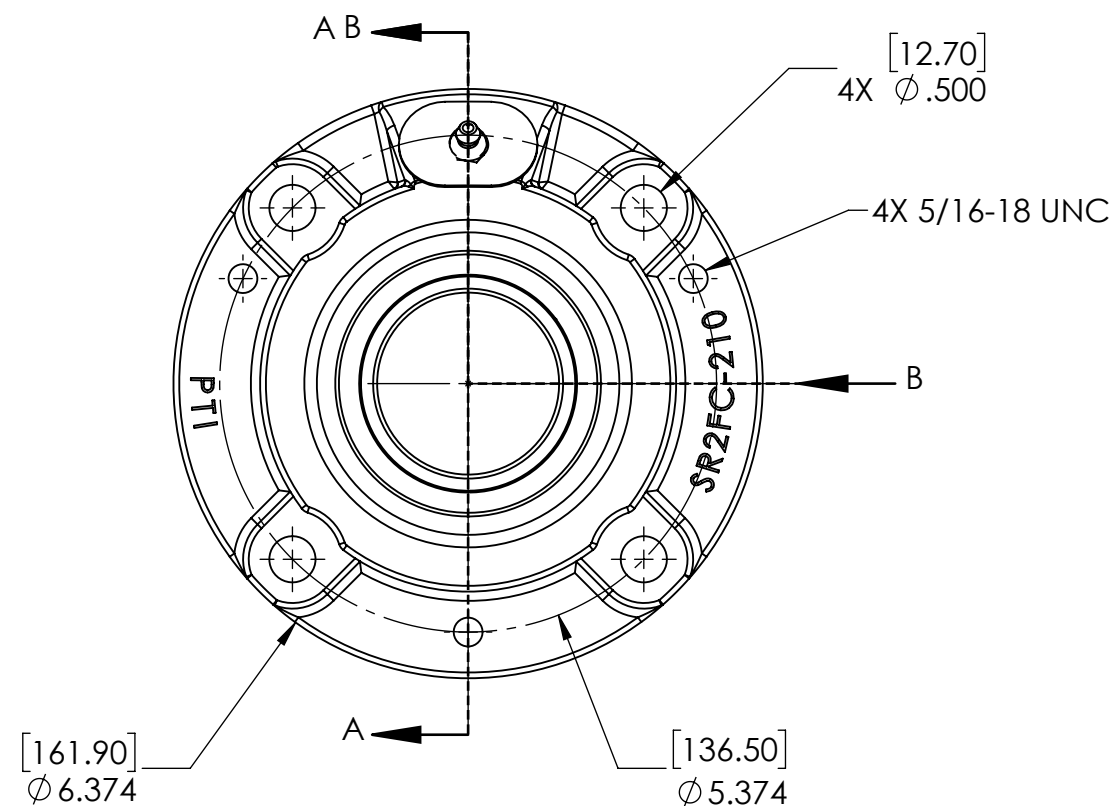
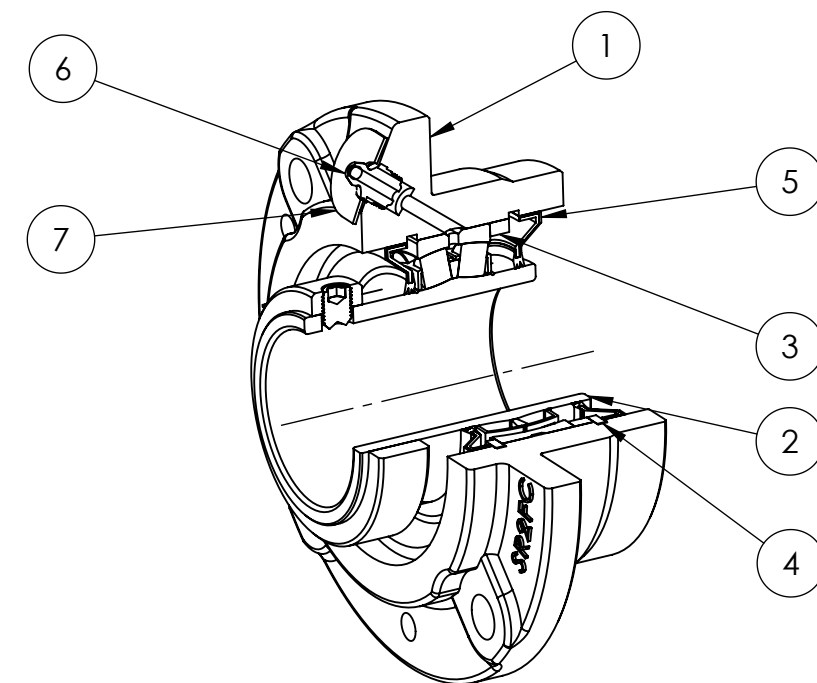


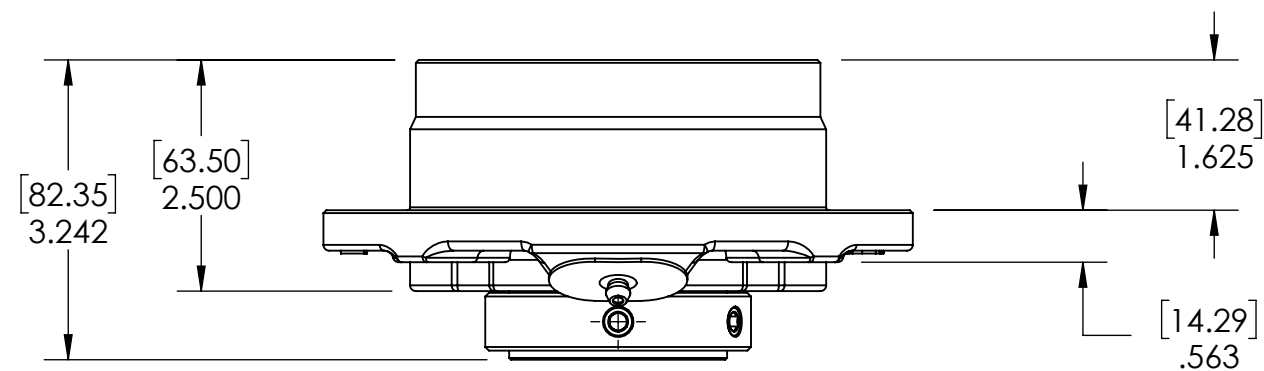

SECTION VIEW A-A

SPECIFICATIONS		SOLVE  INDUSTRIAL MOTION GROUP		WEIGHT		8.47 LBS		
UNITS	IN [mm]			MATERIAL		SEE BOM		
LOAD RATINGS	C	20230 LBS		COATING		SEE BOM		
	Co	24730 LBS		DRAWN		SEC	03/14/20	
SPEED RATING	2225 RPM		SIZE	B		CHECKED	FP	05/05/20
GREASE TYPE	NLGI #2					APPROVED		
GREASE FILL	40-60%					THIRD ANGLE PROJECTION		
OPERATING TEMP	-22°F - 290°F					DWG. NO. PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMG IS PROHIBITED.		
SET SCREW SIZE	3/8-24UNF-1/2							
SET SCREW TORQUE	250 IN-LBS							
SET SCREW AXIAL RETENTION	515 LBS							

7	NPS-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476210	HNBR	N/A	2
4	OH90	STEEL	N/A	2
3	SR-FR90X6	STEEL	N/A	1
2	476210-50MM	BEARING STEEL	N/A	1
1	SR2FC-210	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

25			
25			
	DATE	BY	REVISION DESCRIPTION
-	ITEM DESCRIPTION:		
	SR2-FC-50MMR3NE		
	SCALE 1:13		
	REV -		