
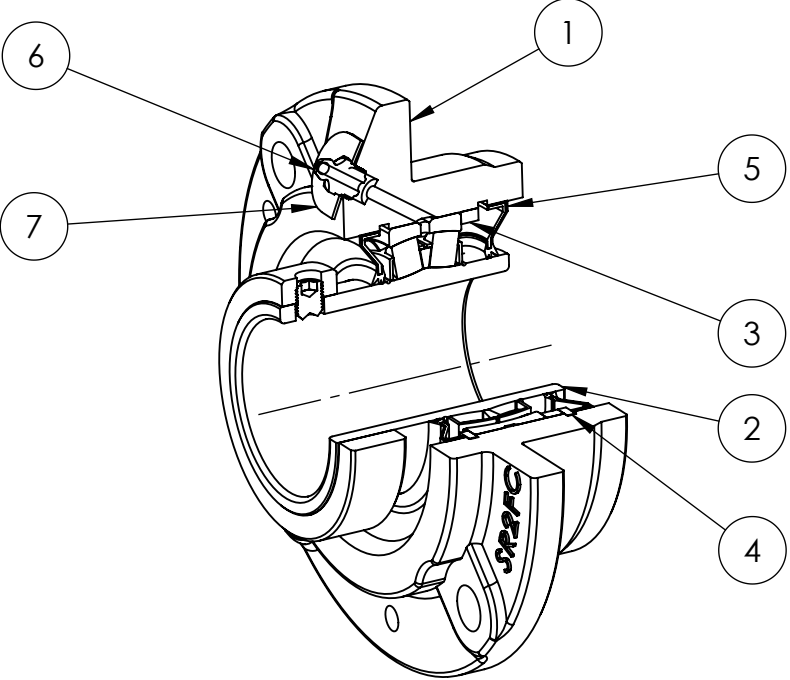
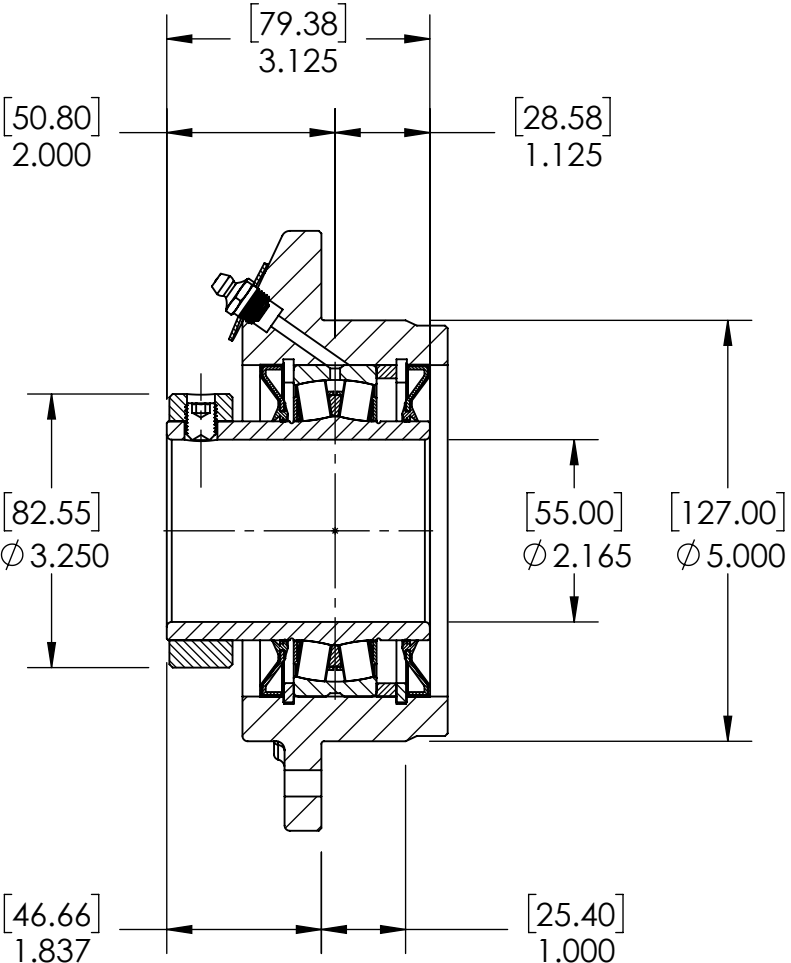
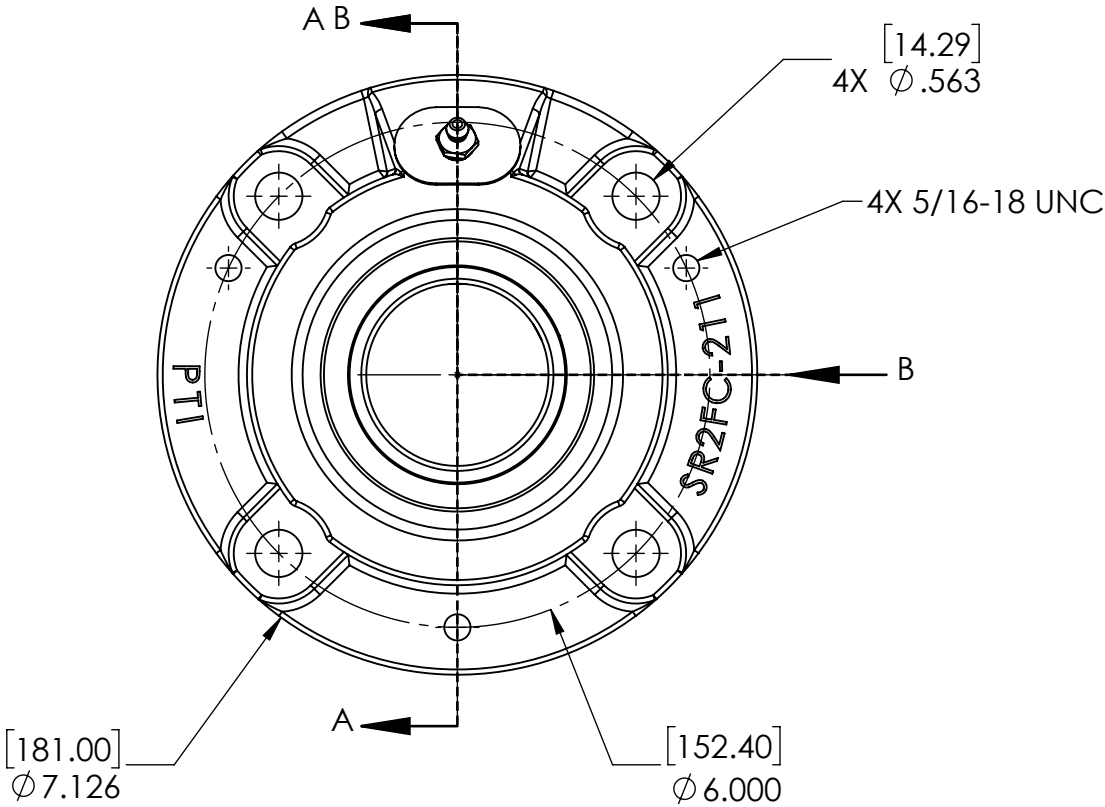


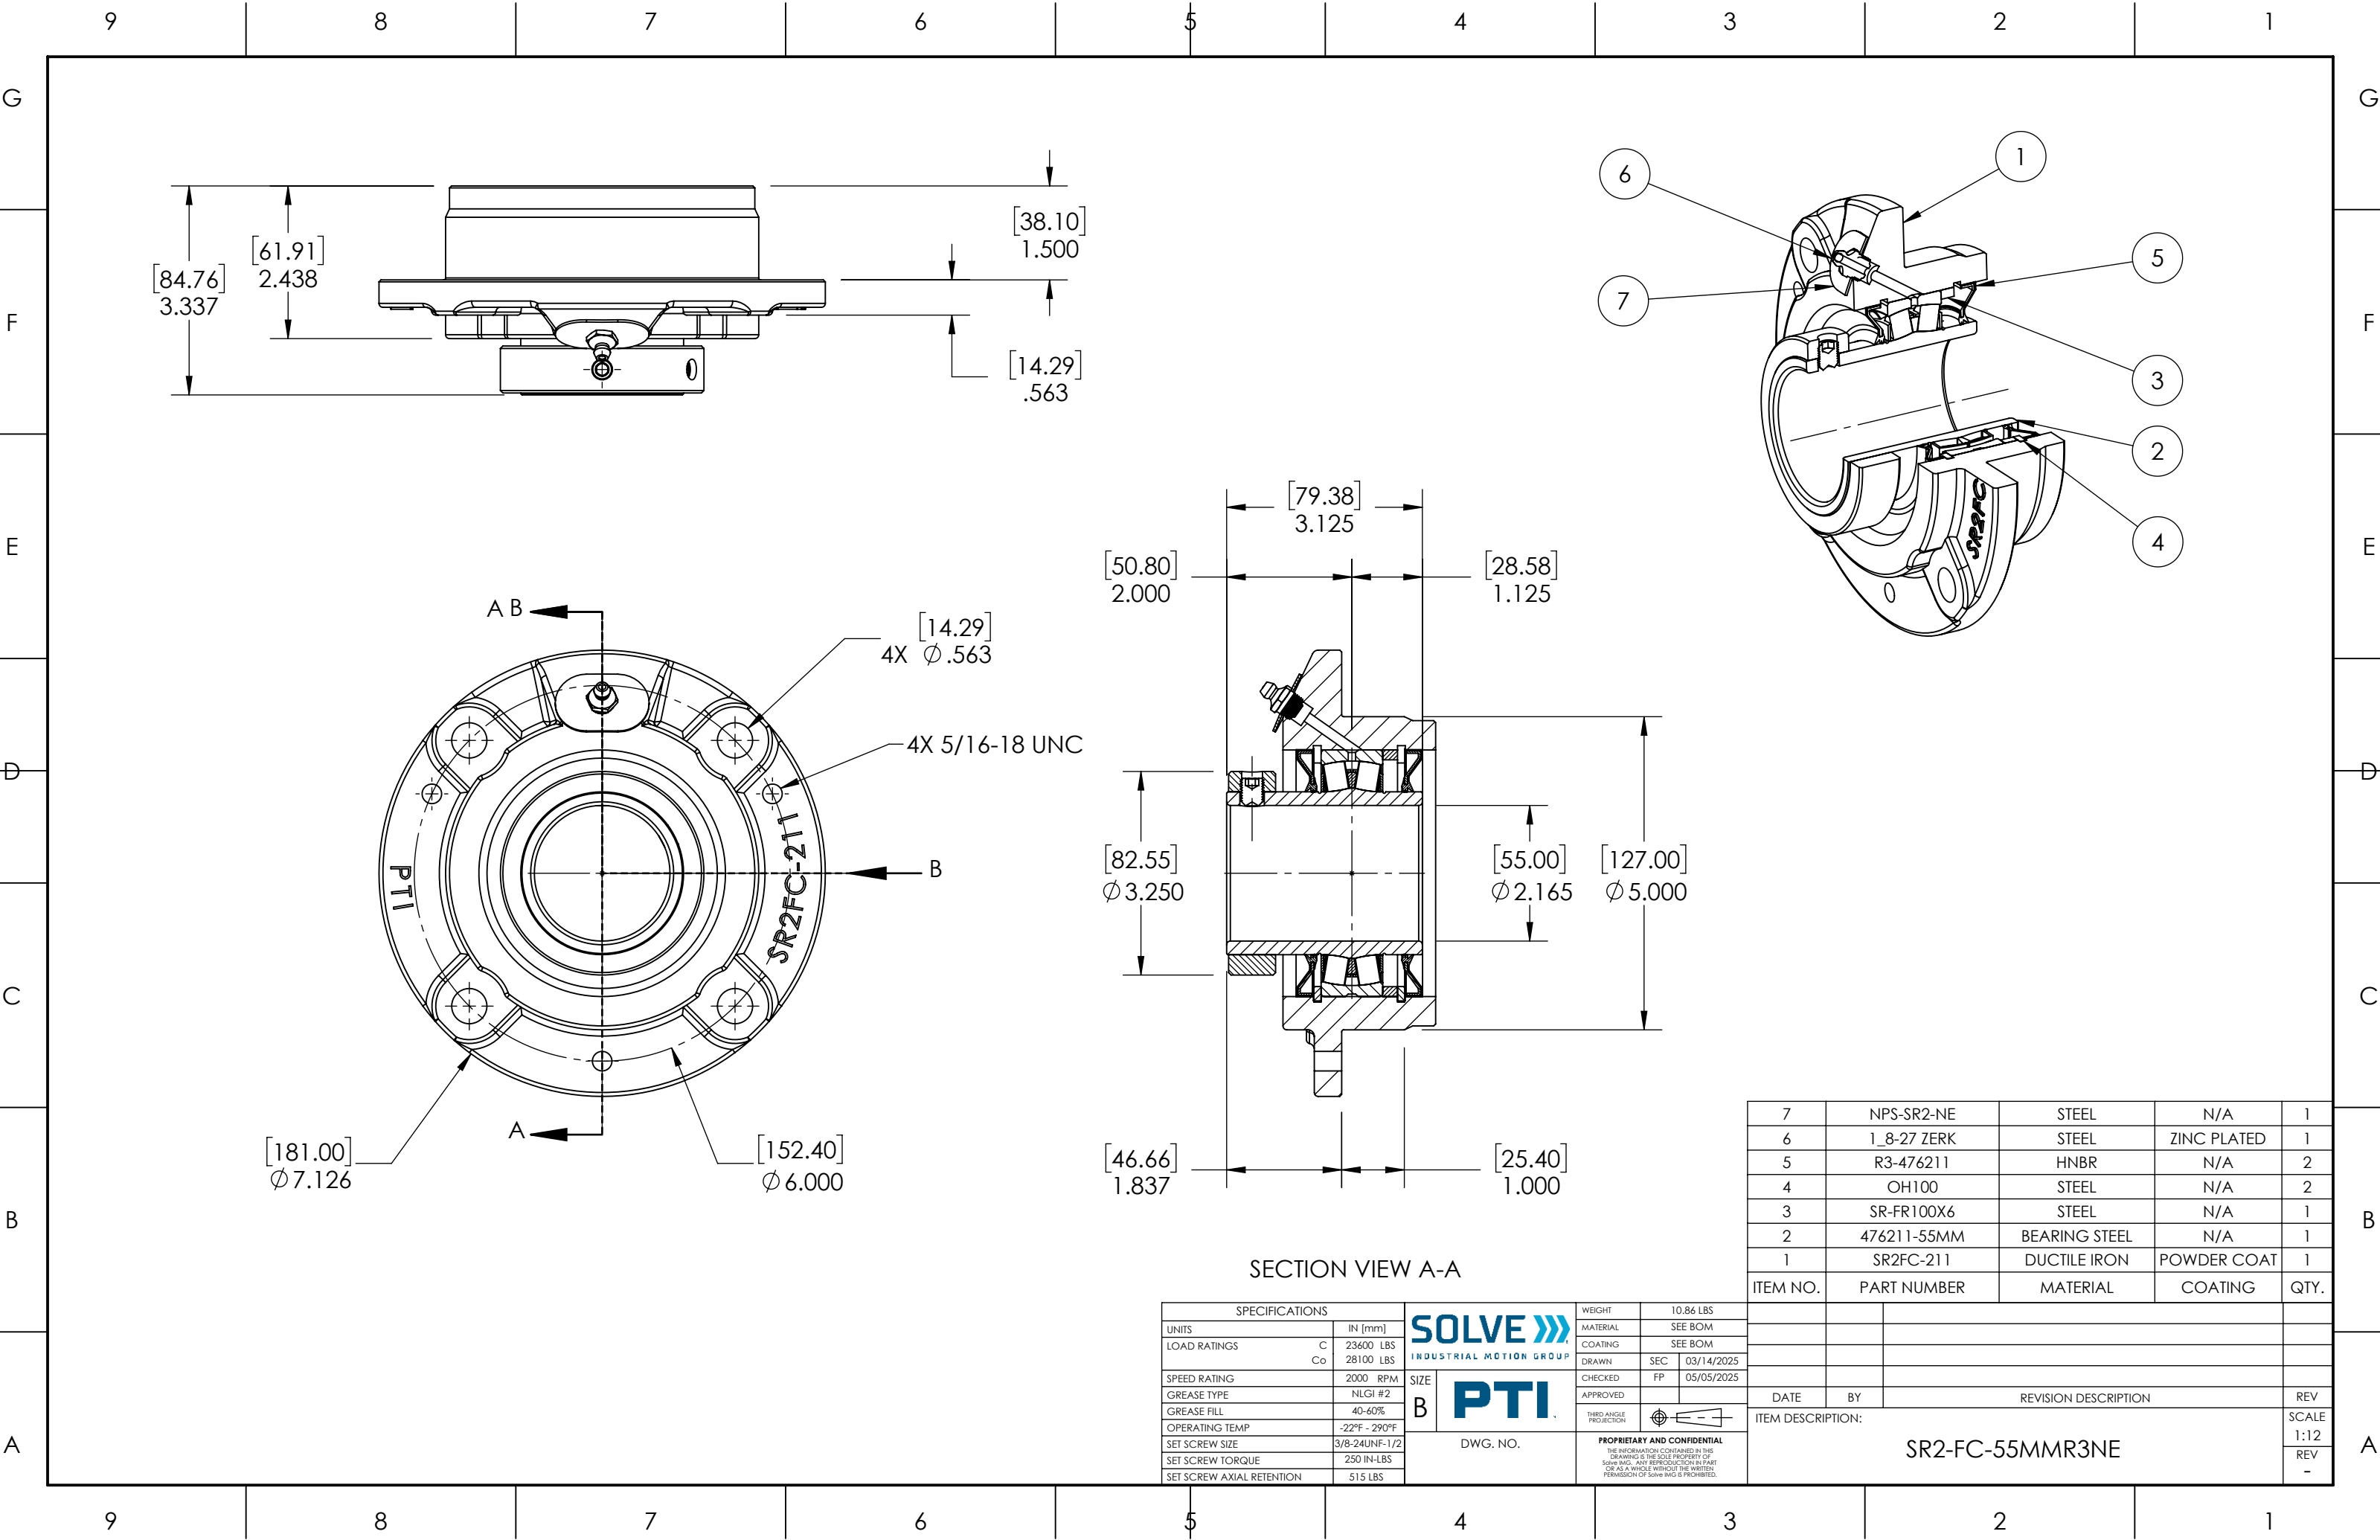

SECTION VIEW A-A

SPECIFICATIONS		SOLVE 		WEIGHT	
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	10.86 LBS
LOAD RATINGS	C 23600 LBS Co 28100 LBS	SIZE		COATING	SEE BOM
SPEED RATING	2000 RPM	PTI		DRAWN	SEC 03/14/2025
GREASE TYPE	NLGI #2	DWG. NO.		CHECKED	FP 05/05/2025
GREASE FILL	40-60%	APPROVED		THIRD ANGLE PROJECTION	
OPERATING TEMP	-22°F - 290°F	PROPRIETARY AND CONFIDENTIAL		DATE	
SET SCREW SIZE	3/8-24UNF-1/2	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.		BY	REVISION DESCRIPTION
SET SCREW TORQUE	250 IN-LBS			ITEM DESCRIPTION:	
SET SCREW AXIAL RETENTION	515 LBS			SR2-FC-55MMR3NE	

ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
7	NPS-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476211	HNBR	N/A	2
4	OH100	STEEL	N/A	2
3	SR-FR100X6	STEEL	N/A	1
2	476211-55MM	BEARING STEEL	N/A	1
1	SR2FC-211	DUCTILE IRON	POWDER COAT	1
REV				
SCALE				
1:12				
REV				
-				