
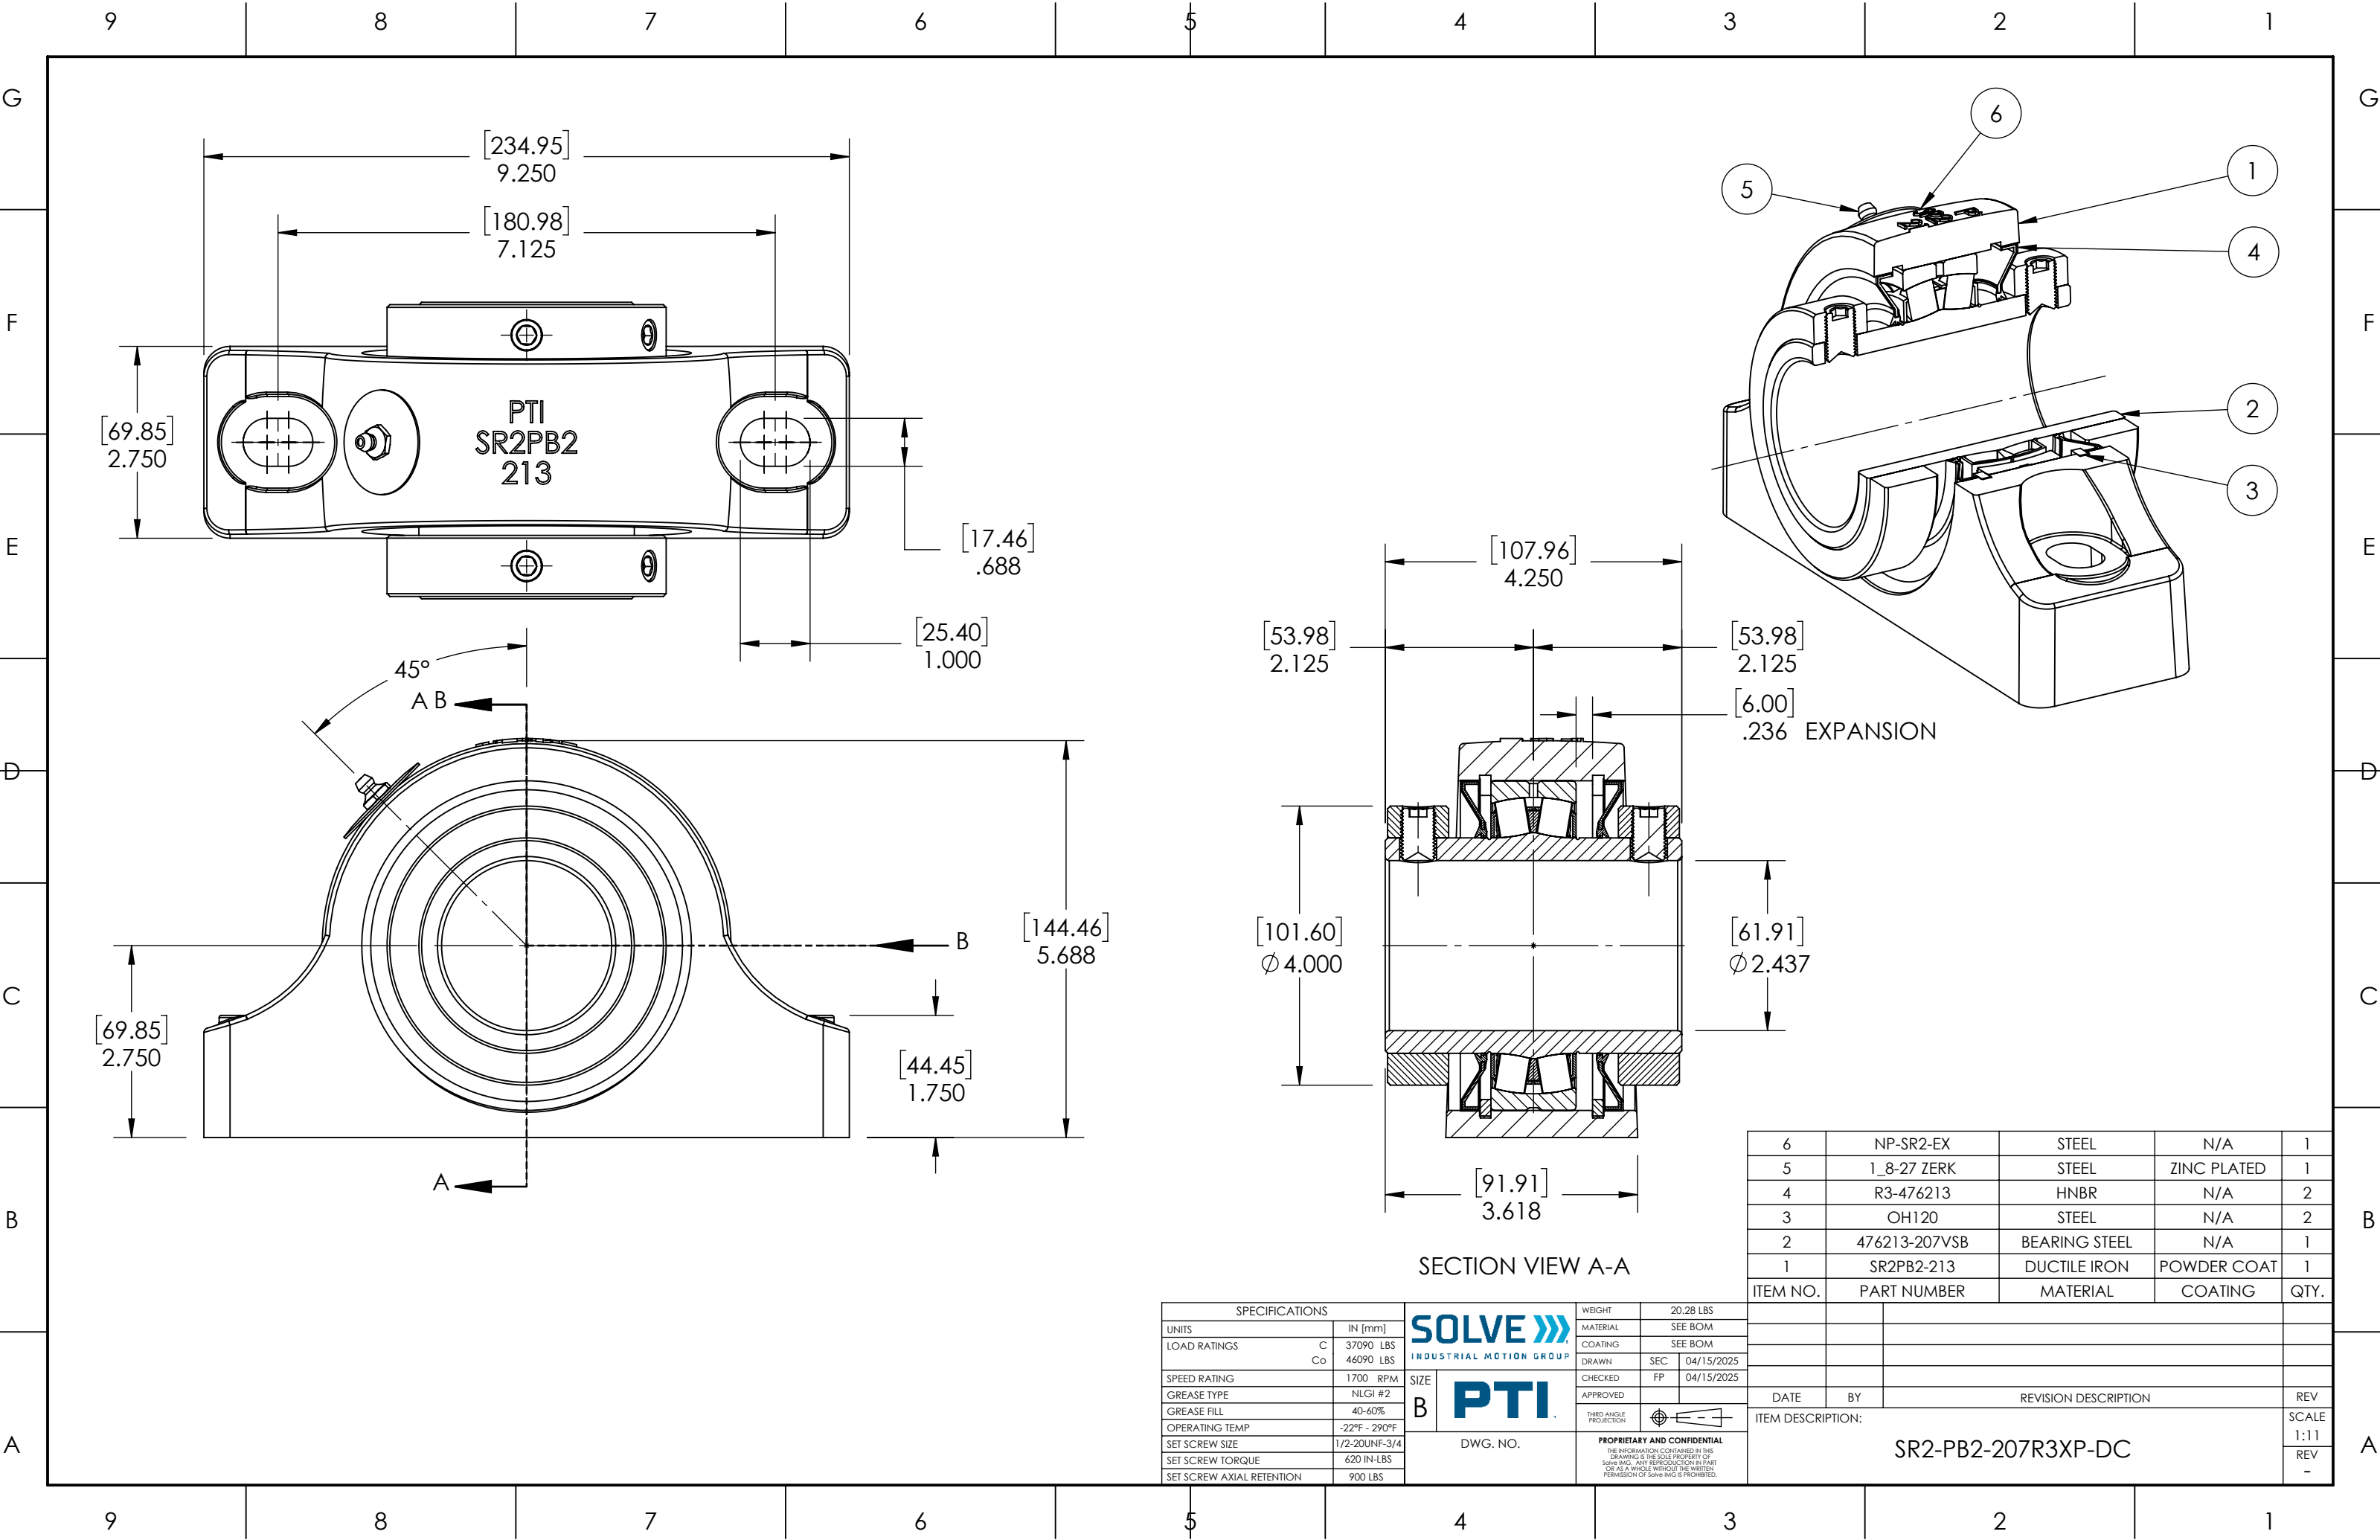




SECTION VIEW A-A

6	NP-SR2-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476213	HNBR	N/A	2
3	OH120	STEEL	N/A	2
2	476213-207VSB	BEARING STEEL	N/A	1
1	SR2PB2-213	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS			 INDUSTRIAL MOTION GROUP		WEIGHT		20.28 LBS		
UNITS	IN [mm]				MATERIAL		SEE BOM		
LOAD RATINGS	C	37090 LBS	SIZE B		COATING		SEE BOM		
	Co	46090 LBS			DRAWN	SEC	04/15/2025		
SPEED RATING	1700 RPM				CHECKED	FP	04/15/2025		
GREASE TYPE	NLGI #2				APPROVED				
GREASE FILL	40-60%								
OPERATING TEMP	-22°F - 290°F								
SET SCREW SIZE	1/2-20UNF-3/4								
SET SCREW TORQUE	620 IN-LBS				DWG. NO.		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMG IS PROHIBITED.		
SET SCREW AXIAL RETENTION	900 LBS								

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION: SR2-PB2-207R3XP-DC			SCALE 1:11
			REV -