


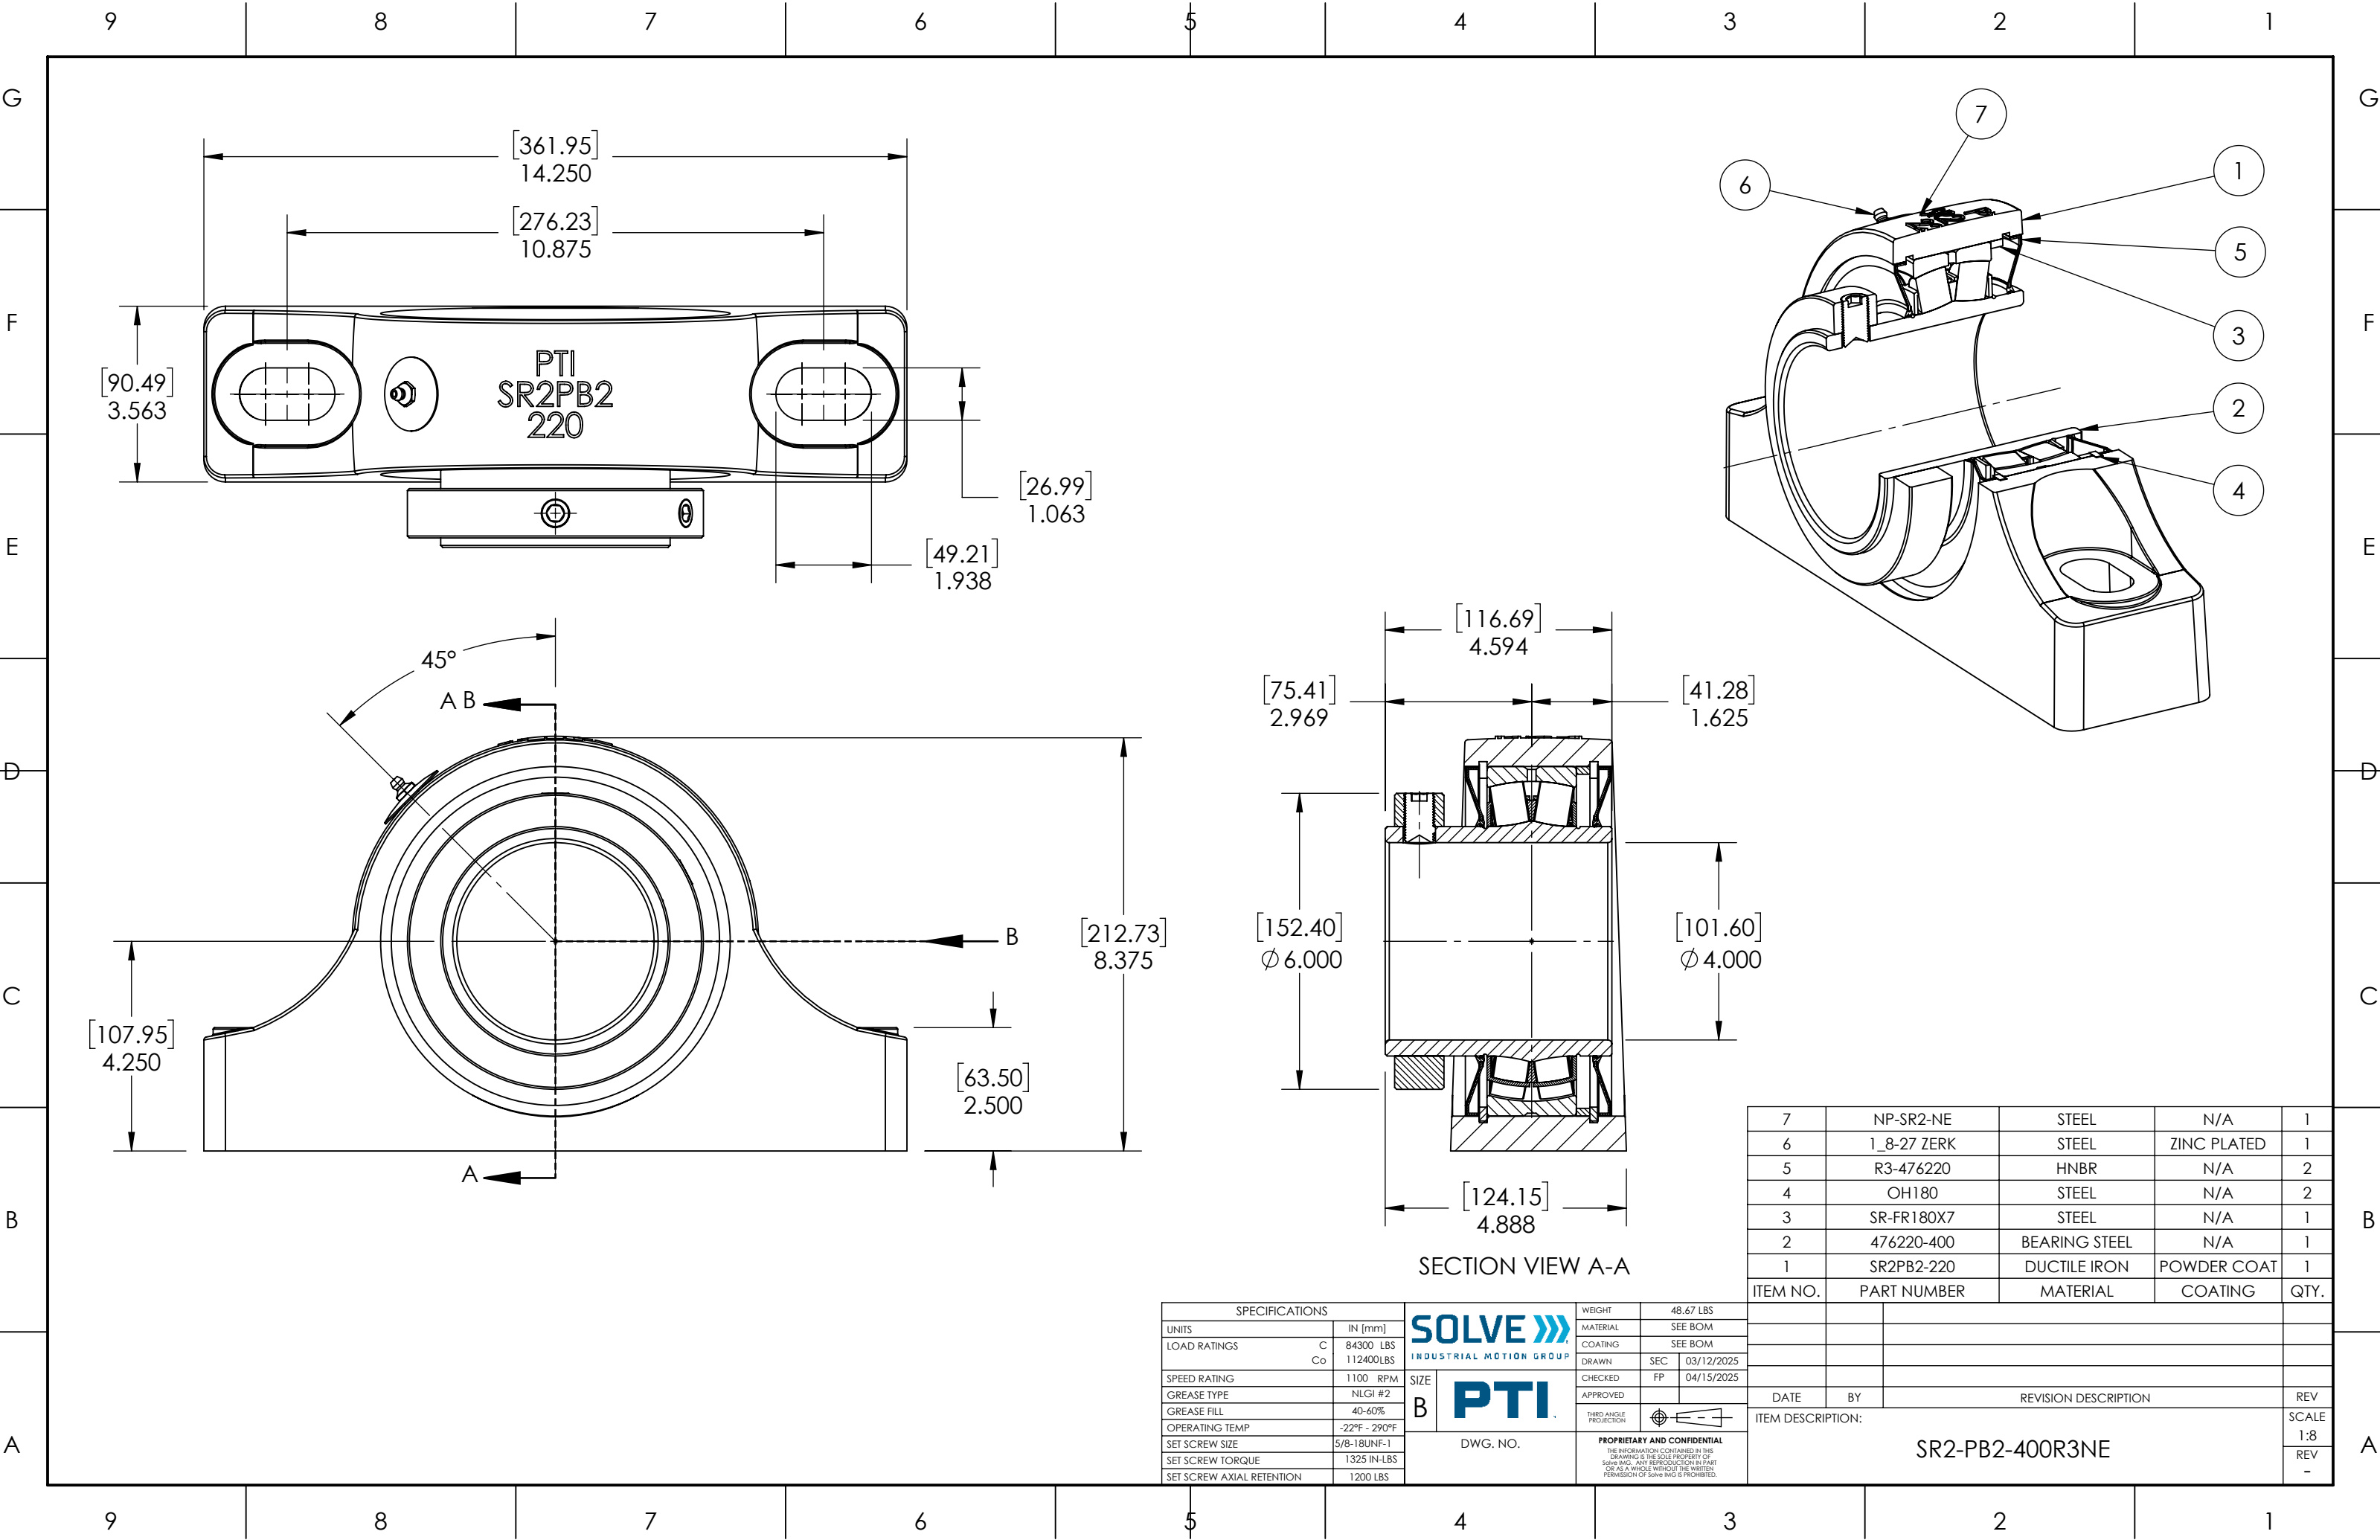

SECTION VIEW A-A

7	NP-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476220	HNBR	N/A	2
4	OH180	STEEL	N/A	2
3	SR-FR180X7	STEEL	N/A	1
2	476220-400	BEARING STEEL	N/A	1
1	SR2PB2-220	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	48.67 LBS
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C Co	PTI		COATING	SEE BOM
SPEED RATING	1100 RPM	SIZE	B	DRAWN	SEC 03/12/2025
GREASE TYPE	NLGI #2	DWG. NO.		CHECKED	FP 04/15/2025
GREASE FILL	40-60%	APPROVED		APPROVED	
OPERATING TEMP	-22°F - 290°F	THIRD ANGLE PROJECTION		DATE	
SET SCREW SIZE	5/8-18UNF-1	PROPRIETARY AND CONFIDENTIAL		BY	
SET SCREW TORQUE	1325 IN-LBS	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.		REVISION DESCRIPTION	
SET SCREW AXIAL RETENTION	1200 LBS			ITEM DESCRIPTION:	

DATE	BY	REVISION DESCRIPTION	REV
		SR2-PB2-400R3NE	1:8
			REV