
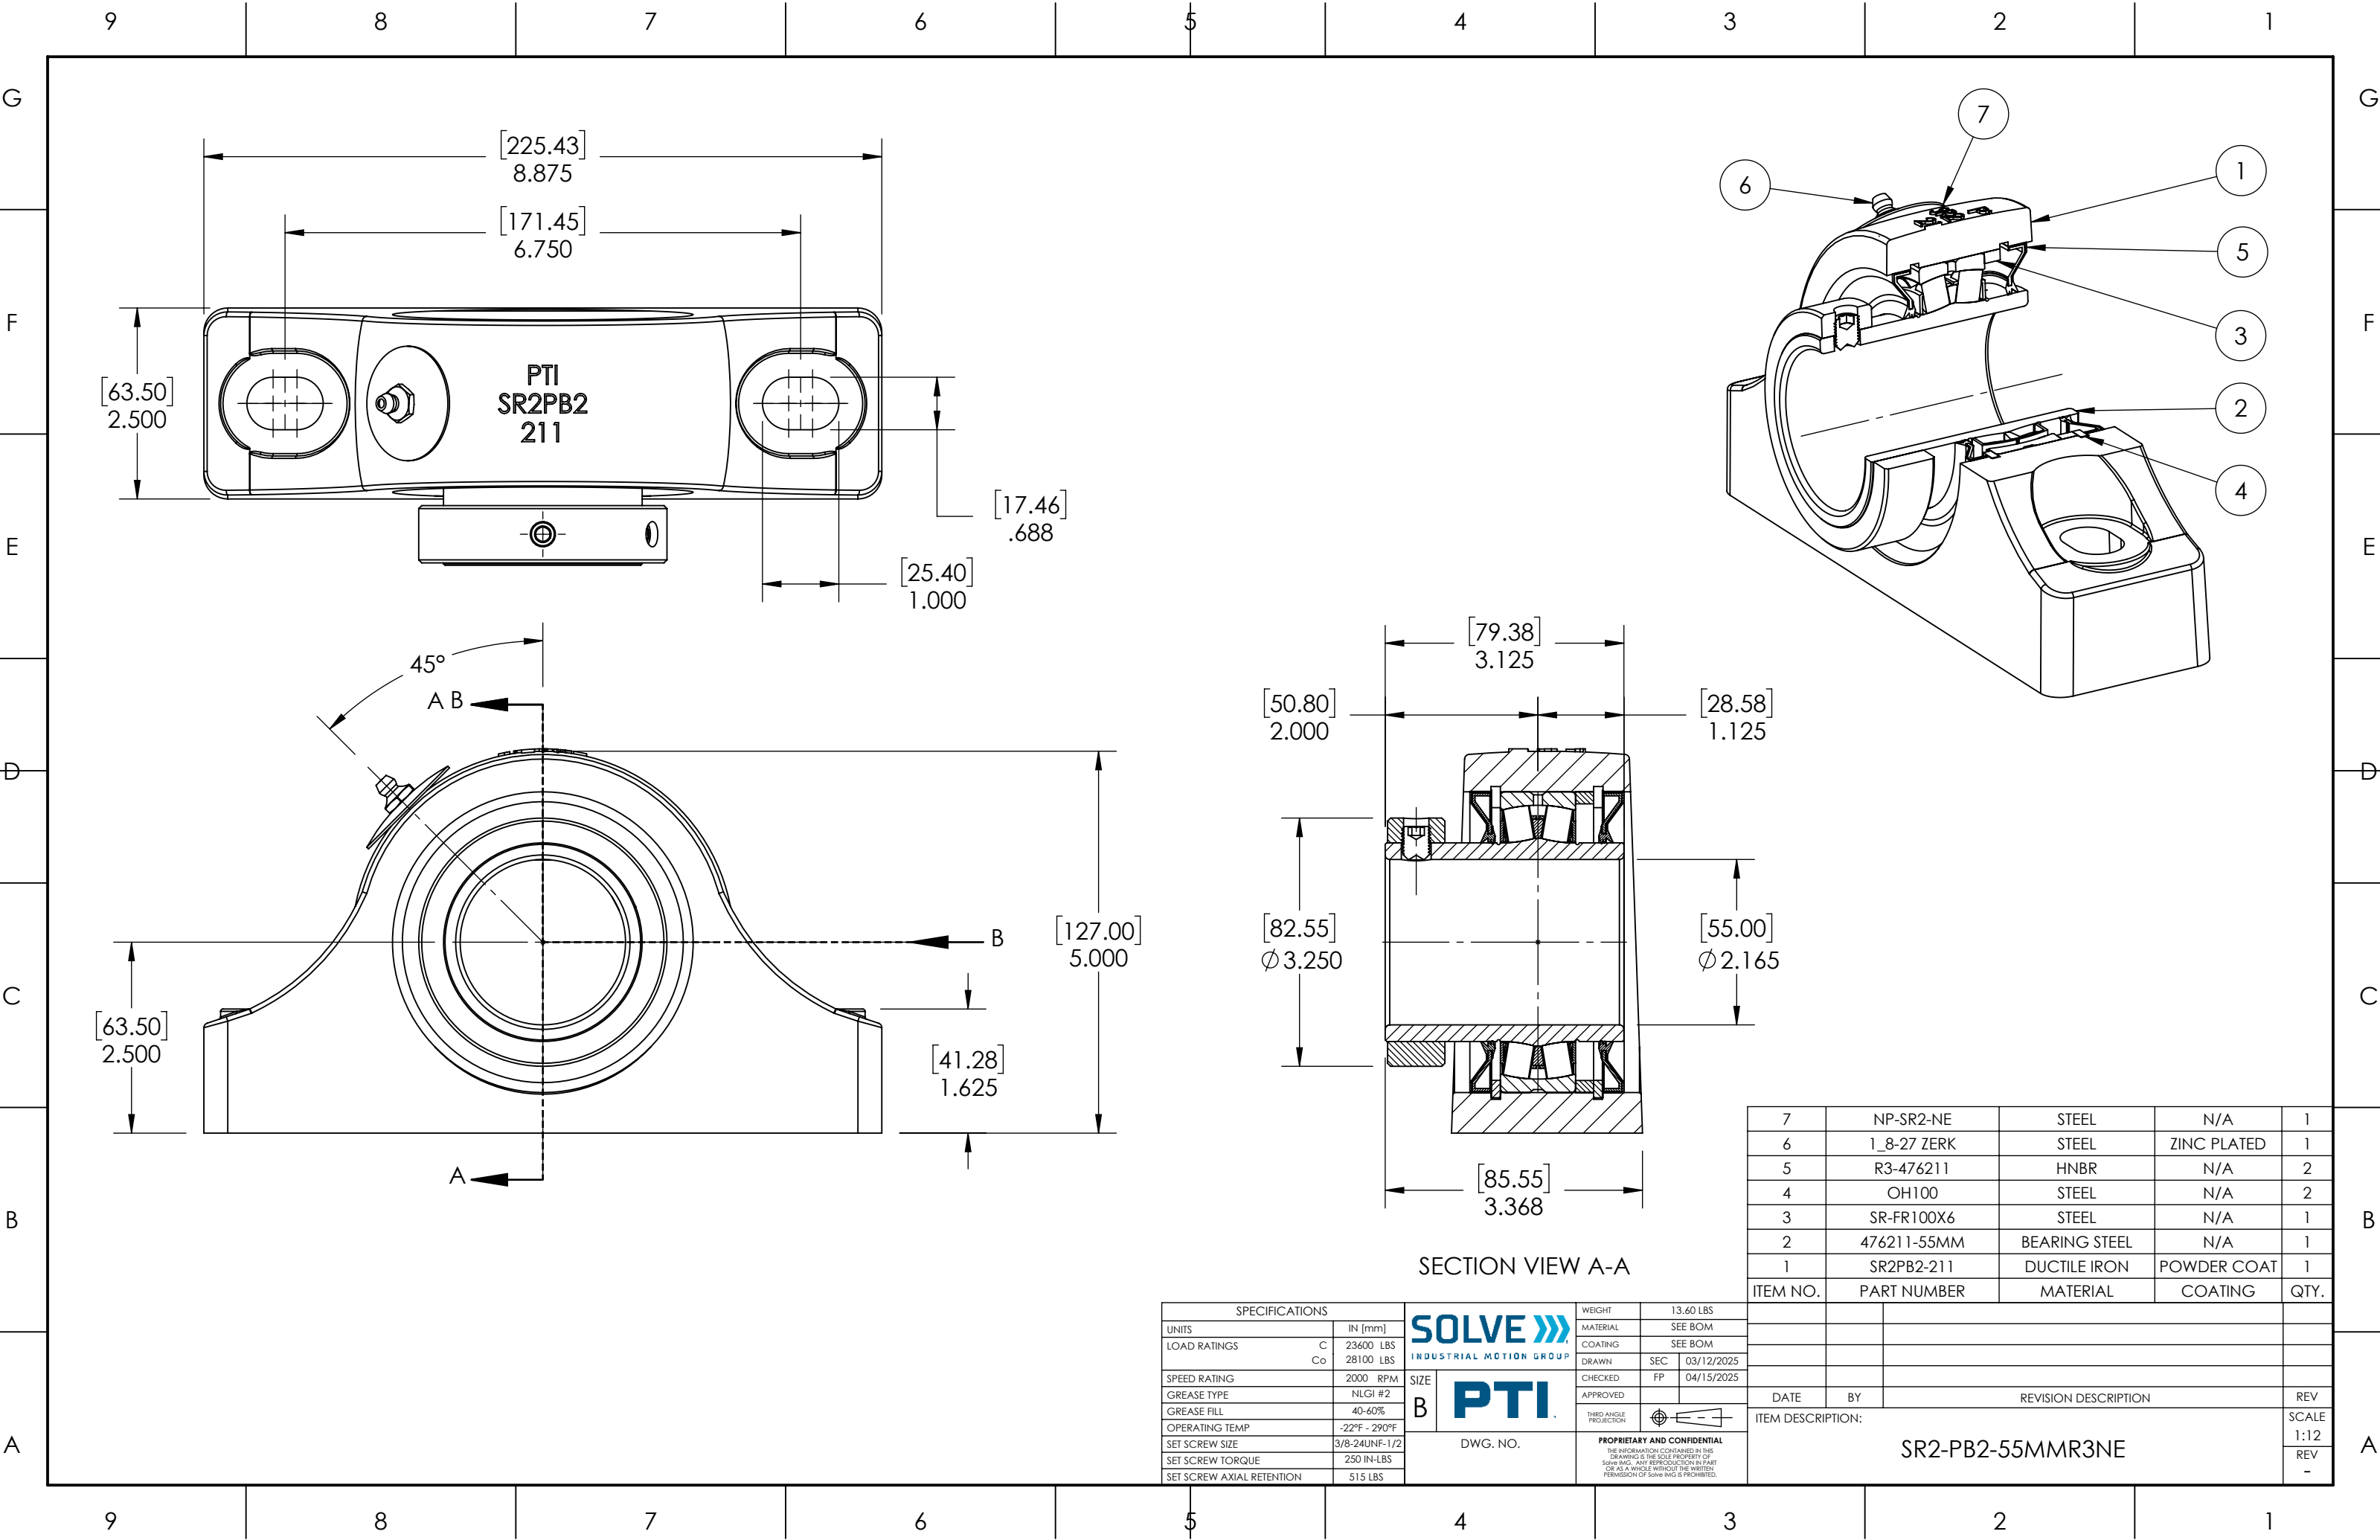




SPECIFICATIONS				WEIGHT	
UNITS	IN [mm]	SOLVE 		13.60 LBS	
LOAD RATINGS	C	23600 LBS	INDUSTRIAL MOTION GROUP	MATERIAL SEE BOM	
	Co	28100 LBS		COATING SEE BOM	
SPEED RATING		2000 RPM	PTI 	DRAWN	SEC 03/12/2025
GREASE TYPE		NLGI #2		CHECKED	FP 04/15/2025
GREASE FILL		40-60%	DWG. NO.	APPROVED	
OPERATING TEMP		-22°F - 290°F		THIRD ANGLE PROJECTION 	
SET SCREW SIZE		3/8-24UNF-1/2		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW TORQUE		250 IN-LBS			
SET SCREW AXIAL RETENTION		515 LBS			

7	NP-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476211	HNBR	N/A	2
4	OH100	STEEL	N/A	2
3	SR-FR100X6	STEEL	N/A	1
2	476211-55MM	BEARING STEEL	N/A	1
1	SR2PB2-211	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE BY REVISION DESCRIPTION				
ITEM DESCRIPTION:				REV
SR2-PB2-55MMR3NE				SCALE
				1:12
				REV
				-