
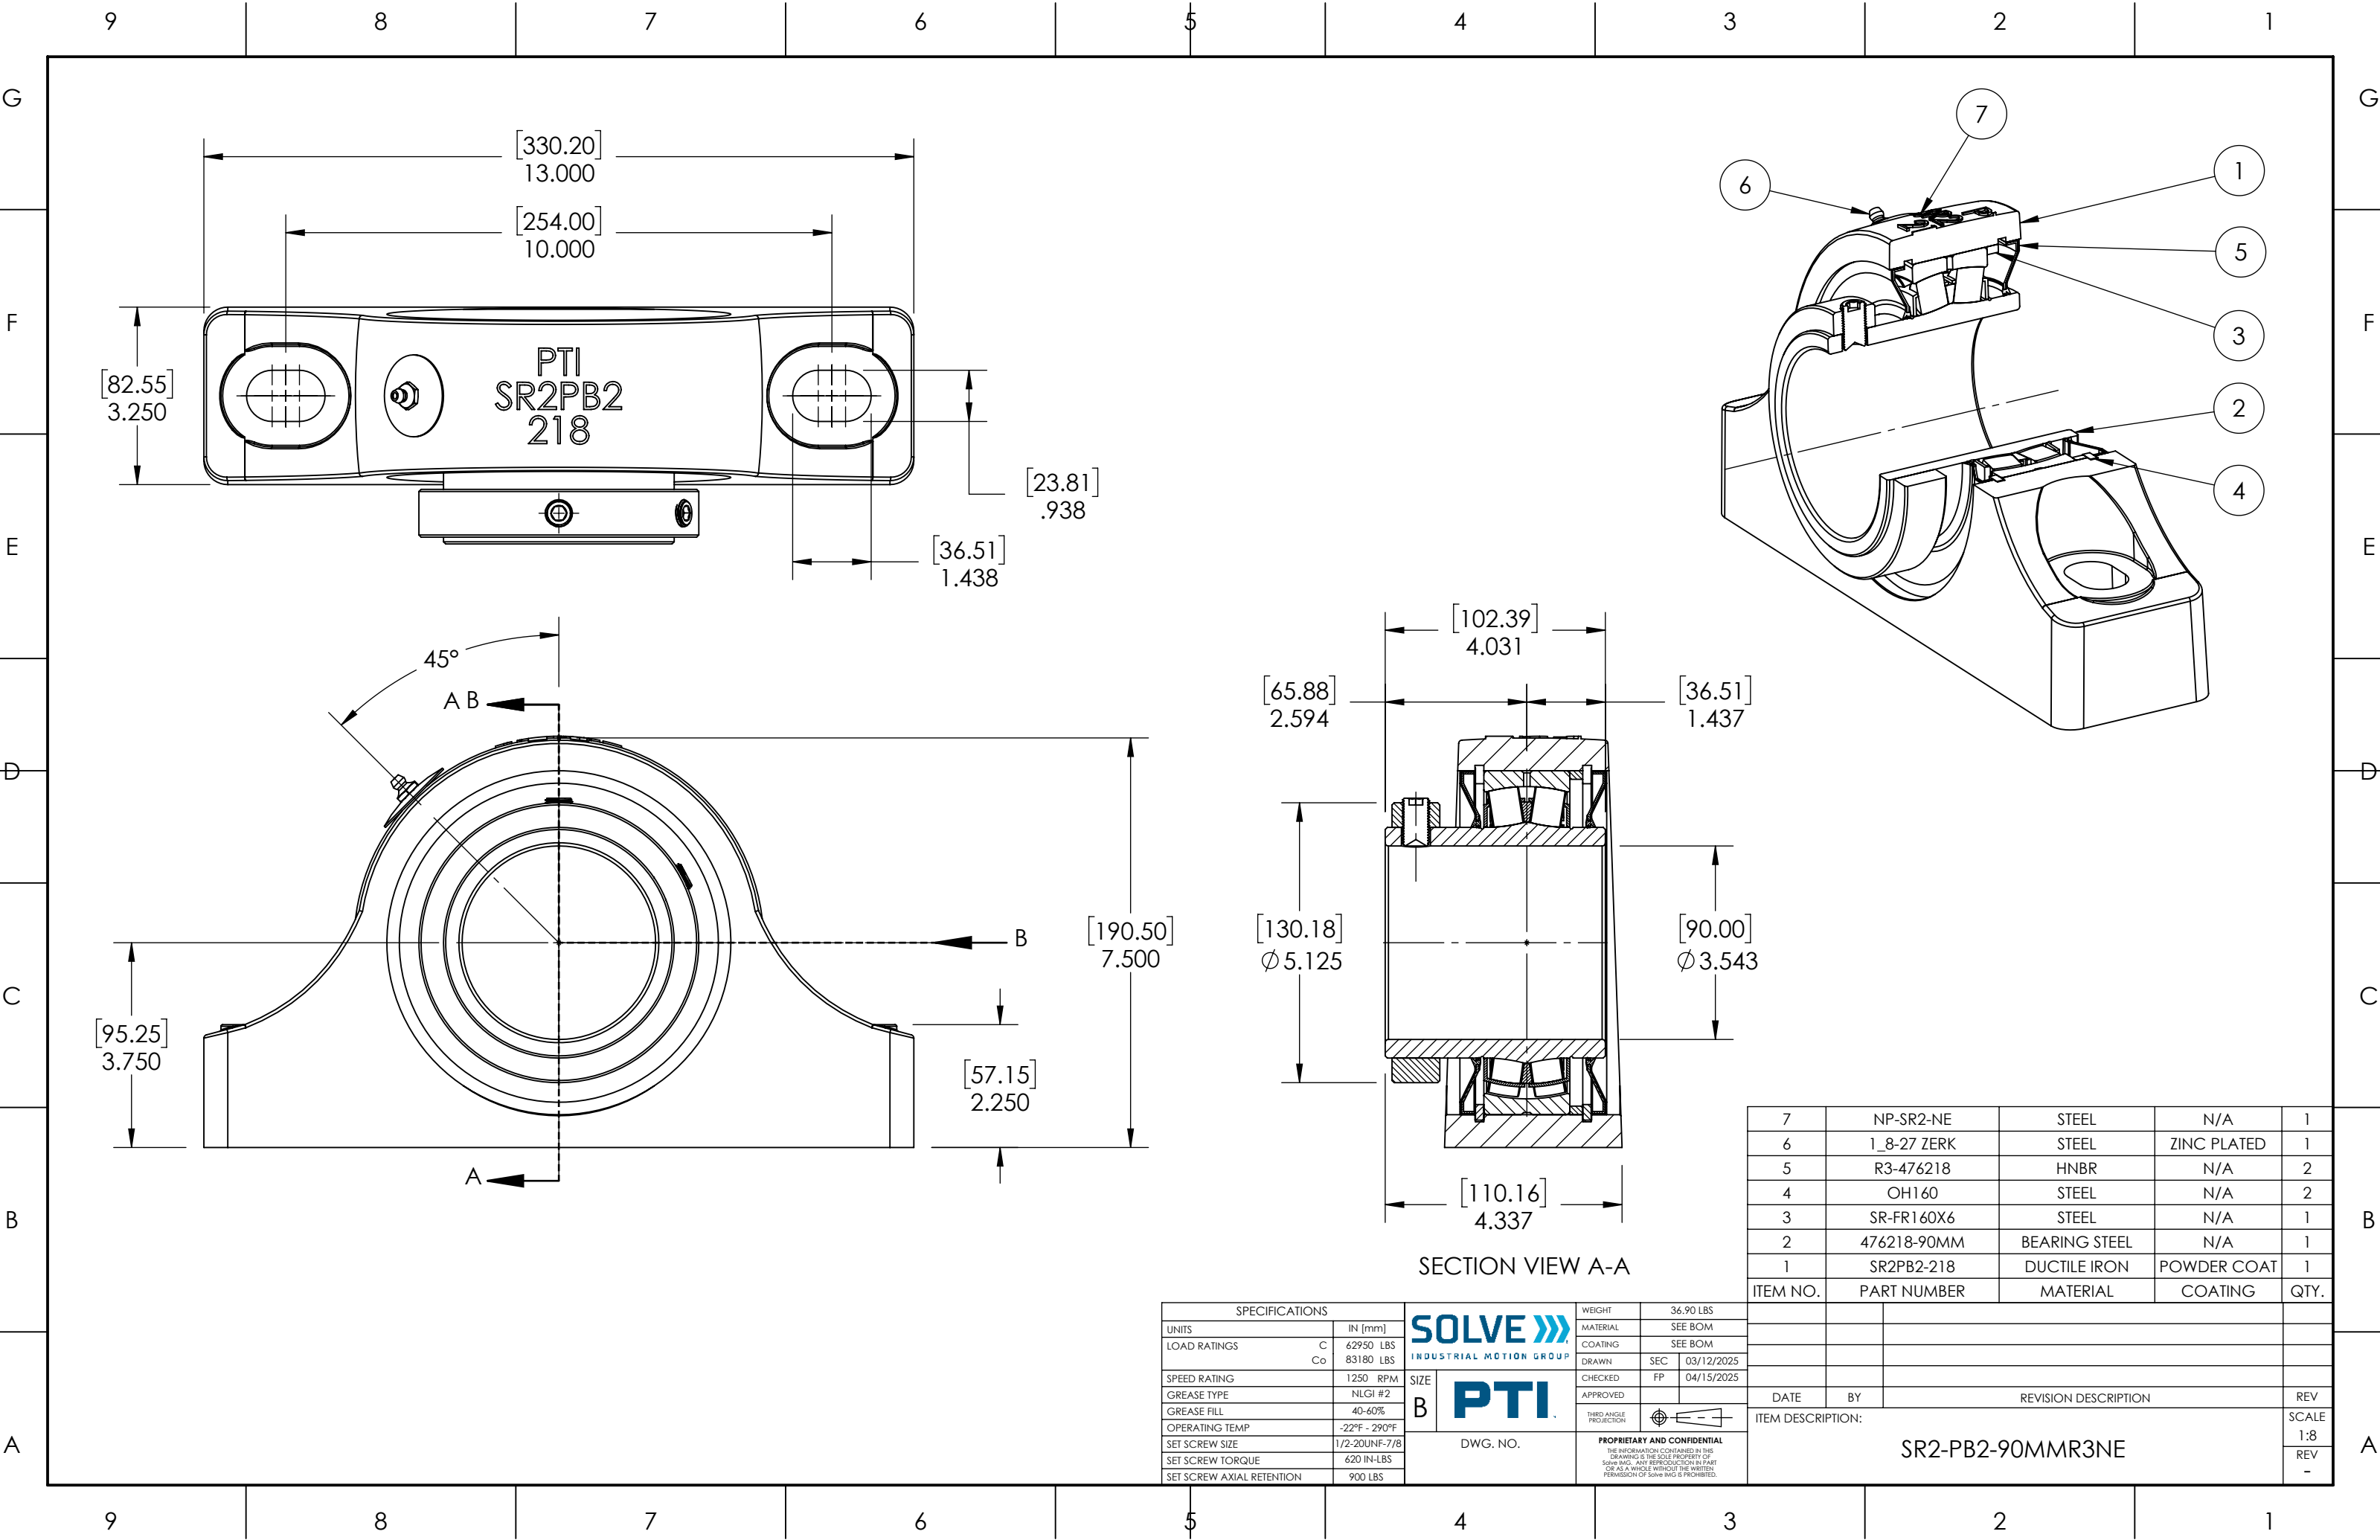




SECTION VIEW A-A

7	NP-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476218	HNBR	N/A	2
4	OH160	STEEL	N/A	2
3	SR-FR160X6	STEEL	N/A	1
2	476218-90MM	BEARING STEEL	N/A	1
1	SR2PB2-218	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	36.90 LBS
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C Co 62950 LBS 83180 LBS			COATING	SEE BOM
SPEED RATING	1250 RPM	SIZE	B	DRAWN	SEC 03/12/2025
GREASE TYPE	NLGI #2	PTI		CHECKED	FP 04/15/2025
GREASE FILL	40-60%			APPROVED	
OPERATING TEMP	-22°F - 290°F	DWG. NO.		THIRD ANGLE PROJECTION	
SET SCREW SIZE	1/2-20UNF-7/8			PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW TORQUE	620 IN-LBS				
SET SCREW AXIAL RETENTION	900 LBS				

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION: SR2-PB2-90MMR3NE			SCALE 1:8
			REV -