


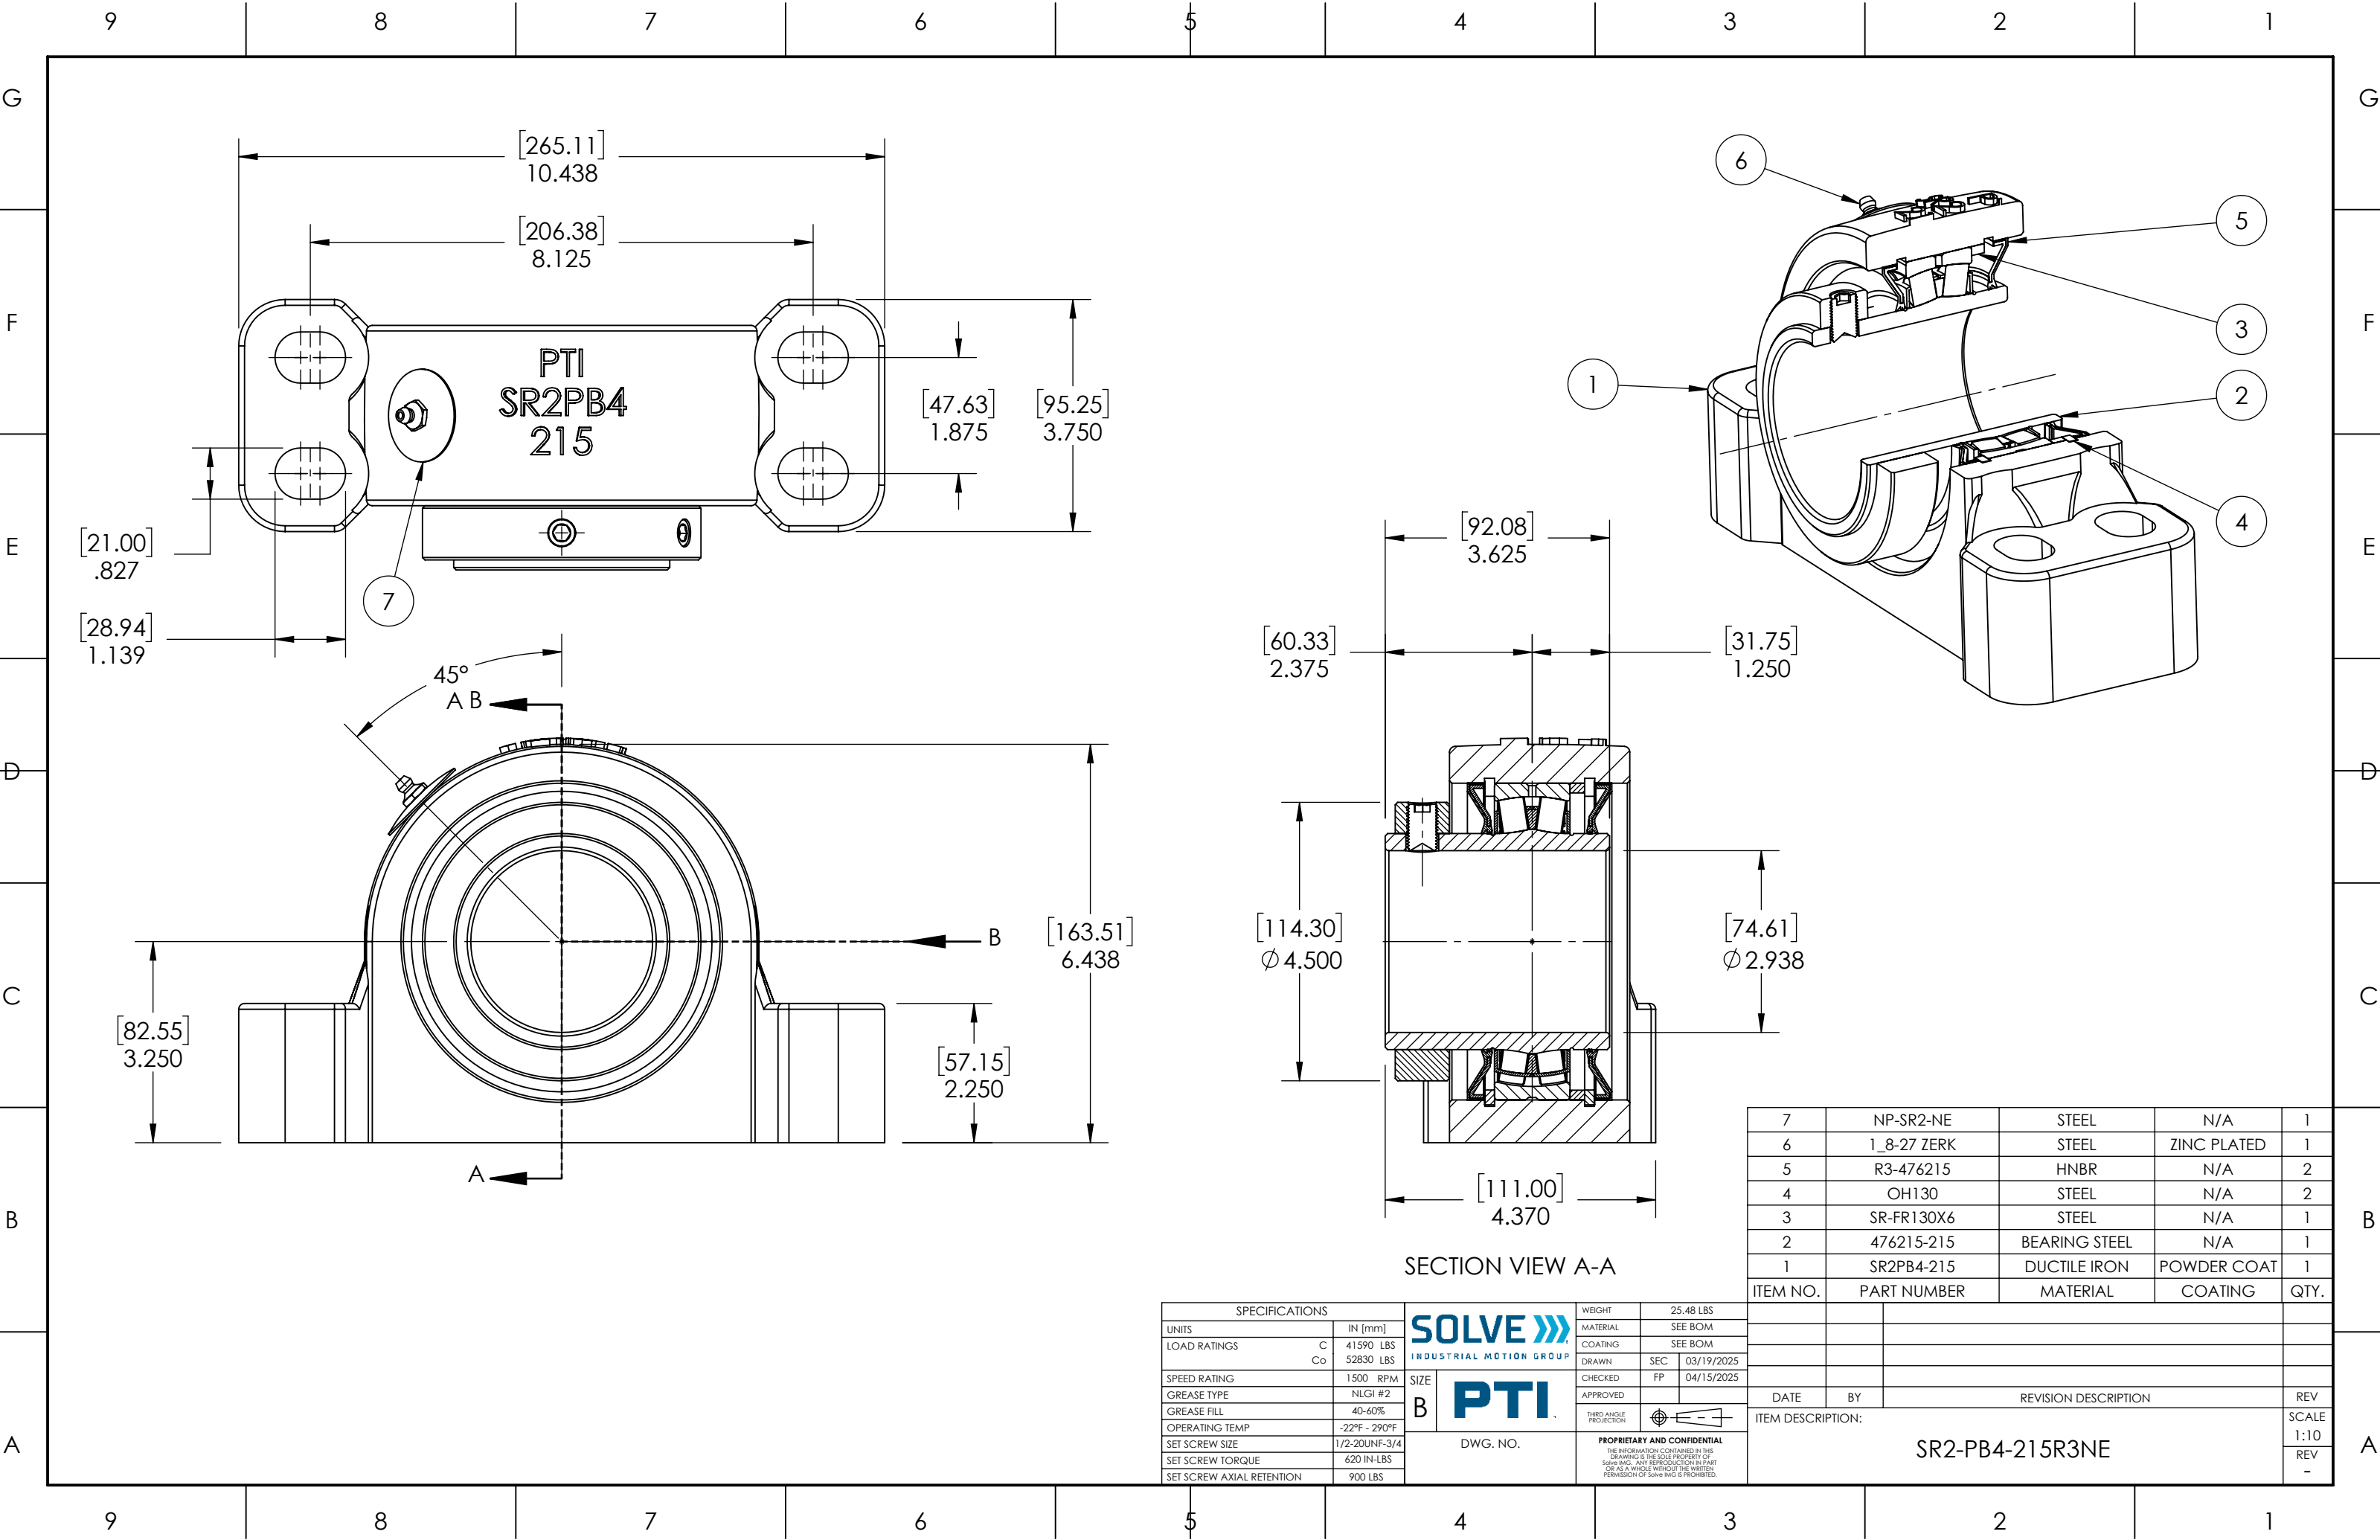

SECTION VIEW A-A

7	NP-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476215	HNBR	N/A	2
4	OH130	STEEL	N/A	2
3	SR-FR130X6	STEEL	N/A	1
2	476215-215	BEARING STEEL	N/A	1
1	SR2PB4-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	25.48 LBS
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C Co	41590 LBS 52830 LBS	COATING	SEE BOM	
SPEED RATING		1500 RPM	DRAWN	SEC	03/19/2025
GREASE TYPE		NLGI #2	CHECKED	FP	04/15/2025
GREASE FILL		40-60%	APPROVED		
OPERATING TEMP		-22°F - 290°F	THIRD ANGLE PROJECTION		
SET SCREW SIZE		1/2-20UNF-3/4	DWG. NO.		
SET SCREW TORQUE		620 IN-LBS	PROPRIETARY AND CONFIDENTIAL		
SET SCREW AXIAL RETENTION		900 LBS	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.		

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SR2-PB4-215R3NE			1:10
			REV
			-