


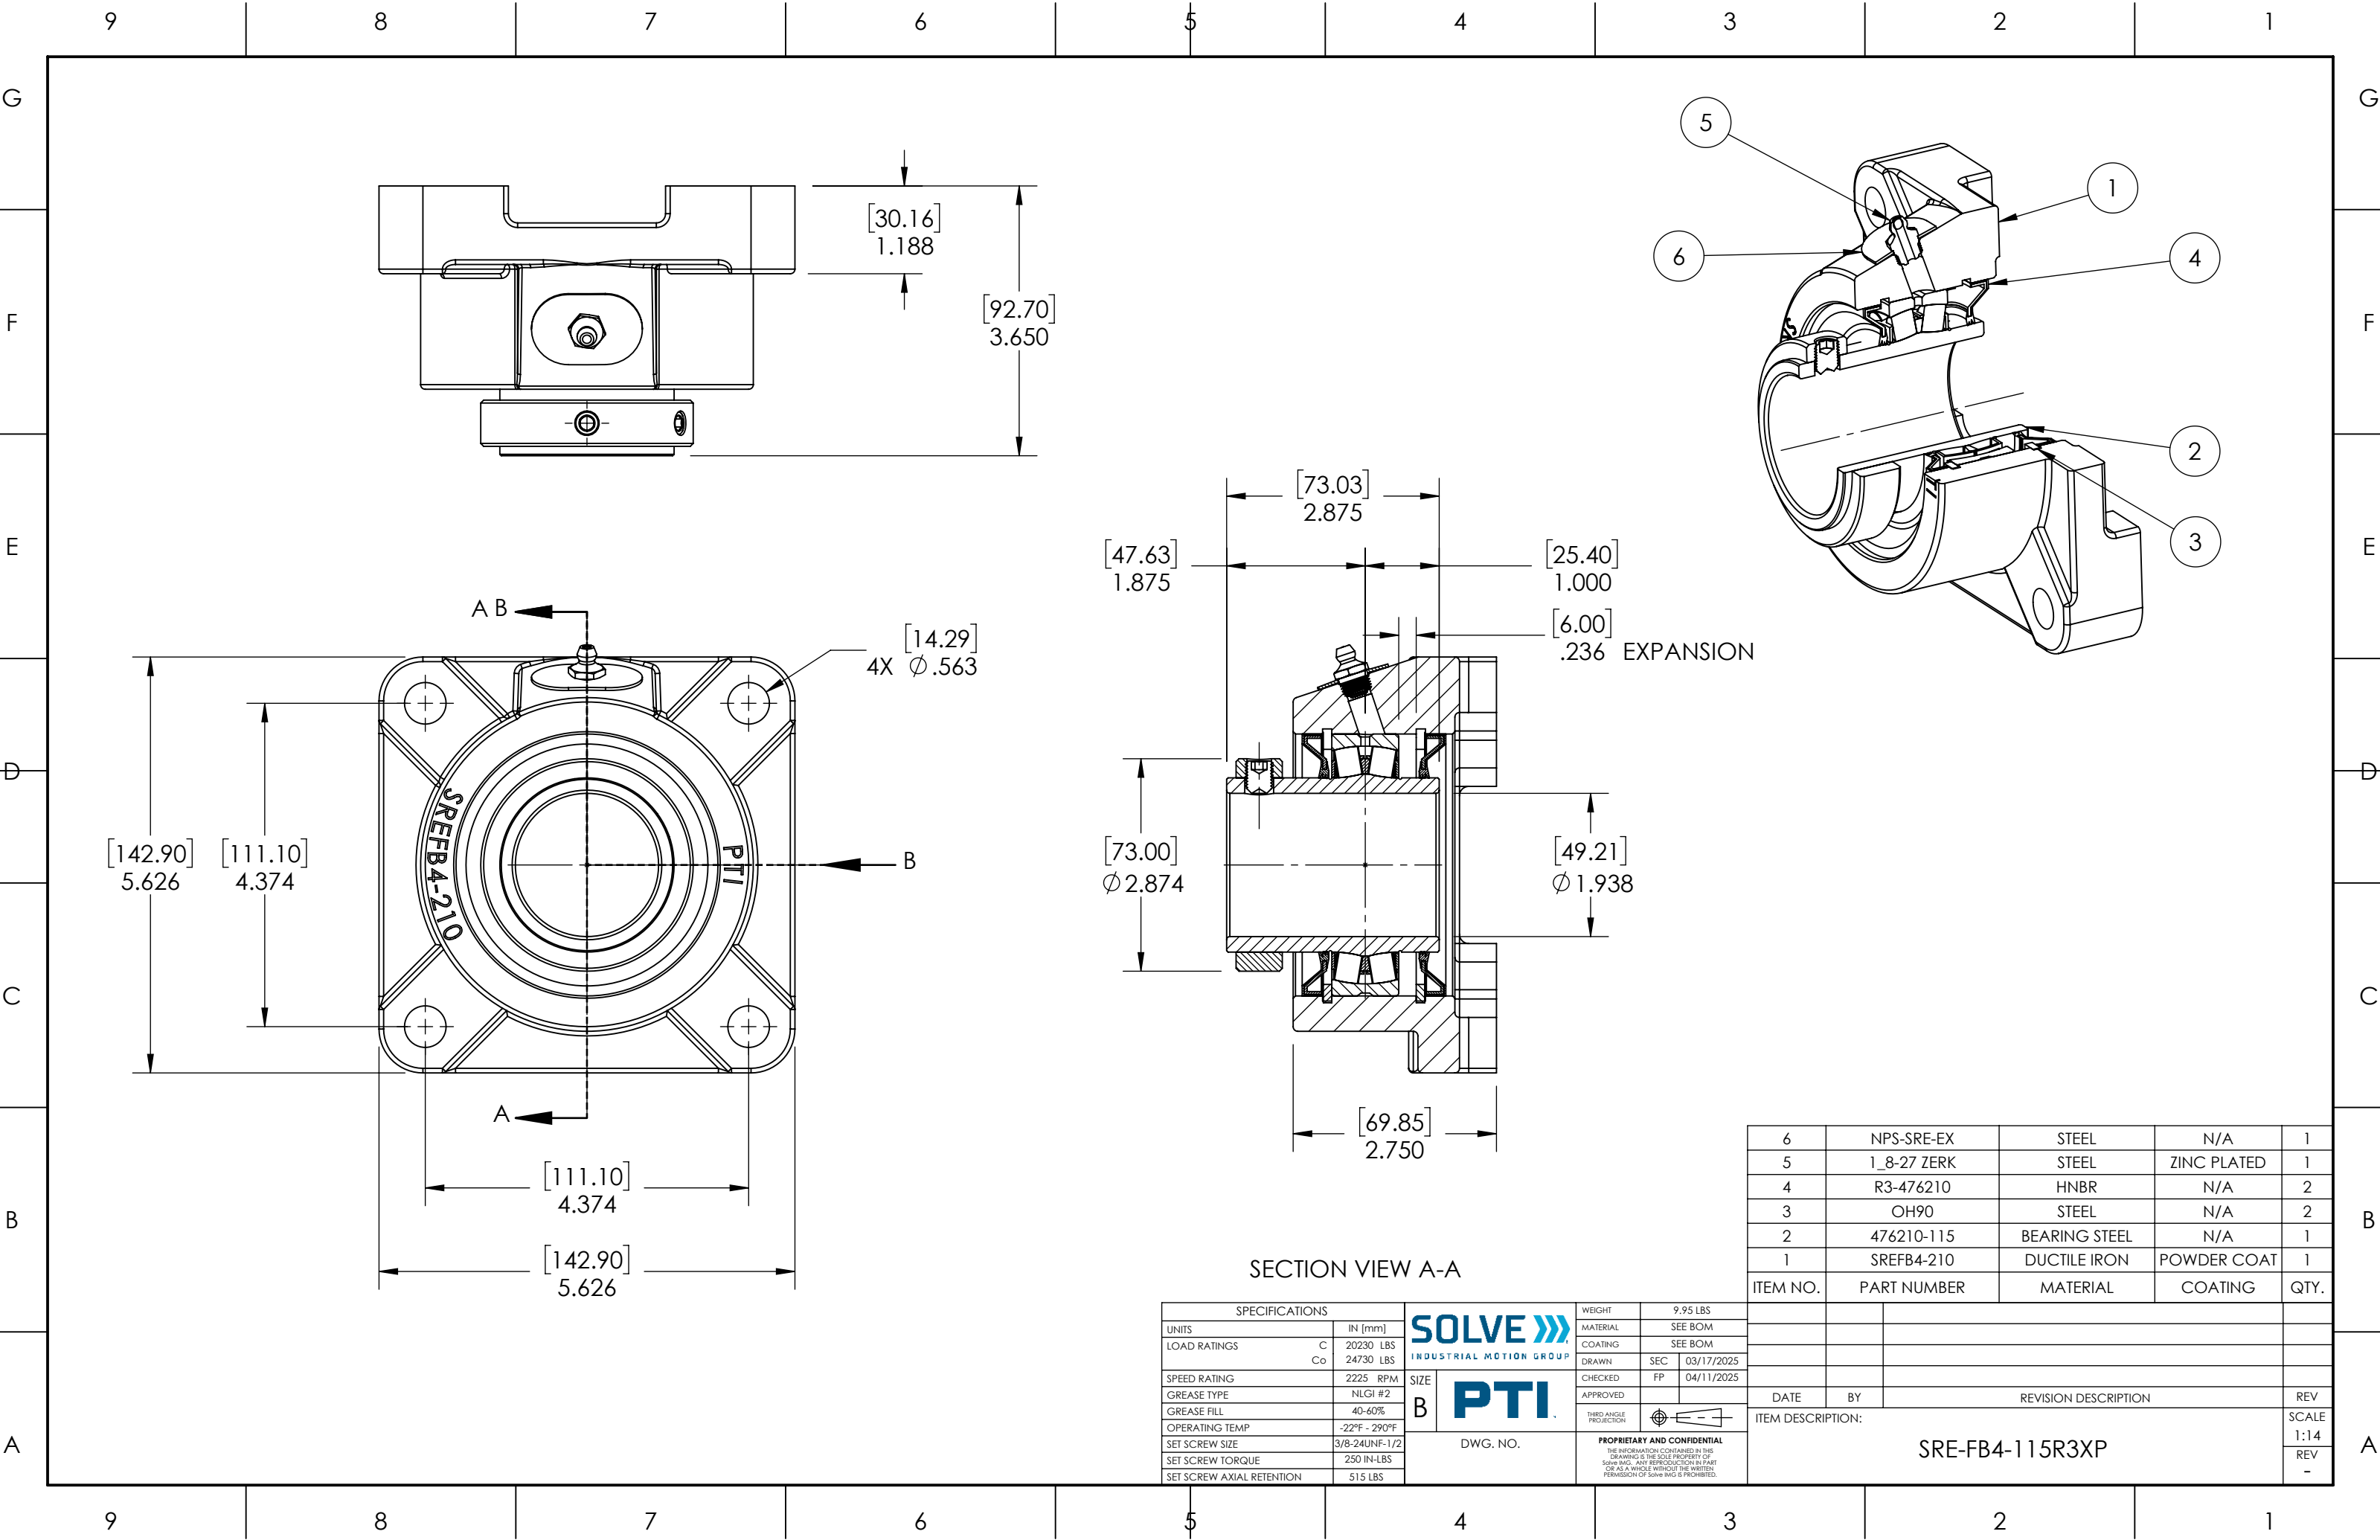

SECTION VIEW A-A

SPECIFICATIONS				SOLVE INDUSTRIAL MOTION GROUP		WEIGHT		9.95 LBS	
UNITS						MATERIAL		SEE BOM	
LOAD RATINGS		C	20230 LBS	SIZE		COATING		SEE BOM	
		Co	24730 LBS			DRAWN		SEC	03/17/2025
SPEED RATING		2225 RPM		B		CHECKED		FP	04/11/2025
GREASE TYPE		NLGI #2				APPROVED		THIRD ANGLE PROJECTION	
GREASE FILL		40-60%		DWG. NO.					
OPERATING TEMP		-22°F - 290°F							
SET SCREW SIZE		3/8-24UNF-1/2							
SET SCREW TORQUE		250 IN-LBS		PTI 		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMG IS PROHIBITED.			
SET SCREW AXIAL RETENTION		515 LBS							

SOLVE 
INDUSTRIAL MOTION GROUP

SIZE **PTI**

DWG. NO.

6	NPS-SRE-EX	STEEL	N/A	1
5	1.8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476210	HNBR	N/A	2
3	OH90	STEEL	N/A	2
2	476210-115	BEARING STEEL	N/A	1
1	SREFB4-210	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SRE-FB4-115R3XP			1:14
			REV
			-