


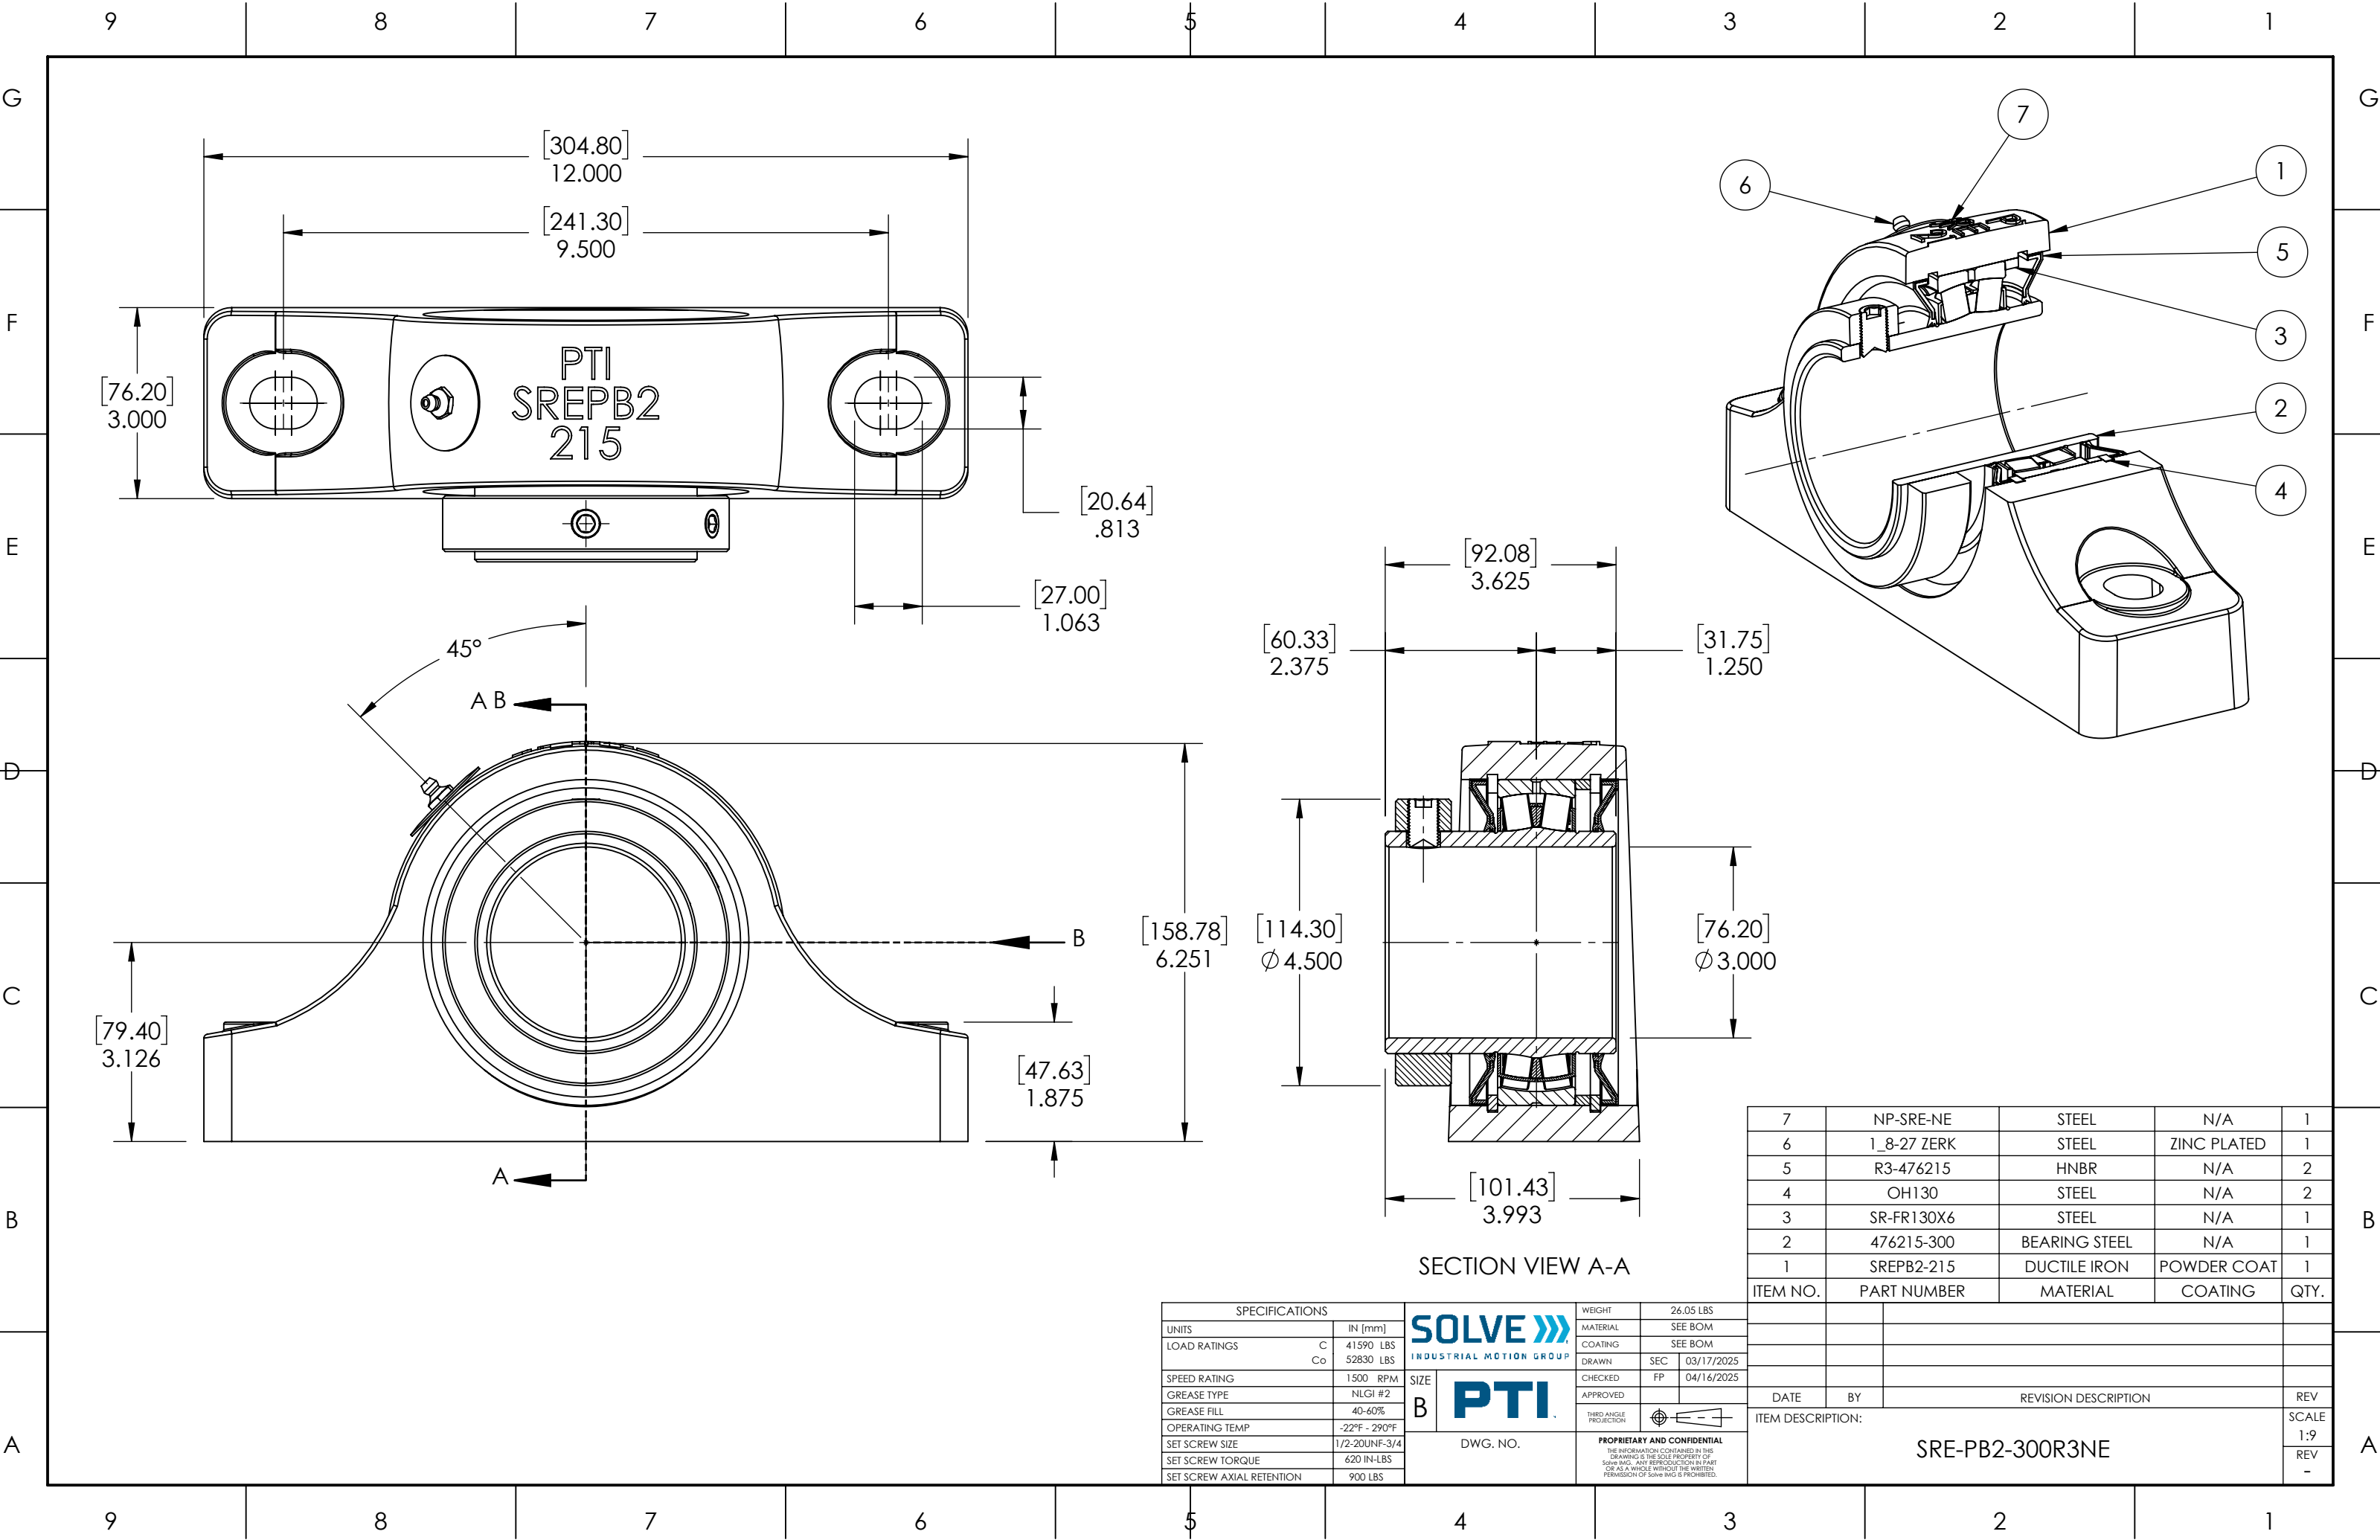

SECTION VIEW A-A

7	NP-SRE-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476215	HNBR	N/A	2
4	OH130	STEEL	N/A	2
3	SR-FR130X6	STEEL	N/A	1
2	476215-300	BEARING STEEL	N/A	1
1	SREP2-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE		WEIGHT	
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	26.05 LBS
LOAD RATINGS	C 41590 LBS Co 52830 LBS	PTI		COATING	SEE BOM
SPEED RATING	1500 RPM	DWG. NO.		DRAWN	SEC 03/17/2025
GREASE TYPE	NLGI #2	B		CHECKED	FP 04/16/2025
GREASE FILL	40-60%	APPROVED		THIRD ANGLE PROJECTION	
OPERATING TEMP	-22°F - 290°F	PROPRIETARY AND CONFIDENTIAL		DATE	
SET SCREW SIZE	1/2-20UNF-3/4	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.		BY	
SET SCREW TORQUE	620 IN-LBS	REV		REVISION DESCRIPTION	
SET SCREW AXIAL RETENTION	900 LBS	SCALE		1:9	

ITEM DESCRIPTION:		SRE-PB2-300R3NE		REV
DATE		BY		-