


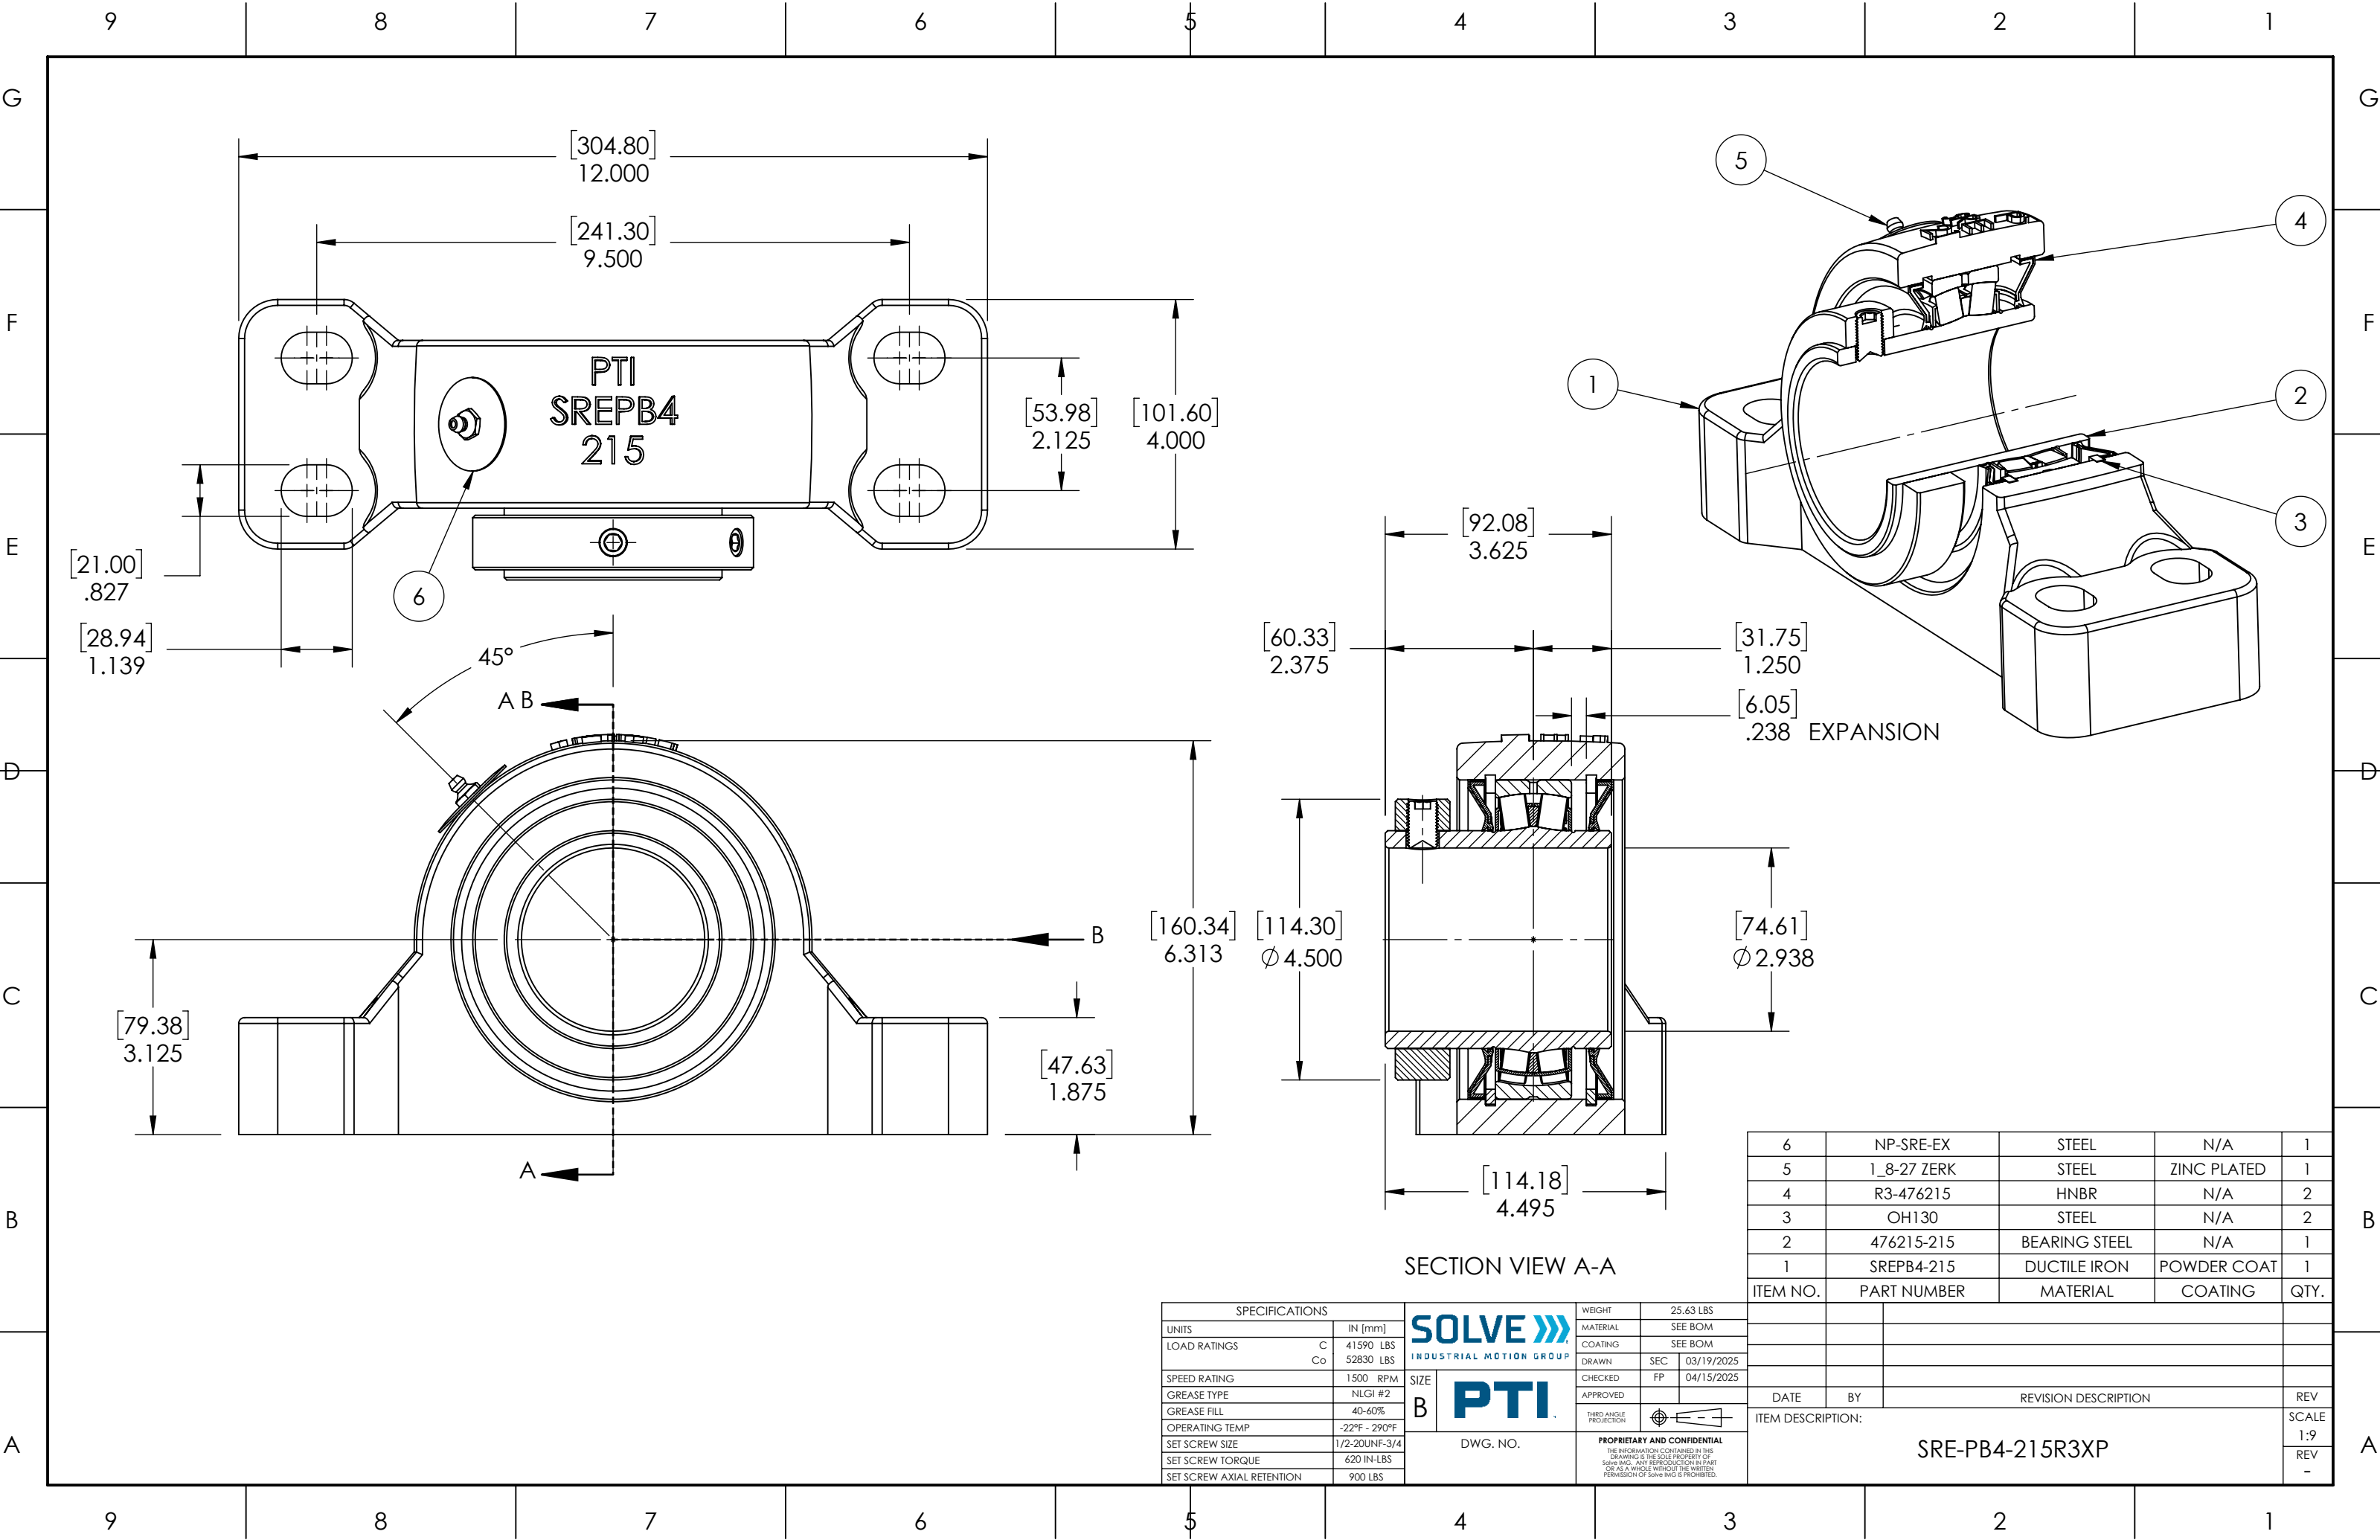

SECTION VIEW A-A

6	NP-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476215	HNBR	N/A	2
3	OH130	STEEL	N/A	2
2	476215-215	BEARING STEEL	N/A	1
1	SREP4-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS			SOLVE INDUSTRIAL MOTION GROUP		WEIGHT	25.63 LBS	
UNITS		IN [mm]	SIZE B	PTI	MATERIAL	SEE BOM	
LOAD RATINGS	C	41590 LBS			COATING	SEE BOM	
	Co	52830 LBS			DRAWN	SEC	03/19/2025
SPEED RATING		1500 RPM			CHECKED	FP	04/15/2025
GREASE TYPE		NLGI #2			APPROVED		
GREASE FILL		40-60%			THIRD ANGLE PROJECTION		
OPERATING TEMP		-22°F - 290°F			PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.		
SET SCREW SIZE		1/2-20UNF-3/4			DWG. NO.		
SET SCREW TORQUE		620 IN-LBS					
SET SCREW AXIAL RETENTION		900 LBS					