


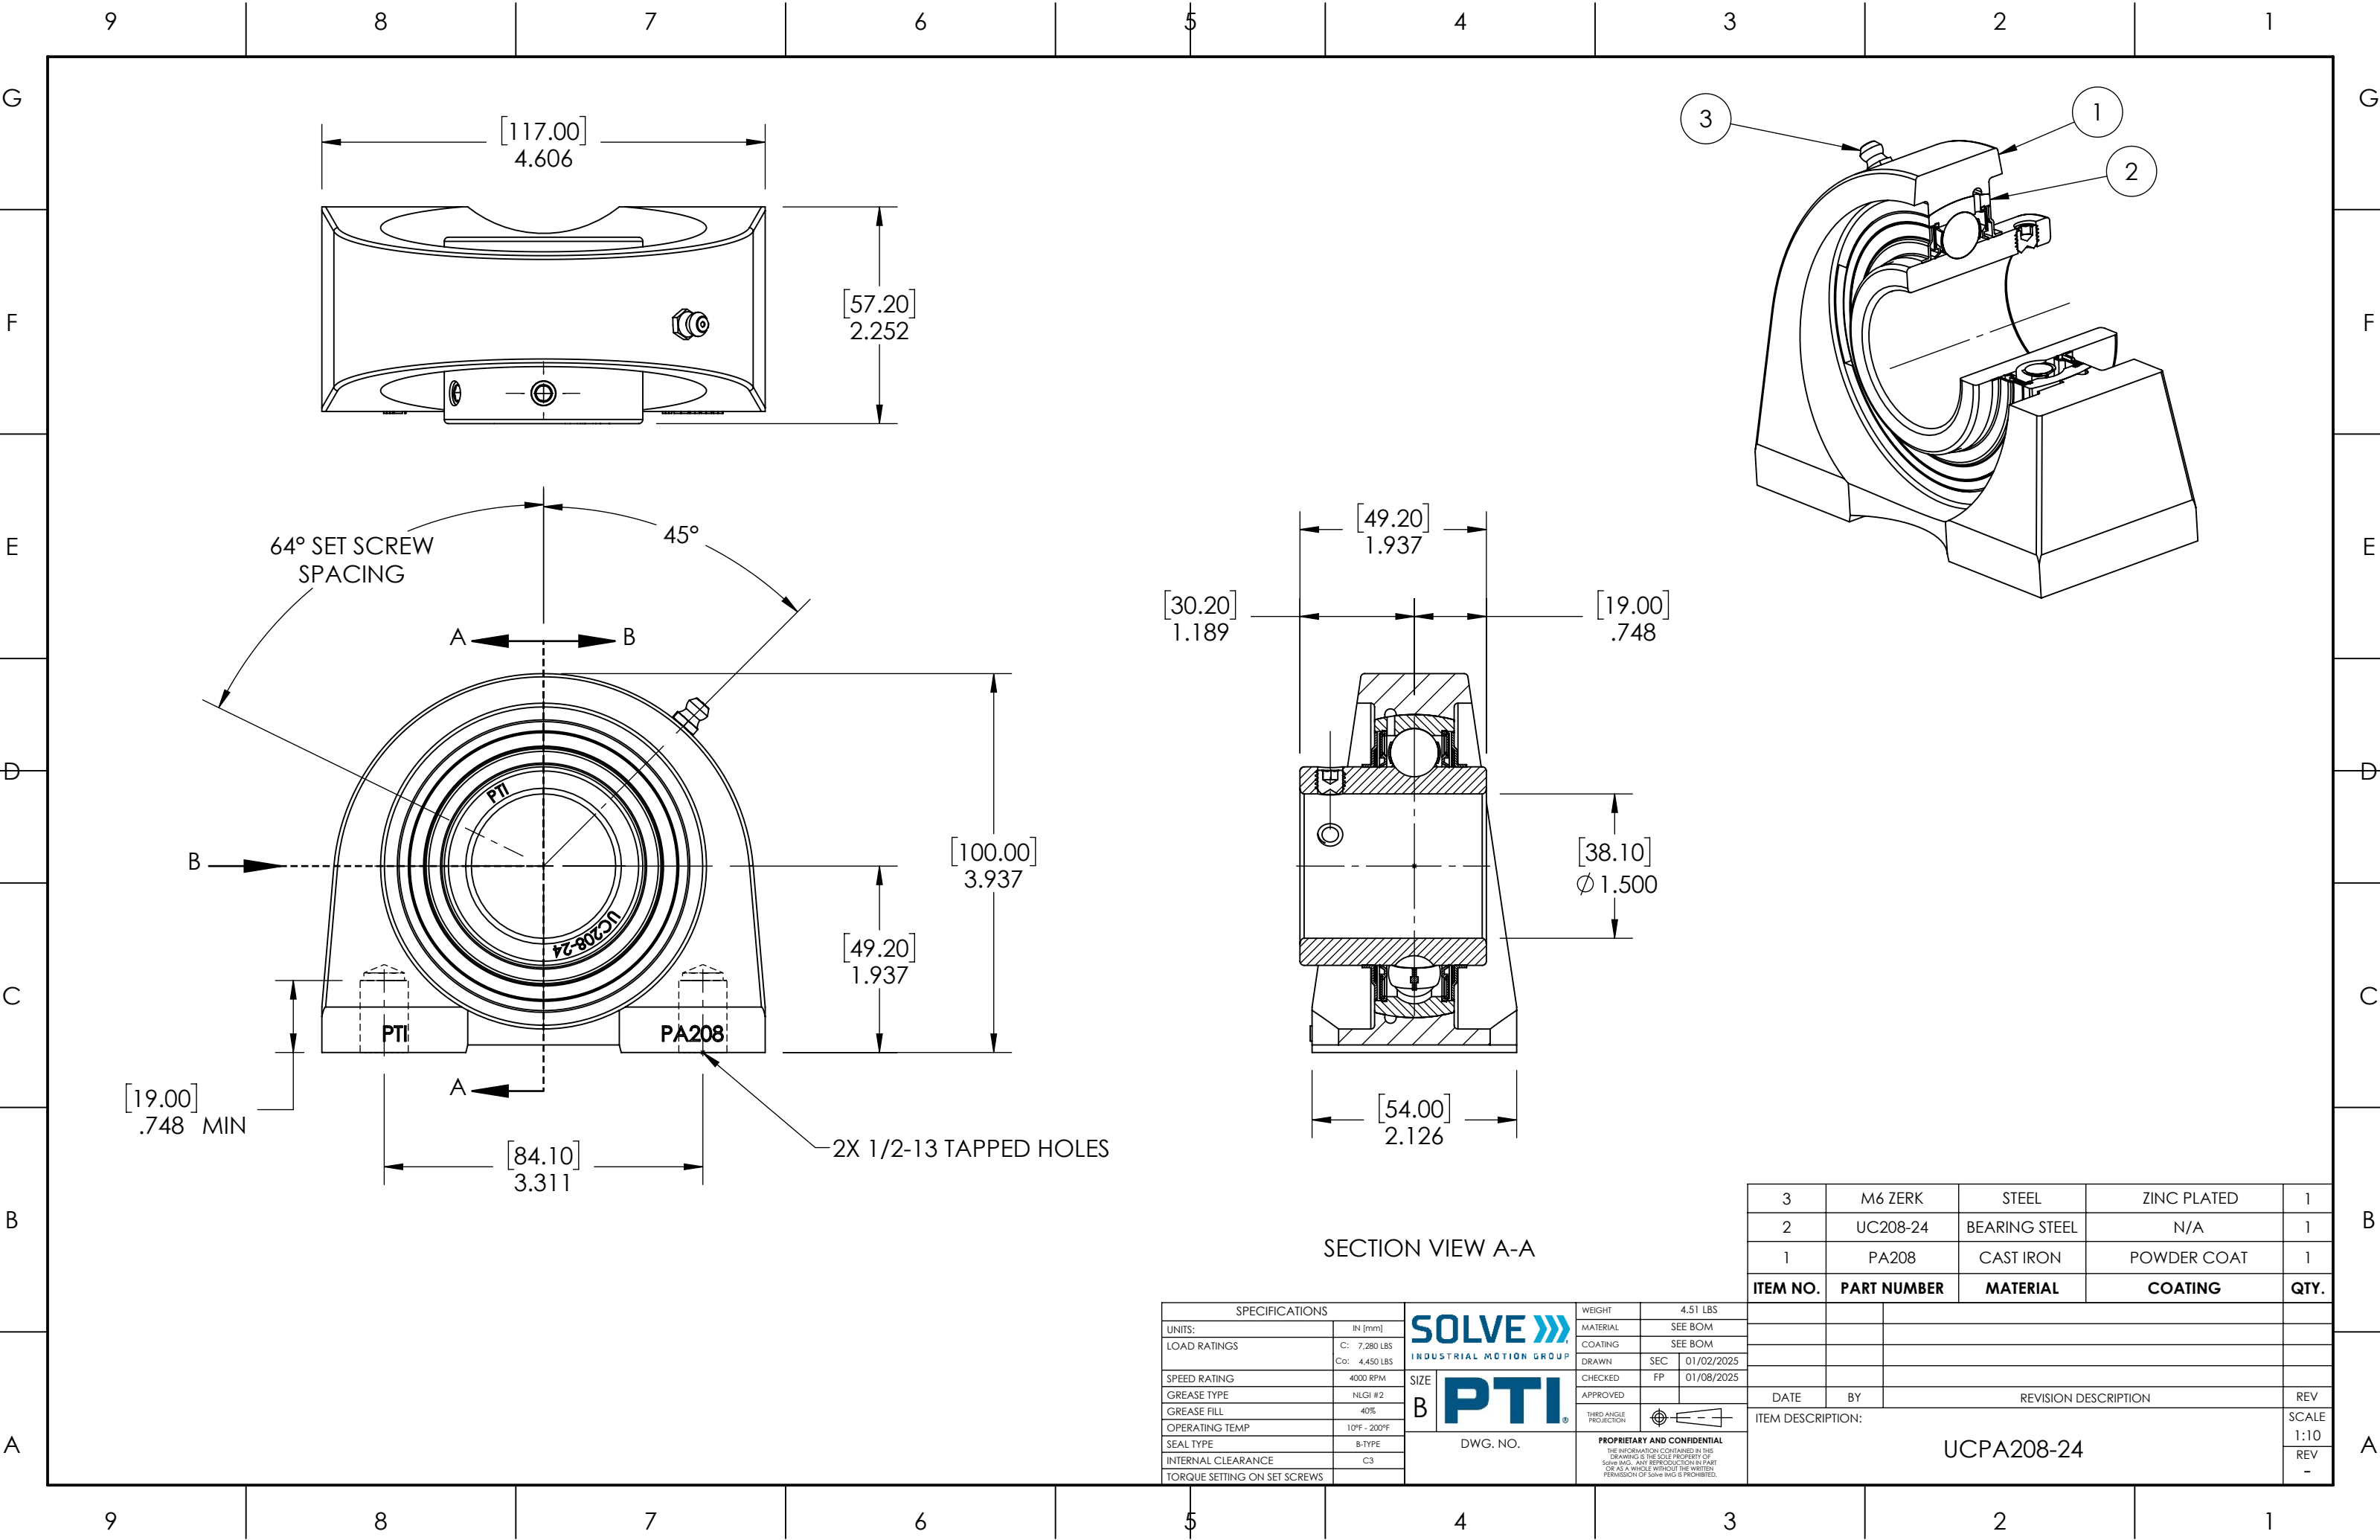

SECTION VIEW A-A

SPECIFICATIONS		 SOLVE  INDUSTRIAL MOTION GROUP		WEIGHT		4.51 LBS	
UNITS:	IN [mm]			MATERIAL		SEE BOM	
LOAD RATINGS	C: 7,280 LBS Co: 4,450 LBS	SIZE B	 PTI ®	COATING		SEE BOM	
SPEED RATING	4000 RPM			DRAWN	SEC	01/02/2025	
GREASE TYPE	NLGI #2			CHECKED	FP	01/08/2025	
GREASE FILL	40%			APPROVED			
OPERATING TEMP	10°F - 200°F			THIRD ANGLE PROJECTION			
SEAL TYPE	B-TYPE	DWG. NO.		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.			
INTERNAL CLEARANCE	C3						
TORQUE SETTING ON SET SCREWS							

3	M6 ZERK	STEEL	ZINC PLATED	1
2	UC208-24	BEARING STEEL	N/A	1
1	PA208	CAST IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION: UCPA208-24				SCALE 1:10
				REV -